

8

GENERAL INFORMATION

Abbreviation	Description	Abbreviation.....	Description
mt	mount, mountain	ODALS.....	Omnidirectional Approach Lighting System
MTAF	Mandatory Traffic Advisory Frequency	ODO	Operations Duty Officer
MTCA	Military Terminal Control Area	offl	official
mtlhy	monthly	OIC.....	Officer In Charge
MUAC	Military Upper Area Control	OLF	Outlying Field
muni	municipal	OLS	Optical Landing System
MWARA	Major World Air Route Area	OM.....	Outer Marker, ILS
N	North	opr	operate, operator, operational
N/A	not applicable	OPS, ops.....	operations
NA.....	not authorized (For Instrument Approach Procedure take-off and alternate MINIMA only)	orig.....	original
NAAS	Naval Auxiliary Air Station	OROCA	Off Route Obstruction Clearance Altitude
NADC.....	Naval Air Development Center	ORTCA.....	Off Route Terrain Clearance Altitude
NADEP.....	Naval Air Depot	OT	other times
NAEC.....	Naval Air Engineering Center	OTS	out of service
NAES	Naval Air Engineering Station	outbd.....	outbound
NAF	Naval Air Facility	ovft.....	overflight
NALCO	Naval Air Logistics Control Office	ovrn.....	overrun
NALF	Naval Auxiliary Landing Field	OX.....	oxygen
NALO	Navy Air Logistics Office	P/L	plain language
NAS	Naval Air Station	PAC	Pacific (ICAO Region)
NAT	North Atlantic (ICAO Region)	PAEW	personnel and equipment working
natl	national	PALS	Precision Approach and Landing System (NAVY)
nav	navigation	PAPI	Precision Approach Path Indicator
navaid	navigation aid	PAR	Precision Approach Radar
NAVMTO	Navy Material Transportation Office	para.....	paragraph
NAWC.....	Naval Air Warfare Center	parl	parallel
NAWS	Naval Air Weapons Station	pat	pattern
NCRP.....	Non-Compulsory Reporting Point	PAX	Passenger
NDB	Non-Directional Radio Beacon	PCL	pilot controlled lighting
NE.....	Northeast	pent.....	penetrate
nec	necessary	perm.....	permanent
NEW.....	Net Explosives Weight	perms	permission
ngt.....	night	pers	personnel
NM	nautical miles	PFC	Porous Friction Courses
nml.....	normal	PJE	Parachuting Activities/Exercises
NMR.....	nautical mile radius	p-line	power line
No or Nr.....	number	PM	Post meridian, noon til midnight
NOLF	Naval Outlying Field	PMRF	Pacific Missile Range Facility
NORDO	Lost communications or no radio installed/available in aircraft	PMSV	Pilot-to-Metro Service
NOTAM	Notice to Airmen	PN	prior notice
Nov.....	November	POB	persons on board
npl.....	non precision instrument	POL	Petrol, Oils and Lubricants
Nr or No	number	posn	position
NS	Naval Station	PPR.....	prior permission required
NS ABTMT	Noise Abatement	prcht.....	parachute
NSA	Naval Support Activity	pref	prefer
NSF	Naval Support Facility	prev	previous
NSTD, nstd.....	nonstandard	prim	primary
ntc.....	notice	prk	park
NVD.....	Night Vision Devices	PRM	Precision Runway Monitor
NVG.....	Night Vision Goggles	pro	procedure
NW	Northwest	proh	prohibited
NWC.....	Naval Weapons Center	pt.....	point
O/A	On or about	PTD	Pilot to Dispatcher
O/S	out of service	pub	publication
O/R.....	On Request	publ.....	publish
OAT	Operational Air Traffic	PVASI	Pulsating Visual Approach Slope Indicator
obsn.....	observation	pvt	private
obst	obstruction	pwr.....	power
OCA	Oceanic Control Area	QFE.....	Altimeter Setting above station
ocnl	occasional		
Oct	October		

Legend 1D. Abbreviations.

©ASA

GENERAL INFORMATION

9

Abbreviation	Description	Abbreviation	Description
QNE	Altimeter Setting of 29.92 inches which provides height above standard datum plane	SAR	Search and Rescue
QNH	Altimeter Setting which provides height above mean sea level	Sat.	Saturday
qtrs	quarters	SAVASI	Simplified Abbreviated Visual Approach Slope Indicator
quad	quadrant	SAWRS	Supplement Aviation Weather Reporting Station
R/T	Radiotelephony	sby	standby
R/W	Rotary/Wing	Sched	scheduled services
RACON	Radar Beacon	sctr	sector
rad	radius, radial	SDF	Simplified Directional Facility
RAIL	Runway Alignment Indicator Lights	SE	Southeast
RAMCC	Regional Air Movement Control Center	sec.	second, section
R-AOE	Regular Airport of Entry	secd	secondary
RAPCON	Radar Approach Control (USAF)	SELCAL	Selective Calling System
RATCF	Radar Air Traffic Control Facility (Navy)	SELF	Strategic Expeditionary Landing Field
RCAG	Remote Center Air to Ground Facility	SEng	Single Engine
RCAGL	Remote Center Air to Ground Facility Long Range	Sep	September
RCL	runway centerline	SFA	Single Frequency Approach
RCLS	Runway Centerline Light System	sfc	surface
RCO	Remote Communications Outlet	SFL	Sequence Flashing Lights
rcpt	reception	SFRA	Special Flight Rules Area
RCR	Runway Condition Reading	SID	Standard Instrument Departure
rcv	receive	SIDA	Secure Identification Display Area
rcvr	receiver	SIF	Selective Identification Feature
rdo	radio	sked	schedule
reconst	reconstruct	SM	statute miles
reful	refueling	SOAP	Spectrometric Oil Analysis Program
reg	regulation, regular	SOF	Supervisor of Flying
REIL	Runway End Identifier Lights	SPB	Seaplane Base
rel	reliable	SR	sunrise
relctd	relocated	SRE	Surveillance Radar Element of GCA (Instrument Approach Procedures Identification only)
REP	Reporting Point	SS	sunset
req	request	SSALS/R	Simplified Short Approach Lighting System/with RAIL
RETIL	Rapid Exit Taxiway Indicator Light	SSB	Single Sideband
Rgn	Region	SSR	Secondary Surveillance Radar
Rgnl	Regional	STA	Straight-in Approach
rgt	right	std	standard
rgt tfc	right traffic	stn	station
rlgd	realigned	stor	storage
RLLS	Runway Lead-in Light System	str-in	Straight-in
rmk	remark	stu	student
rng	range, radio range	subj	subject
RNP	Required Navigation Performance	sum	summer
RON	Remain Overnight	Sun	Sunday
Rot Lt or Bcn	Rotating Light or Beacon	sur	surround
RPI	Runway Point of Intercept	survl	survival, surveillance
rpt	report	suspd	suspended
rqr	require	svc	service
RR	Railroad	svcg	servicing
RRP	Runway Reference Point	SW	Southwest
RSC	Runway Surface Condition	sys	system
RSDU	Radar Storm Detection Unit	TA	Transition Altitude
RSE	Runway Starter Extension/Starter Strip	TAC	Tactical Air Command
RSRS	Reduced Same Runway Separation	TAF	Aerodrome (terminal or alternate) forecast in abbreviated form
rstd	restricted	TALCE	Tanker Aircraft Control Element
rte	route	TCA	Terminal Control Area
ruf	rough	TCH	Threshold Crossing Height
RVR	Runway Visual Range	TCTA	Transcontinental Control Area
RVSM	Reduced Vertical Separation Minima	TD	Touchdown
rwy	runway	TDWR	Terminal Doppler Weather Radar
S	South	TDZ	Touchdown Zone
S/D	Seadrome	TDZL	Touchdown Zone Lights
SALS	Short Approach Lighting System		

Legend 1E. Abbreviations.

©ASA

10

GENERAL INFORMATION

Abbreviation	Description	Abbreviation	Description
tfc	traffic	vcnty	vicinity
thld	threshold	VDF	Very High Frequency Direction Finder
thou	thousand	veh	vehicle
thru	through	vert	vertical
Thu	Thursday	VFR	Visual Flight Rules
til	until	VFR-S	FLIP VFR Supplement
tkf, tkof	take-off	VHF	Very High Frequency (30 to 300 MHz)
TLv	Transition Level	VIP	Very Important Person
tmpry	temporary	vis	visibility
TODA	Take-Off Distance Available	VMC	Visual Meteorological Conditions
TORA	Take-Off Run Available	VOIP	Voice Over Internet Protocol
TP	Tire Pressure	VOLMET	Meteorological Information for Aircraft in Flight
TPA	Traffic Pattern Altitude	VOT	VOR Receiver Testing Facility
TRACON	Terminal Radar Approach Control (FAA)		
tran	transient	W	Warning Area (followed by identification), Watts, West, White
trans	transmit	WCH	Wheel Crossing Height
trml	terminal	Wed	Wednesday
trng	training	Wg	Wing
trns	transition	WIE	with immediate effect
TRSA	Terminal Radar Service Area	win	winter
Tue	Tuesday	WIP	work in progress
TV	Television	WSO	Weather Service Office
TWEB	Transcribed Weather Broadcast	WSFO	Weather Service Forecast Office
twr	tower	wk	week
twy	taxiway	wkd	weekday
		wkly	weekly
UACC	Upper Area Control Center (used outside US)	wng	warning
UAS	Unmanned Aerial Systems	wo	without
UC	Under Construction	WSP	Weather System Processor
UCN	Urgent Change Notice	wt	weight
UDA	Upper Advisory Area	wx	weather
UDF	Ultra High Frequency Direction Finder		
UFN	until further notice	yd	yard
UHF	Ultra High Frequency (300 to 3000 MHz)	yr	year
UIR	Upper Flight Information Region		
unauthd	unauthorized	Z	Greenwich Mean Time (time groups only)
unavbl	unavailable		
unctl	uncontrolled		
unk	unknown		
unlgtd	unlighted		
unltd	unlimited		
unmrk	unmarked		
unmto	unmonitored		
unrel	unreliable		
unrstd	unrestricted		
unsatfy	unsatisfactory		
unsked	unscheduled		
unsvc	unserviceable		
unuse, unusbl	unusable		
USA	United States Army		
USAF	United States Air Force		
USB	Upper Side Band		
USCG	United States Coast Guard		
USMC	United States Marine Corps		
USN	United States Navy		
UTA	Upper Control Area		
UTC	Coordinated Universal Time		
V	Defense Switching Network (telephone, formerly AUTOVON)		
VSTOL	Vertical and Short Take-off and Landing aircraft		
VAL	Visiting Aircraft Line		
var	variation (magnetic variation)		
VASI	Visual Approach Slope Indicator		

Legend 1F. Abbreviations.

©ASA

GENERAL INFORMATION

7

Abbreviation Description

instl.....	install
instr.....	instruction
int.....	intersection
intcntl.....	intercontinental
intcp.....	intercept
intl.....	international
intmt.....	intermittent
ints.....	intense, intensity
invof.....	in the vicinity of
irreg.....	Irregularly
Jan.....	January
JASU.....	Jet Aircraft Starting Unit
JATO.....	Jet Assisted Take-Off
JOAP.....	Joint Oil Analysis Program
JOSAC.....	Joint Operational Support Airlift Center
JRB.....	Joint Reserve Base
Jul.....	July
Jun.....	June
K or Kt.....	Knots
kHz.....	kilohertz
KLAS.....	Knots Indicated Airspeed
KLIZ.....	Korea Limited Identification Zone
km.....	Kilometer
kw.....	kilowatt
L.....	Compass locator (Component of ILS system) under 25 Watts, 15 NM, Enroute Low Altitude Chart (followed by identification)
L.....	Local Time
LAA.....	Local Airport Advisory
LAHSO.....	Land and Hold-Short Operations
L-AOE.....	Limited Airport of Entry
LAWRS.....	Limited Aviation Weather Reporting Station
lb, lbs.....	pound (weight)
LC.....	local call
lcl.....	local
LCP.....	French Peripheral Classification Line
lctd.....	located
lctn.....	location
lctr.....	locator
LCVASI.....	Low Cost Visual Approach Slope Indicator
lczr.....	localizer
LD.....	long distance
LDA.....	Landing Distance Available
ldg.....	landing
LDIN.....	Lead-in Lights
LDOCF.....	Long Distance Operations Control Facility
len.....	length
lgt, lgtd, lgts.....	light, lighted, lights
LIRL.....	Low Intensity Runway Lights
LLWAS.....	Low-Level Wind Shear Alert System
LLZ.....	Localizer (Instrument Approach Procedures Identification only)
LMM.....	Compass locator at Middle Marker ILS
lo.....	low
LoALT or LA.....	Low Altitude
LOC.....	Localizer
LOM.....	Compass locator at Outer Marker ILS
LR.....	Long Range, Lead Radial
LRA.....	Landing Rights Airport
LRRS.....	Long Range RADAR Station

Abbreviation Description

LSB.....	lower side band
ltd.....	limited
M.....	meters, magnetic (after a bearing), Military Circuit (Telephone)
MACC.....	Military Area Control Center
mag.....	magnetic
maint.....	maintain, maintenance
maj.....	major
MALS.....	Medium Intensity Approach Lighting System
MALSF.....	MALS with Sequenced Flashers
MALSR.....	MALS with Runway Alignment Indicator Lights
Mar.....	March
MARA.....	Military Activity Restricted Area
MATO.....	Military Air Traffic Operations
MATZ.....	Military Aerodrome Traffic Zone
max.....	maximum
mb.....	millibars
MCAC.....	Military Common Area Control
MCAF.....	Marine Corps Air Facility
MCALF.....	Marine Corps Auxiliary Landing Field
MCAS.....	Marine Corps Air Station
MCB.....	Marine Corps Base
MCC.....	Military Climb Corridor
MCOLF.....	Marine Corps Outlying Field
MDA.....	Minimum Descent Altitude
MEA.....	Minimum Enroute Altitude
med.....	medium
MEHT.....	Minimum Eye Height over Threshold
mem.....	memorial
MET.....	Meteorological, Meteorology
METAR.....	Aviation Routine Weather Report (in international MET figure code)
METRO.....	Pilot-to-Metro voice cell
MF.....	Medium Frequency (300 to 3000 KHz), Mandatory Frequency (Canada)
MFA.....	Minimum Flight Altitude
mgmt.....	Management
mgr.....	manager
MHz.....	Megahertz
mi.....	mile
MID/ASIA.....	Middle East/Asia (ICAO Region)
MIJI.....	Meaconing, Intrusion, Jamming, and Interference
Mil, mil.....	military
min.....	minimum, minute
MIRL.....	Medium Intensity Runway Lights
misl.....	missile
mkr.....	marker (beacon)
MM.....	Middle Marker of ILS
mnt.....	monitor
MOA.....	Military Operations Area
MOCA.....	Minimum Obstruction Clearance Altitude
mod.....	modify
MOG.....	Maximum (aircraft) on the Ground
Mon.....	Monday
MP.....	Maintenance Period
MR.....	Medium Range
MRA.....	Minimum Reception Altitude
mrk.....	mark, marker
MSAW.....	minimum safe altitude warning
msg.....	message
MSL.....	Mean Sea Level
msn.....	Mission

Legend 1C. Abbreviations.

©ASA

4

GENERAL INFORMATION

ABBREVIATIONS

The following abbreviations/acronyms are those commonly used within this Directory. Other abbreviations/acronyms may be found in the Legend and are not duplicated below. The abbreviations presented are intended to represent grammatical variations of the basic form. (Example—"req" may mean "request", "requesting", "requested", or "requests").

Abbreviation	Description	Abbreviation.....	Description
A/G	air/ground	AM	Amplitude Modulation, midnight til noon
AAF	Army Air Field	AMC	Air Mobility Command
AAS	Airport Advisory Service	amdt.....	amendment
AB	Airbase	AMSL	Above Mean Sea Level
abm	abeam	ANGS	Air National Guard Station
ABn	Aerodrome Beacon	ant	antenna
abv	above	AOE.....	Airport/Aerodrome of Entry
ACC	Air Combat Command Area Control Center	AP	Area Planning
acft	aircraft	APAPI	Abbreviated Precision Approach Path Indicator
ACLS.....	Automatic Carrier Landing System	apch	approach
act	activity	apn.....	apron
ACWS	Aircraft Control and Warning Squadron	APP	Approach Control
ADA	Advisory Area	Apr	April
ADCC	Air Defense Control Center	aprx.....	approximate
ADCUS.....	Advise Customs	APU	Auxiliary Power Unit
addn	addition	apv, apvl	approve, approval
ADF	Automatic Direction Finder	ARB.....	Air Reserve Base
adj.....	adjacent	ARCAL (CANADA)	Aircraft Radio Control of Aerodrome Lighting
admin	administration	ARFF	Aircraft Rescue and Fire Fighting
ADR.....	Advisory Route	ARINC	Aeronautical Radio Inc
adv.....	advise	arg.....	arrange
advsy	advisory	arpt	airport
AEIS.....	Aeronautical Enroute Information Service	arr	arrive
AER	approach end rwy	ARS.....	Air Reserve Station
AFA.....	Army Flight Activity	ARSA.....	Airport Radar Service Area
AFB	Air Force Base	ARSR.....	Air Route Surveillance Radar
afct	affect	ARTCC	Air Route Traffic Control Center
AFFF	Aqueous Film Forming Foam	AS	Air Station
AFHP	Air Force Heliport	ASAP	as soon as possible
AFIS.....	Aerodrome Flight Information Service	ASDA.....	Accelerate-Stop Distance Available
afld	airfield	ASDE.....	Airport Surface Detection
AFOD	Army Flight Operations Detachment	ASDE-X	Airport Surface Detection Equipment-Model X
AFR	Air Force Regulation	asgn	assign
AFRC	Armed Forces Reserve Center/Air Force Reserve Command	ASL	Above Sea Level
AFRS	American Forces Radio Stations	ASOS.....	Automated Surface Observing System
AFS.....	Air Force Station	ASR	Airport Surveillance Radar
AFSS	Automated Flight Service Station	ASSC	Airport Surface Surveillance Capability
AFTN	Aeronautical Fixed Telecommunication Network	ASU	Aircraft Starting Unit
AG	Agriculture	ATA	Actual Time of Arrival
A-G, A-GEAR	Arresting Gear	ATC	Air Traffic Control
agcy	Agency	ATCC	Air Traffic Control Center
AGL	above ground level	ATCT	Airport Traffic Control Tower
AHP	Army heliport	ATD	Actual Time of Departure Along Track Distance
AID	Airport Information Desk	ATIS	Automatic Terminal Information Service
AIS	Aeronautical Information Services	ATS	Air Traffic Service
AL	Approach and Landing Chart	attn	attention
ALF.....	Auxiliary Landing Field	Aug	August
ALS.....	Approach Light System	auth.....	authority
ALSF-1	High Intensity ALS Category I configuration with sequenced Flashers (code)	auto.....	automatic
ALSF-2	High Intensity ALS Category II configuration with sequenced Flashers (code)	AUW	All Up Weight (gross weight)
alt.....	altitude	aux	auxiliary
altn	alternate	AVASI	abbreviated VASI
		avbl	available
		AvGas	Aviation gasoline
		avn	aviation
		AvOil.....	aviation oil

Legend 1. Abbreviations.

©ASA

GENERAL INFORMATION

5

Abbreviation Description

AWOS.....Automatic Weather Observing System
AWSS.....Automated Weather Sensor System
awtawait
awyairway
azazimuth

BAbraking action
BASHBird Aircraft Strike Hazard
BCback course
bcnbeacon
bcst.....broadcast
bdryboundary
bldg.....building
blkd.....blocked
blo, blwbelow
BOQBachelor Officers Quarters
brgbearing
btnbetween
bus.....business
bydbeyond

C.....Commercial Circuit (Telephone)
CAC.....Centralized Approach Control
cap.....capacity
catcategory
CATClear Air Turbulence
CCW or cntclkws.....counterclockwise
ceil.....ceiling
CERAPCenter Radar Approach Control
CGCoast Guard
CGAFCoast Guard Air Facility
CGASCoast Guard Air Station
CH, chanchannel
CHAPIChase Helicopter Approach Path
Indicator
chg.....change
chtchart
circircle, circling
CIV, civCivil, civil, civilian
ckcheck
CL.....Centerline Lighting System
clclass
clnc.....clearance
clsdclosed
CNATRAChief of Naval Air Training
cnlcancel
cntrcenter
cntrln.....centerline
Co.....Company, County
COCommanding Officer
com.....communication
comd.....command
ComdrCommander
coml.....commercial
compulcompulsory
comsncommission
concconcrete
condcondition
constconstruction
cont.....continue
CONUS.....Continental United States
convlconventional
coordcoordinate
copter.....helicopter
corrcorrect
CPDLC.....Controller Pilot Data Link
Communication

Abbreviation Description

crdr.....corridor
croscross
CRPCompulsory Reporting Point
crscourse
CScall sign
CSTMS.....Customs
CTA.....Control Area
CTAF.....Common Traffic Advisory Frequency
ctccontact
ctl.....control
CTLZ.....Control Zone
CVFRControlled Visual Flight Rules Areas
CWClockwise, Continuous Wave, Carrier
Wave
dalgtdaylight
D-ATIS.....Digital Automatic Terminal Information
Service
dayltdaylight
db.....decibel
DCLDeparture Clearance
Dec.....December
decom.....decommission
degdegree
deldelivery
depdepart
DEPDeparture Control
destn.....destination
det.....detachment
DFDirection Finder
DH.....Decision Height
DIAPDoD Instrument Approach Procedure
direcdirectional
disem.....disseminate
displdisplace
distdistrict, distance
divdivision
DLDirect Line to FSS
dlt.....delete
dlydaily
DMEDistance Measuring Equipment (UHF
standard, TACAN compatible)
DNVTDigital Non-Secure Voice Telephone
DoDDepartment of Defense
drct.....direct
DSNDefense Switching Network (Telephone)
DSNDefense Switching Network
dspcddisplaced
DTDaylight Savings Time
dur.....during
durn.....duration
DVDistinguished Visitor
EEast
eaeach
EATExpected Approach Time
ECNEnroute Change Notice
EFAS.....Enroute Flight Advisory Service
eff.....effective, effect
E-HAEnroute High Altitude
E-LA.....Enroute Low Altitude
elev.....elevation
ELTEmergency Locator Transmitter
EMAS.....Engineered Material Arresting System
emerg.....emergency
engengine

Legend 1A. Abbreviations.

©ASA

6

GENERAL INFORMATION

Abbreviation	Description
EOR	End of Runway
eqpt	equipment
ERDA	Energy Research and Development Administration
E-S	Enroute Supplement
est	estimate
estab	establish
ETA	Estimated Time of Arrival
ETD	Estimated Time of Departure
ETE	Estimated Time Enroute
ETS	European Telephone System
EUR	European (ICAO Region)
ev	every
evac	evacuate
exc	except
excl	exclude
exer	exercise
exm	exempt
exp	expect
extd	extend
extr	extension
extv	extensive
F/W	Fixed Wing
FAA	Federal Aviation Administration
fac	facility
FAWS	Flight Advisory Weather Service
fax	facsimile
FBO	Fixed Base Operator
FCC	Flight Control Center
FCG	Foreign Clearance Guide
FCLP	field carrier landing practice
fcst	forecast
Feb	February
FIC	Flight Information Center
FIH	Flight Information Handbook
FIR	Flight Information Region
FIS	Flight Information Service
FL	flight level
fld	field
flg	flashing
FLIP	Flight Information Publication
flt	flight
flw	follow
FM	Fan Marker, Frequency Modulation
FOC	Flight Operations Center
FOD	Foreign Object Damage
fone	telephone
FPL	Flight Plan
fpn	feet per minute
fr	from
freq	frequency, frequent
Fri	Friday
frng	firing
FSC	Flight Service Center
FSS	Flight Service Station
ft	foot
ftr	fighter
GA	Glide Angle
gal	gallon
GAT	General Air Traffic (Europe-Asia)
GCA	Ground Control Approach
GCO	Ground Communication Outlet
glidr	glider
GND	Ground Control
gnd	ground

Abbreviation	Description
govt	government
GP	Glide Path
Gp	Group
GPI	Ground Point of Intercept
grad	gradient
grd	guard
GS	glide slope
GWT	gross weight
H	Enroute High Altitude Chart (followed by identification)
H+	Hours or hours plus...minutes past the hour
H24	continuous operation
HAA	Height Above Airport/Aerodrome
HAL	Height Above Landing Area
HAR	Height Above Runway
HAT	Height Above Touchdown
haz	hazard
hdg	heading
HDTA	High Density Traffic Airport/Aerodrome
HF	High Frequency (3000 to 30,000 KHz)
hgr	hangar
hgt	height
hi	high
HIRL	High Intensity Runway Lights
HIWAS	Hazardous Inflight Weather Advisory Service
HO	Service available to meet operational requirements
hol	holiday
HOLF	Helicopter Outlying Field
hosp	hospital
HQ	Headquarters
hr	hour
HS	Service available during hours of scheduled operations
hsg	housing
hvy	heavy
HW	Heavy Weight
hwy	highway
HX	station having no specific working hours
Hz	Hertz (cycles per second)
I	Island
IAP	Instrument Approach Procedure
IAS	Indicated Air Speed
IAW	in accordance with
ICAO	International Civil Aviation Organization
ident	identification
IFF	Identification, Friend or Foe
IFR	Instrument Flight Rules
IFR-S	FLIP IFR Supplement
IFSS	International Flight Service Station
ILS	Instrument Landing System
IM	Inner Marker
IMC	Instrument Meteorological Conditions
IMG	Immigration
immed	immediate
inbd	inbound
Inc	Incorporated
incl	include
incr	increase
indef	indefinite
info	information
inop	inoperative
inst	instrument

Legend 1B. Abbreviations.

©ASA

VALID 1600Z FOR USE 0900-1500Z. TEMPS NEG ABV 24000									
FT	3000	6000	9000	12000	18000	24000	30000	34000	39000
EMI	2807	2715-07	2728-10	2842-13	2867-21	2891-30	751041	771150	780855
ALB	0210	9900-07	2714-09	2728-12	2656-19	2777-28	781842	760150	269658
PSB		1509+04	2119+01	2233-04	2262-14	2368-26	781939	760850	780456
STL	2308	2613+02	2422-03	2431-08	2446-19	2461-30	760142	782650	760559

Figure 2. Wind and Temperatures Aloft Forecast.

©ASA

12

AIRPORT/FACILITY DIRECTORY LEGEND

1

CITY NAME

SAMPLE

200 B TPA-1000(800) AOE LRA Class IV, ARFF Index A NOTAM FILE ORL Not insp.

JACKSONVILLE
COPTER
H-4G, L-19C
IAP, DIAP, AD

18

AIRPORT NAME (ALTERNATE NAME) (LTS)(KLTS) CIV/MIL 3 N UTC-6(-5DT) N34°41.93' W99°20.20'

200 B TPA-1000(800) AOE LRA Class IV, ARFF Index A NOTAM FILE ORL Not insp.

RWY 18-36: H12004X200 (ASPH-CONC-GRVD)
S-90, D-160, 2D-300 PCN 80 R/B/W/T HIRL CL
RWY 18: RLLS. MALSF. TDZL. REIL. PAPI(P2R)—GA 3.0° TCH 36'.
RVR—TMR. Thld displcd 300'. Trees. Rgt tfc. 0.3% up.
RWY 36: ALSF1. 0.4% down.

RWY 09-27: H6000X150 (ASPH) MIRL
RWY 173-353: H3515X150 (ASPH-PFC) AUW PCN 59 F/A/W/T

9

19

LAND AND HOLD—SHORT OPERATIONS

LDG RWY	HOLD—SHORT POINT	AVBL LDG DIST
RWY 18	09-27	6500
RWY 36	09-27	5400

10

20

RUNWAY DECLARED DISTANCE INFORMATION

RWY 18: TORA-12004 TODA-12004 ASDA-11704 LDA-11504
RWY 36: TORA-12004 TODA-12004 ASDA-12004 LDA-11704

11

21

ARRESTING GEAR/SYSTEM

RWY 18 HOOK E5 (65' OVRN) BAK-14 BAK-12B (1650')
BAK-14 BAK-12B (1087') HOOK E5 (74' OVRN) RWY 36

12

22

SERVICE: S4 FUEL 100LL, JET A OX 1, 3 LGT ACTIVATE MALSR Rwy 29, REIL Rwy 11, VASI Rwy 11, HIRL Rwy 11-29, PAPI Rwy 17 and Rwy 35, MIRL Rwy 17-35—CTAF. **MILITARY—A-GEAR** E-5 connected on dep end, disconnected on apch end.
JASU 3(AM32A-60) 2(A/M32A-86) FUEL J8(Mil)(NC-100, A)
FLUID W SP PRESAIR LOX OIL O-128 MAINT S1 Mon-Fri 1000-2200Z†
TRAN ALERT Avbl 1300-0200Z† svc limited weekends.

13

23

AIRPORT REMARKS: Special Air Traffic Rules—Part 93, see Regulatory Notices. Attended 1200-0300Z†. Parachute Jumping. Deer invof arpt. Heavy jumbo jet training surface to 9000'. Twy A clsd indef. Flight Notification Service (ADCUS) avbl.

14

24

MILITARY REMARKS: ANG PPR/Official Business Only. Base OPS DSN 638-4390, C503-335-4222. Ctc Base OPS 15 minutes prior to ldg and after dep. Limited tran parking.

15

25

AIRPORT MANAGER: (580) 481-5739

16

26

WEATHER DATA SOURCES: AWOS-1 120.3 (202) 426-8000. LAWRS.

17

27

COMMUNICATIONS: SFA CTAF 122.8 UNICOM 122.95 ATIS 127.25 273.5 (202) 426-8003 PTD 372.2
NAME FSS (ORL) on arpt. 123.65 122.65 122.2
NAME RCO 112.2T 112.1R (NAME RADIO)
NAME APP/DEP CON 128.35 257.725 (1200-0400Z†)
TOWER 119.65 255.6 (1200-0400Z†) GND CON 121.7 GCO 135.075 (ORLANDO CLNC) CLNC DEL 125.55
CPDLC D-HZWX, D-TAXI, DCL (LOGON KMEM)
NAME COMD POST (GERONIMO) 311.0 321.4 6761 PMSV METRO 239.8 NAME OPS 257.5

18

28

AIRSPACE: CLASS B See VFR Terminal Area Chart.

19

29

VOR TEST FACILITY (VOT): 116.7

20

30

RADIO AIDS TO NAVIGATION: NOTAM FILE ORL. VHF/DF ctc FSS.
(H) VORTAC 112.2 MCO Chan 59 N28°32.55' W81°20.12' at fld. 1110/8E.
(H) TACAN Chan 29 CBU (109.2) N28°32.65' W81°21.12' at fld. 1115/8E.
HERNY NDB (LOM) 221 OR N28°37.40' W81°21.05' 177° 5.4 NM to fld.
ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.
ASR/PAR (1200-0400Z†)

21

31

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

HELIPAD H1: H100X75 (ASPH)
HELIPAD H2: H60X60 (ASPH)
HELIPORT REMARKS: Helipad H1 lctd on general aviation side and H2 lctd on air carrier side of arpt.

187 TPA 1000(813)
WATERWAY 15-33: 5000X425 (WATER)
SEAPLANE REMARKS: Birds roosting and feeding areas along river banks. Seaplanes operating adjacent to SW side of arpt not visible from twr and are required to ctc twr.

22

All bearings and radials are magnetic unless otherwise specified. All mileages are nautical unless otherwise noted.
All times are Coordinated Universal Time (UTC) except as noted. All elevations are in feet above/below Mean Sea Level (MSL) unless otherwise noted.
The horizontal reference datum of this publication is North American Datum of 1983 (NAD83), which for charting purposes is considered equivalent to World Geodetic System 1984 (WGS 84).

Legend 2. Airport/Facility Directory.

©ASA

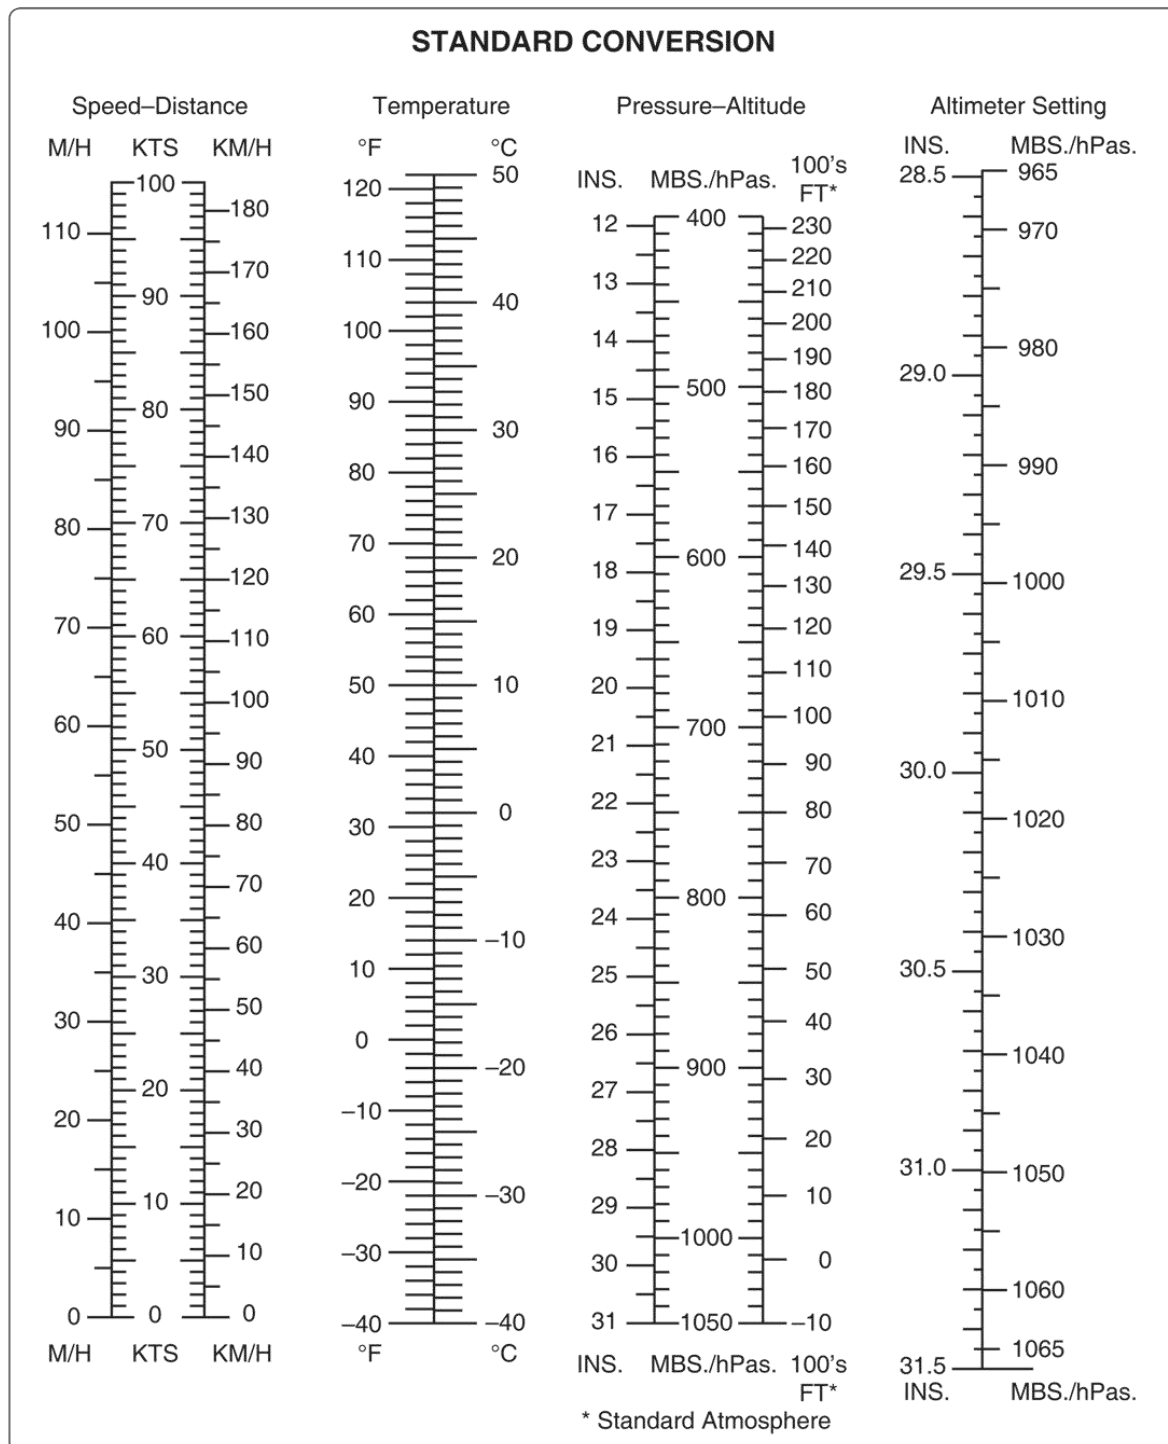


Figure 3. Standard Conversion Chart.

©ASA

AIRPORT/FACILITY DIRECTORY LEGEND

13

10

SKETCH LEGEND

RUNWAYS/LANDING AREAS

Hard Surfaced	
Metal Surface	
Sod, Gravel, etc.	
Light Plane, Ski Landing Area or Water	
Under Construction	
Closed	
Helicopter Landings Area	
Displaced Threshold	
Taxiway, Apron and Stopways ..	

MISCELLANEOUS BASE AND CULTURAL FEATURES

Buildings	
Power Lines	
Fence	
Towers	
Wind Turbine	
Tanks	
Oil Well	
Smoke Stack	
Obstruction	
Controlling Obstruction	
Trees	
Populated Places	
Cuts and Fills	
Cliffs and Depressions ..	
Ditch	
Hill	

RADIO AIDS TO NAVIGATION

VORTAC		VOR	
VOR/DME ..		NDB	
TACAN		NDB/DME	
DME			

MISCELLANEOUS AERONAUTICAL FEATURES

Airport Beacon	
Wind Cone	
Landing Tee	
Tetrahedron	
Control Tower	or TWR

When control tower and rotating beacon are co-located beacon symbol will be used and further identified as TWR.

APPROACH LIGHTING SYSTEMS

A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A1) Negative symbology, e.g., (A1)

(V) indicates Pilot Controlled Lighting (PCL).

Runway Centerline Lighting	
(A) Approach Lighting System ALSF-2 ..	
(A1) Approach Lighting System ALSF-1 ..	
(A2) Short Approach Lighting System SALS/SALSF	
(A3) Simplified Short Approach Lighting System (SSALR) with RAIL	
(A4) Medium Intensity Approach Lighting System (MALS and MALSF)/(SSALS and SSALF)	
(A5) Medium Intensity Approach Lighting System (MALSR) and RAIL	
(D) Omnidirectional Approach Lighting System (ODALS)	
(D) Navy Parallel Row and Cross Bar ..	
(†) Air Force Overrun	
(V) Visual Approach Slope Indicator with Standard Threshold Clearance provided	
(V2) Pulsating Visual Approach Slope Indicator (PVASI)	
(V3) Visual Approach Slope Indicator with a threshold crossing height to accommodate long bodied or jumbo aircraft	
(V4) Tri-color Visual Approach Slope Indicator (TRCV)	
(V5) Approach Path Alignment Panel (APAP)	
(P) Precision Approach Path Indicator (PAPI)	

Legend 3. Airport/Facility Directory.

©ASA

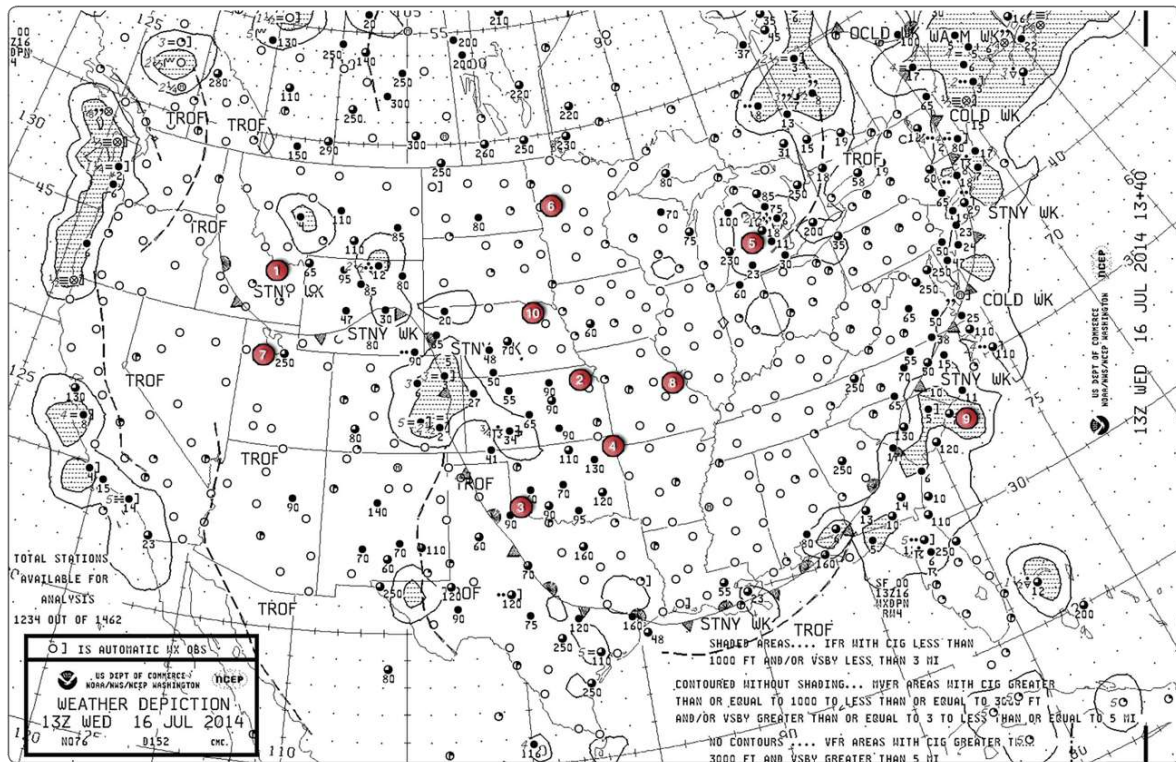


Figure 4. Weather Depiction Chart.

©ASA

14

AIRPORT/FACILITY DIRECTORY LEGEND

LEGEND

This directory is a listing of data on record with the FAA on public-use airports, military airports and selected private-use airports specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally this listing contains data for associated terminal control facilities, air route traffic control centers, and radio aids to navigation within the conterminous United States, Puerto Rico and the Virgin Islands. Civil airports and joint Civil/Military airports which are open to the public are listed alphabetically by state, associated city and airport name and cross-referenced by airport name. Military airports and private-use (limited civil access) joint Military/Civil airports are listed alphabetically by state and official airport name and cross-referenced by associated city name. Nav aids, flight service stations and remote communication outlets that are associated with an airport, but with a different name, are listed alphabetically under their own name, as well as under the airport with which they are associated.

The listing of an airport as open to the public in this directory merely indicates the airport operator's willingness to accommodate transient aircraft, and does not represent that the airport conforms with any Federal or local standards, or that it has been approved for use on the part of the general public. Military airports, private-use airports, and private-use (limited civil access) joint Military/Civil airports are open to civil pilots only in an emergency or with prior permission. See Special Notice Section, Civil Use of Military Fields.

The information on obstructions is taken from reports submitted to the FAA. Obstruction data has not been verified in all cases. Pilots are cautioned that objects not indicated in this tabulation (or on the airports sketches and/or charts) may exist which can create a hazard to flight operation. Detailed specifics concerning services and facilities tabulated within this directory are contained in the Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

The legend items that follow explain in detail the contents of this Directory and are keyed to the circled numbers on the sample on the preceding pages.

① CITY/AIRPORT NAME

Civil and joint Civil/Military airports which are open to the public are listed alphabetically by state and associated city. Where the city name is different from the airport name the city name will appear on the line above the airport name. Airports with the same associated city name will be listed alphabetically by airport name and will be separated by a dashed rule line. A solid rule line will separate all others. FAA approved helipads and seaplane landing areas associated with a land airport will be separated by a dotted line. Military airports and private-use (limited civil access) joint Military/Civil airports are listed alphabetically by state and official airport name.

② ALTERNATE NAME

Alternate names, if any, will be shown in parentheses.

③ LOCATION IDENTIFIER

The location identifier is a three or four character FAA code followed by a four-character ICAO code, when assigned, to airports. If two different military codes are assigned, both codes will be shown with the primary operating agency's code listed first. These identifiers are used by ATC in lieu of the airport name in flight plans, flight strips and other written records and computer operations. Zeros will appear with a slash to differentiate them from the letter "O".

④ OPERATING AGENCY

Airports within this directory are classified into two categories, Military/Federal Government and Civil airports open to the general public, plus selected private-use airports. The operating agency is shown for military, private-use and joint use airports. The operating organization is shown by an abbreviation as listed below. When an organization is a tenant, the abbreviation is enclosed in parenthesis. No classification indicates the airport is open to the general public with no military tenant.

A	US Army	MC	Marine Corps
AFRC	Air Force Reserve Command	MIL/CIV	Joint Use Military/Civil Limited Civil Access
AF	US Air Force	N	Navy
ANG	Air National Guard	NAF	Naval Air Facility
AR	US Army Reserve	NAS	Naval Air Station
ARNG	US Army National Guard	NASA	National Air and Space Administration
CG	US Coast Guard	P	US Civil Airport Wherein Permit Covers Use by Transient Military Aircraft
CIV/MIL	Joint Use Civil/Military Open to the Public	PVT	Private Use Only (Closed to the Public)
DND	Department of National Defense Canada		

⑤ AIRPORT LOCATION

Airport location is expressed as distance and direction from the center of the associated city in nautical miles and cardinal points, e.g., 4 NE.

⑥ TIME CONVERSION

Hours of operation of all facilities are expressed in Coordinated Universal Time (UTC) and shown as "Z" time. The directory indicates the number of hours to be subtracted from UTC to obtain local standard time and local daylight saving time UTC-5(-4DT). The symbol ‡ indicates that during periods of Daylight Saving Time (DST) effective hours will be one hour earlier than shown. In those areas where daylight saving time is not observed the (-4DT) and ‡ will not be shown. Daylight saving time is in effect from 0200 local time the second Sunday in March to 0200 local time the first Sunday in November. Canada and all U.S. Conterminous States observe daylight saving time except Arizona and Puerto Rico, and the Virgin Islands. If the state observes daylight saving time and the operating times are other than daylight saving times, the operating hours will include the dates, times and no ‡ symbol will be shown, i.e., April 15-Aug 31 0630-1700Z, Sep 1-Apr 14 0600-1700Z.

Legend 4. Airport/Facility Directory.

©ASA

AIRPORT/FACILITY DIRECTORY LEGEND

15

⑦ GEOGRAPHIC POSITION OF AIRPORT—AIRPORT REFERENCE POINT (ARP)

Positions are shown as hemisphere, degrees, minutes and hundredths of a minute and represent the approximate geometric center of all usable runway surfaces.

⑧ CHARTS

Charts refer to the Sectional Chart and Low and High Altitude Enroute Chart and panel on which the airport or facility is located. Helicopter Chart locations will be indicated as COPTER. IFR Gulf of Mexico West and IFR Gulf of Mexico Central will be depicted as GOMW and GOMC.

⑨ INSTRUMENT APPROACH PROCEDURES, AIRPORT DIAGRAMS

IAP indicates an airport for which a prescribed (Public Use) FAA Instrument Approach Procedure has been published. DIAP indicates an airport for which a prescribed DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures. See the Special Notice Section of this directory, Civil Use of Military Fields and the Aeronautical Information Manual 5-4-5 Instrument Approach Procedure Charts for additional information. AD indicates an airport for which an airport diagram has been published. Airport diagrams are located in the back of each Chart Supplement volume alphabetically by associated city and airport name.

⑩ AIRPORT SKETCH

The airport sketch, when provided, depicts the airport and related topographical information as seen from the air and should be used in conjunction with the text. It is intended as a guide for pilots in VFR conditions. Symbolology that is not self-explanatory will be reflected in the sketch legend. The airport sketch will be oriented with True North at the top. Airport sketches will be added incrementally.

⑪ ELEVATION

The highest point of an airport's usable runways measured in feet from mean sea level. When elevation is sea level it will be indicated as "00". When elevation is below sea level a minus "-" sign will precede the figure.

⑫ ROTATING LIGHT BEACON

B indicates rotating beacon is available. Rotating beacons operate sunset to sunrise unless otherwise indicated in the AIRPORT REMARKS or MILITARY REMARKS segment of the airport entry.

⑬ TRAFFIC PATTERN ALTITUDE

Traffic Pattern Altitude (TPA)—The first figure shown is TPA above mean sea level. The second figure in parentheses is TPA above airport elevation. Multiple TPA shall be shown as "TPA—See Remarks" and detailed information shall be shown in the Airport or Military Remarks Section. Traffic pattern data for USAF bases, USN facilities, and U.S. Army airports (including those on which ACC or U.S. Army is a tenant) that deviate from standard pattern altitudes shall be shown in Military Remarks.

⑭ AIRPORT OF ENTRY, LANDING RIGHTS, AND CUSTOMS USER FEE AIRPORTS

U.S. CUSTOMS USER FEE AIRPORT—Private Aircraft operators are frequently required to pay the costs associated with customs processing.

AOE—Airport of Entry. A customs Airport of Entry where permission from U.S. Customs is not required to land. However, at least one hour advance notice of arrival is required.

LRA—Landing Rights Airport. Application for permission to land must be submitted in advance to U.S. Customs. At least one hour advance notice of arrival is required.

NOTE: Advance notice of arrival at both an AOE and LRA airport may be included in the flight plan when filed in Canada or Mexico. Where Flight Notification Service (ADCUS) is available the airport remark will indicate this service. This notice will also be treated as an application for permission to land in the case of an LRA. Although advance notice of arrival may be relayed to Customs through Mexico, Canada, and U.S. Communications facilities by flight plan, the aircraft operator is solely responsible for ensuring that Customs receives the notification. (See Customs, Immigration and Naturalization, Public Health and Agriculture Department requirements in the International Flight Information Manual for further details.)

U.S. CUSTOMS AIR AND SEA PORTS, INSPECTORS AND AGENTS

Northeast Sector (New England and Atlantic States—ME to MD)	407-975-1740
Southeast Sector (Atlantic States—DC, WV, VA to FL)	407-975-1780
Central Sector (Interior of the US, including Gulf states—MS, AL, LA)	407-975-1760
Southwest East Sector (OK and eastern TX)	407-975-1840
Southwest West Sector (Western TX, NM and AZ)	407-975-1820
Pacific Sector (WA, OR, CA, HI and AK)	407-975-1800

⑮ CERTIFICATED AIRPORT (14 CFR PART 139)

Airports serving Department of Transportation certified carriers and certified under 14 CFR part 139 are indicated by the Class and the ARFF Index; e.g. Class I, ARFF Index A, which relates to the availability of crash, fire, rescue equipment. Class I airports can have an ARFF Index A through E, depending on the aircraft length and scheduled departures. Class II, III, and IV will always carry an Index A.

AIRPORT CLASSIFICATIONS

Type of Air Carrier Operation	Class I	Class II	Class III	Class IV
Scheduled Air Carrier Aircraft with 31 or more passenger seats	X			
Unscheduled Air Carrier Aircraft with 31 or more passengers seats	X	X		X
Scheduled Air Carrier Aircraft with 10 to 30 passenger seats	X	X	X	

Legend 5. Airport/Facility Directory.

©ASA

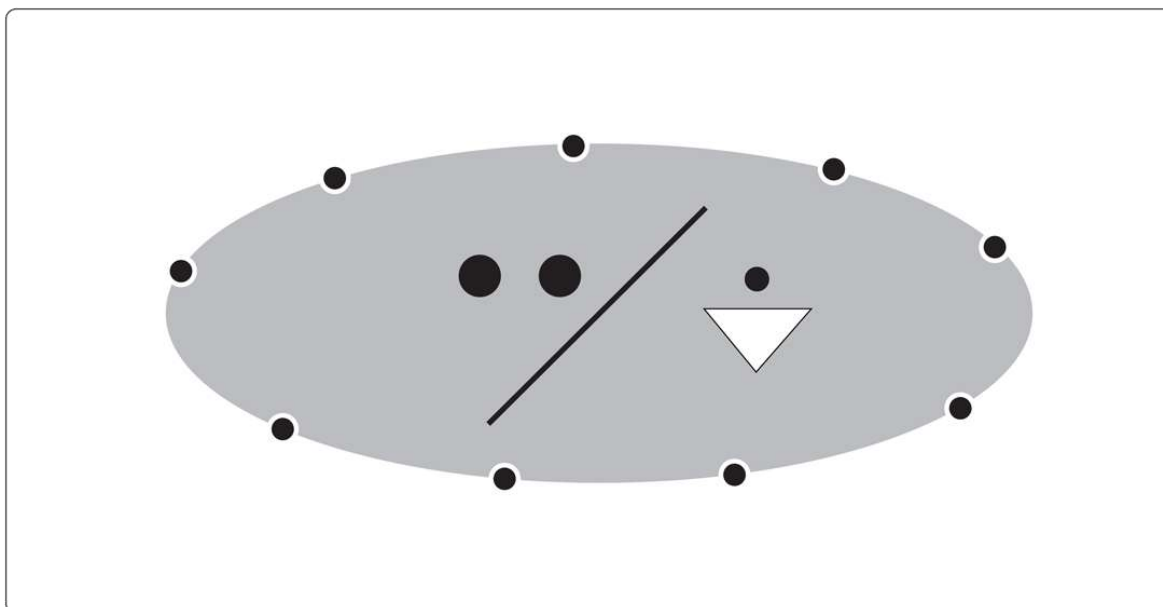


Figure 5. Symbol Used on Low-Level Significant Weather Prognostic Chart.

©ASA

16

AIRPORT/FACILITY DIRECTORY LEGEND

INDICES AND AIRCRAFT RESCUE AND FIRE FIGHTING EQUIPMENT REQUIREMENTS

Airport Index	Required No. Vehicles	Aircraft Length	Scheduled Departures	Agent + Water for Foam
A	1	<90'	≥1	500#DC or HALON 1211 or 450#DC + 100 gal H ₂ O
B	1 or 2	≥90', <126'	≥5	Index A + 1500 gal H ₂ O
		≥126', <159'	<5	
C	2 or 3	≥126', <159'	≥5	Index A + 3000 gal H ₂ O
		≥159', <200'	<5	
D	3	≥159', <200'	—	Index A + 4000 gal H ₂ O
		>200'	<5	
E	3	≥200'	≥5	Index A + 6000 gal H ₂ O

> Greater Than; < Less Than; ≥ Equal or Greater Than; ≤ Equal or Less Than; H₂O—Water; DC—Dry Chemical.

NOTE: The listing of ARFF index does not necessarily assure coverage for non-air carrier operations or at other than prescribed times for air carrier. ARFF Index Ltd.—indicates ARFF coverage may or may not be available, for information contact airport manager prior to flight.

16 NOTAM SERVICE

All public use landing areas are provided NOTAM service. A NOTAM FILE identifier is shown for individual landing areas, e.g., "NOTAM FILE BNA". See the AIM, Basic Flight Information and ATC Procedures for a detailed description of NOTAMS. Current NOTAMS are available from flight service stations at 1-800-WX-BRIEF (992-7433) or online through the FAA PilotWeb at <https://pilotweb.nas.faa.gov>. Military NOTAMS are available using the Defense Internet NOTAM Service (DINS) at <https://www.notams.faa.gov>. Pilots flying to or from airports not available through the FAA PilotWeb or DINS can obtain assistance from Flight Service.

17 FAA INSPECTION

All airports not inspected by FAA will be identified by the note: Not insp. This indicates that the airport information has been provided by the owner or operator of the field.

18 RUNWAY DATA

Runway information is shown on two lines. That information common to the entire runway is shown on the first line while information concerning the runway ends is shown on the second or following line. Runway direction, surface, length, width, weight bearing capacity, lighting, and slope, when available are shown for each runway. Multiple runways are shown with the longest runway first. Direction, length, width, and lighting are shown for sea-lanes. The full dimensions of helipads are shown, e.g., 50X150. Runway data that requires clarification will be placed in the remarks section.

RUNWAY DESIGNATION

Runways are normally numbered in relation to their magnetic orientation rounded off to the nearest 10 degrees. Parallel runways can be designated L (left)/R (right)/C (center). Runways may be designated as Ultralight or assault strips. Assault strips are shown by magnetic bearing.

RUNWAY DIMENSIONS

Runway length and width are shown in feet. Length shown is runway end to end including displaced thresholds, but excluding those areas designed as overruns.

RUNWAY SURFACE AND SURFACE TREATMENT

Runway lengths prefixed by the letter "H" indicate that the runways are hard surfaced (concrete, asphalt, or part asphalt-concrete). If the runway length is not prefixed, the surface is sod, clay, etc. The runway surface composition is indicated in parentheses after runway length as follows:

(AFSC)—Aggregate friction seal coat	(GRVL)—Gravel, or cinders	(SAND)—Sand
(AM2)—Temporary metal planks coated with nonskid material	(MATS)—Pierced steel planking, landing mats, membranes	(TURF)—Turf
(ASPH)—Asphalt	(PEM)—Part concrete, part asphalt	(TRTD)—Treated
(CONC)—Concrete	(PFC)—Porous friction courses	(WC)—Wire combed
(DIRT)—Dirt	(PSP)—Pierced steel plank	
(GRVD)—Grooved	(RFSC)—Rubberized friction seal coat	

Legend 6. Airport/Facility Directory.

©ASA

AIRPORT/FACILITY DIRECTORY LEGEND

17

RUNWAY WEIGHT BEARING CAPACITY

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport pavements are capable of supporting limited operations with gross weights in excess of the published figures. Permissible operating weights, insofar as runway strengths are concerned, are a matter of agreement between the owner and user. When desiring to operate into any airport at weights in excess of those published in the publication, users should contact the airport management for permission. Runway strength figures are shown in thousand of pounds, with the last three figures being omitted. Add 000 to figure following S, D, 2S, 2T, AUW, SWL, etc., for gross weight capacity. A blank space following the letter designator is used to indicate the runway can sustain aircraft with this type landing gear, although definite runway weight bearing capacity figures are not available, e.g., S, D. Applicable codes for typical gear configurations with S=Single, D=Dual, T=Triple and Q=Quadruple:

CURRENT	NEW	NEW DESCRIPTION
S	S	Single wheel type landing gear (DC3), (C47), (F15), etc.
D	D	Dual wheel type landing gear (BE1900), (B737), (A319), etc.
T	D	Dual wheel type landing gear (P3, C9).
ST	2S	Two single wheels in tandem type landing gear (C130).
TRT	2T	Two triple wheels in tandem type landing gear (C17), etc.
DT	2D	Two dual wheels in tandem type landing gear (B707), etc.
TT	2D	Two dual wheels in tandem type landing gear (B757, KC135).
SBTT	2D/D1	Two dual wheels in tandem/dual wheel body gear type landing gear (KC10).
None	2D/2D1	Two dual wheels in tandem/two dual wheels in tandem body gear type landing gear (A340-600).
DDT	2D/2D2	Two dual wheels in tandem/two dual wheels in double tandem body gear type landing gear (B747, E4).
TTT	3D	Three dual wheels in tandem type landing gear (B777), etc.
TT	D2	Dual wheel gear two struts per side main gear type landing gear (B52).
TDT	C5	Complex dual wheel and quadruple wheel combination landing gear (C5).

AUW—All up weight. Maximum weight bearing capacity for any aircraft irrespective of landing gear configuration.

SWL—Single Wheel Loading. (This includes information submitted in terms of Equivalent Single Wheel Loading (ESWL) and Single Isolated Wheel Loading).

PSI—Pounds per square inch. PSI is the actual figure expressing maximum pounds per square inch runway will support, e.g., (SWL 000/PSI 535).

Omission of weight bearing capacity indicates information unknown.

The ACN/PCN System is the ICAO standard method of reporting pavement strength for pavements with bearing strengths greater than 12,500 pounds. The Pavement Classification Number (PCN) is established by an engineering assessment of the runway. The PCN is for use in conjunction with an Aircraft Classification Number (ACN). Consult the Aircraft Flight Manual, Flight Information Handbook, or other appropriate source for ACN tables or charts. Currently, ACN data may not be available for all aircraft. If an ACN table or chart is available, the ACN can be calculated by taking into account the aircraft weight, the pavement type, and the subgrade category. For runways that have been evaluated under the ACN/PCN system, the PCN will be shown as a five-part code (e.g. PCN 80 R/B/W/T). Details of the coded format are as follows:

NOTE: Prior permission from the airport controlling authority is required when the ACN of the aircraft exceeds the published PCN or aircraft tire pressure exceeds the published limits.

- (1) The PCN NUMBER—The reported PCN indicates that an aircraft with an ACN equal or less than the reported PCN can operate on the pavement subject to any limitation on the tire pressure.
- (2) The type of pavement:
R — Rigid
F — Flexible
- (3) The pavement subgrade category:
A — High
B — Medium
C — Low
D — Ultra-low
- (4) The maximum tire pressure authorized for the pavement:
W — Unlimited, no pressure limit
X — High, limited to 254 psi (1.75 MPa)
Y — Medium, limited to 181 psi (1.25MPa)
Z — Low, limited to 73 psi (0.50 MPa)
- (5) Pavement evaluation method:
T — Technical evaluation
U — By experience of aircraft using the pavement

RUNWAY LIGHTING

Lights are in operation sunset to sunrise. Lighting available by prior arrangement only or operating part of the night and/or pilot controlled lighting with specific operating hours are indicated under airport or military remarks. At USN/USMC facilities lights are available only during airport hours of operation. Since obstructions are usually lighted, obstruction lighting is not included in this code. Unlighted obstructions on or surrounding an airport will be noted in airport or military remarks. Runway lights nonstandard (NSTD) are systems for which the light fixtures are not FAA approved L-800 series: color, intensity, or spacing does not meet FAA standards. Nonstandard runway lights, VASI, or any other system not listed below will be shown in airport remarks or military

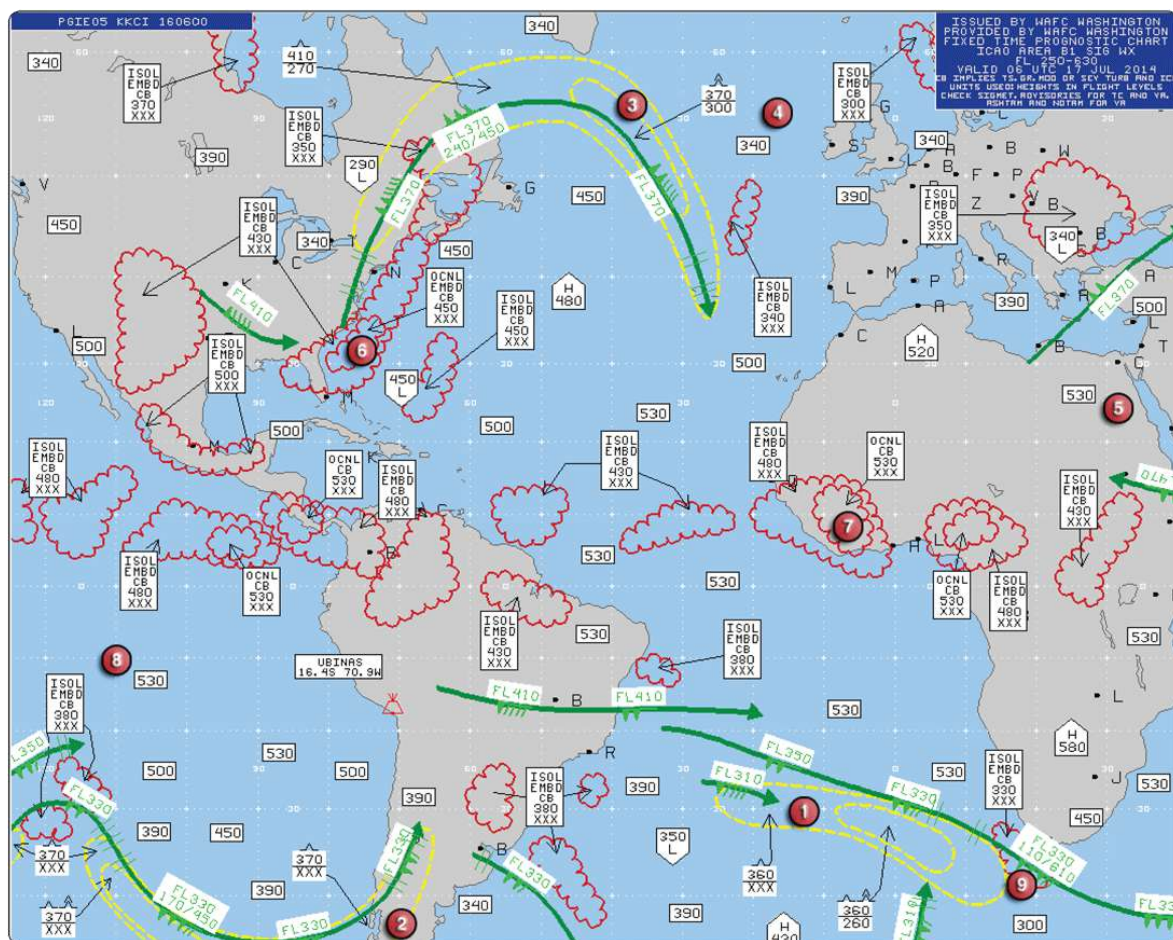


Figure 7. High-Level Significant Weather Prognostic Chart.

©ASA

18

AIRPORT/FACILITY DIRECTORY LEGEND

service. Temporary, emergency or limited runway edge lighting such as flares, smudge pots, lanterns or portable runway lights will also be shown in airport remarks or military service. Types of lighting are shown with the runway or runway end they serve.

NSTD—Light system fails to meet FAA standards.	SALS—Short Approach Lighting System.
LIRL—Low Intensity Runway Lights.	SALSF—Short Approach Lighting System with Sequenced Flashing Lights.
MIRL—Medium Intensity Runway Lights.	SSALS—Simplified Short Approach Lighting System.
HIRL—High Intensity Runway Lights.	SSALF—Simplified Short Approach Lighting System with Sequenced Flashing Lights.
RAIL—Runway Alignment Indicator Lights.	SSALR—Simplified Short Approach Lighting System with Runway Alignment Indicator Lights.
REIL—Runway End Identifier Lights.	ALSAF—High Intensity Approach Lighting System with Sequenced Flashing Lights.
CL—Centerline Lights.	ALSF1—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category I, Configuration.
TDZL—Touchdown Zone Lights.	ALSF2—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category II, Configuration.
ODALS—Omni Directional Approach Lighting System.	SF—Sequenced Flashing Lights.
AF OVRN—Air Force Overrun 1000' Standard Approach Lighting System.	OLS—Optical Landing System.
MALS—Medium Intensity Approach Lighting System.	WAVE—OFF.
MALSF—Medium Intensity Approach Lighting System with Sequenced Flashing Lights.	
MALSR—Medium Intensity Approach Lighting System with Runway Alignment Indicator Lights.	
RLLS—Runway Lead-in Light System	

NOTE: Civil ALSF2 may be operated as SSALR during favorable weather conditions. When runway edge lights are positioned more than 10 feet from the edge of the usable runway surface a remark will be added in the "Remarks" portion of the airport entry. This is applicable to Air Force, Air National Guard and Air Force Reserve Bases, and those joint use airfields on which they are tenants.

VISUAL GLIDESLOPE INDICATORS

APAP—A system of panels, which may or may not be lighted, used for alignment of approach path.	
PNIL APAP on left side of runway	PNIR APAP on right side of runway
PAPI—Precision Approach Path Indicator	
P2L 2-identical light units placed on left side of runway	P4L 4-identical light units placed on left side of runway
P2R 2-identical light units placed on right side of runway	P4R 4-identical light units placed on right side of runway
PVASI—Pulsating/steady burning visual approach slope indicator, normally a single light unit projecting two colors.	
PSIL PVASI on left side of runway	PSIR PVASI on right side of runway
SAVASI—Simplified Abbreviated Visual Approach Slope Indicator	
S2L 2-box SAVASI on left side of runway	S2R 2-box SAVASI on right side of runway
TRCV—Tri-color visual approach slope indicator, normally a single light unit projecting three colors.	
TRIL TRCV on left side of runway	TRIR TRCV on right side of runway
VASI—Visual Approach Slope Indicator	
V2L 2-box VASI on left side of runway	V6L 6-box VASI on left side of runway
V2R 2-box VASI on right side of runway	V6R 6-box VASI on right side of runway
V4L 4-box VASI on left side of runway	V12 12-box VASI on both sides of runway
V4R 4-box VASI on right side of runway	V16 16-box VASI on both sides of runway

NOTE: Approach slope angle and threshold crossing height will be shown when available; i.e., -GA 3.5° TCH 37'.

PILOT CONTROL OF AIRPORT LIGHTING

Key Mike	Function
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-Off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-Off)

Available systems will be indicated in the Service section, e.g., LGT ACTIVATE HIRL Rwy 07-25, MALSR Rwy 07, and VASI Rwy 07-122.8.

Where the airport is not served by an instrument approach procedure and/or has an independent type system of different specification installed by the airport sponsor, descriptions of the type lights, method of control, and operating frequency will be explained in clear text. See AIM, "Basic Flight Information and ATC Procedures," for detailed description of pilot control of airport lighting.

RUNWAY SLOPE

When available, runway slope data will be provided. Runway slope will be shown only when it is 0.3 percent or greater. On runways less than 8000 feet, the direction of the slope up will be indicated, e.g., 0.3% up NW. On runways 8000 feet or greater, the slope will be shown (up or down) on the runway end line, e.g., Rwy 13: 0.3% up., Rwy 31: Pole. Rgt ttc. 0.4% down.

AIRPORT/FACILITY DIRECTORY LEGEND

19

RUNWAY END DATA

Information pertaining to the runway approach end such as approach lights, touchdown zone lights, runway end identification lights, visual glideslope indicators, displaced thresholds, controlling obstruction, and right hand traffic pattern, will be shown on the specific runway end. "Rgt tfc"—Right traffic indicates right turns should be made on landing and takeoff for specified runway end. Runway Visual Range shall be shown as "RVR" appended with "T" for touchdown, "M" for midpoint, and "R" for rollout; e.g., RVR-TMR.

19 LAND AND HOLD—SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold—Short Operations" These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet. Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold—short operations and markings.

20 RUNWAY DECLARED DISTANCE INFORMATION

TORA—Take-off Run Available. The length of runway declared available and suitable for the ground run of an aeroplane take-off. TODA—Take-off Distance Available. The length of the take-off run available plus the length of the clearway, if provided. ASDA—Accelerate-Stop Distance Available. The length of the take-off run available plus the length of the stopway, if provided. LDA—Landing Distance Available. The length of runway which is declared available and suitable for the ground run of an aeroplane landing.

21 ARRESTING GEAR/SYSTEMS

Arresting gear is shown as it is located on the runway. The a-gear distance from the end of the appropriate runway (or into the overrun) is indicated in parentheses. A-Gear which has a bi-direction capability and can be utilized for emergency approach end engagement is indicated by a (B). Up to 15 minutes advance notice may be required for rigging A-Gear for approach and engagement. Airport listing may show availability of other than US Systems. This information is provided for emergency requirements only. Refer to current aircraft operating manuals for specific engagement weight and speed criteria based on aircraft structural restrictions and arresting system limitations.

Following is a list of current systems referenced in this publication identified by both Air Force and Navy terminology:

BI-DIRECTIONAL CABLE (B)

TYPE	DESCRIPTION
BAK-9	Rotary friction brake.
BAK-12A	Standard BAK-12 with 950 foot run out, 1-inch cable and 40,000 pound weight setting. Rotary friction brake.
BAK-12B	Extended BAK-12 with 1200 foot run, 1¼ inch Cable and 50,000 pounds weight setting. Rotary friction brake.
E28	Rotary Hydraulic (Water Brake).
M21	Rotary Hydraulic (Water Brake) Mobile.

The following device is used in conjunction with some aircraft arresting systems:

BAK-14	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to five seconds to fully raise the cable.)
H	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to one and one-half seconds to fully raise the cable.)

UNI-DIRECTIONAL CABLE

TYPE	DESCRIPTION
MB60	Textile brake—an emergency one-time use, modular braking system employing the tearing of specially woven textile straps to absorb the kinetic energy.
E5/E5-1/E5-3	Chain Type. At USN/USMC stations E-5 A-GEAR systems are rated, e.g., E-5 RATING-13R-1100 HW (DRY), 31L/R-1200 STD (WET). This rating is a function of the A-GEAR chain weight and length and is used to determine the maximum aircraft engaging speed. A dry rating applies to a stabilized surface (dry or wet) while a wet rating takes into account the amount (if any) of wet overrun that is not capable of withstanding the aircraft weight. These ratings are published under Service/Military/A-Gear in the entry.

FOREIGN CABLE

TYPE	DESCRIPTION	US EQUIVALENT
44B-3H	Rotary Hydraulic (Water Brake)	
CHAG	Chain	E-5

UNI-DIRECTIONAL BARRIER

TYPE	DESCRIPTION
MA-1A	Web barrier between stanchions attached to a chain energy absorber.
BAK-15	Web barrier between stanchions attached to an energy absorber (water squeezer, rotary friction, chain). Designed for wing engagement.

NOTE: Landing short of the runway threshold on a runway with a BAK-15 in the underrun is a significant hazard. The barrier in the down position still protrudes several inches above the underrun. Aircraft contact with the barrier short of the runway threshold can cause damage to the barrier and substantial damage to the aircraft.

OTHER

TYPE	DESCRIPTION
EMAS	Engineered Material Arresting System, located beyond the departure end of the runway, consisting of high energy absorbing materials which will crush under the weight of an aircraft.

Legend 9. Airport/Facility Directory.

©ASA

20

AIRPORT/FACILITY DIRECTORY LEGEND

22 SERVICE

SERVICING—CIVIL

- | | |
|--|--|
| S1: Minor airframe repairs. | S5: Major airframe repairs. |
| S2: Minor airframe and minor powerplant repairs. | S6: Minor airframe and major powerplant repairs. |
| S3: Major airframe and minor powerplant repairs. | S7: Major powerplant repairs. |
| S4: Major airframe and major powerplant repairs. | S8: Minor powerplant repairs. |

FUEL—CIVIL

CODE	FUEL	CODE	FUEL
80	Grade 80 gasoline (Red)	A1+	Jet A-1, Kerosene with FS-II*, FP** minus 47° C.
100	Grade 100 gasoline (Green)	B	Jet B, Wide-cut, turbine fuel without FS-II*, FP** minus 50° C.
100LL	100LL gasoline (low lead) (Blue)	B+	Jet B, Wide-cut, turbine fuel with FS-II*, FP** minus 50° C
115	Grade 115 gasoline (115/145 military specification) (Purple)	J4 (JP4)	(JP-4 military specification) FP** minus 58° C.
A	Jet A, Kerosene, without FS-II*, FP** minus 40° C.	J5 (JP5)	(JP-5 military specification) Kerosene with FS-II, FP** minus 46° C.
A+	Jet A, Kerosene, with FS-II*, FP** minus 40° C.	J8 (JP8)	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, Cl/LI#, SDA##, FP** minus 47° C.
A++	Jet A, Kerosene, with FS-II*, Cl/LI#, SDA##, FP** minus 40° C.	J8+100	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, Cl/LI#, SDA##, FP** minus 47° C, with +100 fuel additive that improves thermal stability characteristics of kerosene jet fuels.
A++100	Jet A, Kerosene, with FS-II*, Cl/LI#, SDA##, FP** minus 40° C, with +100 fuel additive that improves thermal stability characteristics of kerosene jet fuels.	J	(Jet Fuel Type Unknown)
A1	Jet A-1, Kerosene, without FS-II*, FP** minus 47° C.	MOGAS	Automobile gasoline which is to be used as aircraft fuel.

*(Fuel System Icing Inhibitor) ** (Freeze Point) # (Corrosion Inhibitors/Lubricity Improvers) ## (Static Dissipator Additive)

NOTE: Certain automobile gasoline may be used in specific aircraft engines if a FAA supplemental type certificate has been obtained. Automobile gasoline, which is to be used in aircraft engines, will be identified as "MOGAS", however, the grade/type and other octane rating will not be published.

Data shown on fuel availability represents the most recent information the publisher has been able to acquire. Because of a variety of factors, the fuel listed may not always be obtainable by transient civil pilots. Confirmation of availability of fuel should be made directly with fuel suppliers at locations where refueling is planned.

OXYGEN—CIVIL

- | | |
|--------------------|--|
| OX 1 High Pressure | OX 3 High Pressure—Replacement Bottles |
| OX 2 Low Pressure | OX 4 Low Pressure—Replacement Bottles |

SERVICE—MILITARY

Specific military services available at the airport are listed under this general heading. Remarks applicable to any military service are shown in the individual service listing.

JET AIRCRAFT STARTING UNITS (JASU)—MILITARY

The numeral preceding the type of unit indicates the number of units available. The absence of the numeral indicates ten or more units available. If the number of units is unknown, the number one will be shown. Absence of JASU designation indicates non-availability.

The following is a list of current JASU systems referenced in this publication:

USAF JASU (For variations in technical data, refer to T.O. 35-1-7.)

ELECTRICAL STARTING UNITS:

A/M32A-86	AC: 115/200v, 3 phase, 90 kva, 0.8 pf, 4 wire DC: 28v, 1500 amp, 72 kw (with TR pack)
MC-1A	AC: 115/208v, 400 cycle, 3 phase, 37.5 kva, 0.8 pf, 108 amp, 4 wire DC: 28v, 500 amp, 14 kw
MD-3	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3A	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3M	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 500 amp, 15 kw
MD-4	AC: 120/208v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 175 amp, "WYE" neutral ground, 4 wire, 120v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 303 amp, "DELTA" 3 wire, 120v, 400 cycle, 1 phase, 62.5 kva, 0.8 pf, 520 amp, 2 wire

AIRPORT/FACILITY DIRECTORY LEGEND

21

AIR STARTING UNITS

AM32-95	150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia
AM32A-95	150 +/- 5 lb/min @ 49 +/- 2 psia (35 +/- 2 psig)
LASS	150 +/- 5 lb/min @ 49 +/- 2 psia
MA-1A	82 lb/min (1123 cfm) at 130° air inlet temp, 45 psia (min) air outlet press
MC-1	15 cfm, 3500 psia
MC-1A	15 cfm, 3500 psia
MC-2A	15 cfm, 200 psia
MC-11	8,000 cu in cap, 4000 psig, 15 cfm

COMBINED AIR AND ELECTRICAL STARTING UNITS:

AGPU	AC: 115/200v, 400 cycle, 3 phase, 30 kw gen DC: 28v, 700 amp AIR: 60 lb/min @ 40 psig @ sea level
AM32A-60*	AIR: 120 +/- 4 lb/min (1644 +/- 55 cfm) at 49 +/- 2 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire, 120v, 1 phase, 25 kva DC: 28v, 500 amp, 15 kw
AM32A-60A	AIR: 150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw
AM32A-60B*	AIR: 130 lb/min, 50 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw

*NOTE: During combined air and electrical loads, the pneumatic circuitry takes preference and will limit the amount of electrical power available.

USN JASU

ELECTRICAL STARTING UNITS:

NC-8A/A1	DC: 500 amp constant, 750 amp intermittent, 28v; AC: 60 kva @ .8 pf, 115/200v, 3 phase, 400 Hz.
NC-10A/A1/B/C	DC: 750 amp constant, 1000 amp intermittent, 28v; AC: 90 kva, 115/200v, 3 phase, 400 Hz.

AIR STARTING UNITS:

GTC-85/GTE-85	120 lbs/min @ 45 psi.
MSU-200NAV/A/U47A-5	204 lbs/min @ 56 psia.
WELLS AIR START SYSTEM	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. Simultaneous multiple start capability.

COMBINED AIR AND ELECTRICAL STARTING UNITS:

NCPP-105/RCPT	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. 700 amp, 28v DC. 120/208v, 400 Hz AC, 30 kva.
---------------	---

ARMY JASU

59B2-1B	28v, 7.5 kw, 280 amp.
---------	-----------------------

OTHER JASU

ELECTRICAL STARTING UNITS (DND):

CE12	AC 115/200v, 140 kva, 400 Hz, 3 phase
CE13	AC 115/200v, 60 kva, 400 Hz, 3 phase
CE14	AC/DC 115/200v, 140 kva, 400 Hz, 3 phase, 28vDC, 1500 amp
CE15	DC 22-35v, 500 amp continuous 1100 amp intermittent
CE16	DC 22-35v, 500 amp continuous 1100 amp intermittent soft start

AIR STARTING UNITS (DND):

CA2	ASA 45.5 psig, 116.4 lb/min
-----	-----------------------------

COMBINED AIR AND ELECTRICAL STARTING UNITS (DND)

CEA1	AC 120/208v, 60 kva, 400 Hz, 3 phase DC 28v, 75 amp AIR 112.5 lb/min, 47 psig
------	--

ELECTRICAL STARTING UNITS (OTHER)

C-26	28v 45kw 115-200v 15kw 380-800 Hz 1 phase 2 wire
C-26-B, C-26-C	28v 45kw: Split Bus: 115-200v 15kw 380-800 Hz 1 phase 2 wire
E3	DC 28v/10kw

AIR STARTING UNITS (OTHER):

A4	40 psi/2 lb/sec (LPAS Mk12, Mk12L, Mk12A, Mk1, Mk2B)
MA-1	150 Air HP, 115 lb/min 50 psia
MA-2	250 Air HP, 150 lb/min 75 psia

CARTRIDGE:

MXU-4A	USAF
--------	------

Legend 11. Airport/Facility Directory.

©ASA

22

AIRPORT/FACILITY DIRECTORY LEGEND

FUEL—MILITARY

Fuel available through US Military Base supply, DESC Into-Plane Contracts and/or reciprocal agreement is listed first and is followed by (Mil). At commercial airports where Into-Plane contracts are in place, the name of the refueling agent is shown. Military fuel should be used first if it is available. When military fuel cannot be obtained but Into-Plane contract fuel is available, Government aircraft must refuel with the contract fuel and applicable refueling agent to avoid any breach in contract terms and conditions. Fuel not available through the above is shown preceded by NC (no contract). When fuel is obtained from NC sources, local purchase procedures must be followed. The US Military Aircraft Identaplates DD Form 1896 (Jet Fuel), DD Form 1897 (Avgas) and AF Form 1245 (Avgas) are used at military installations only. The US Government Aviation Into-Plane Reimbursement (AIR) Card (currently issued by AVCARD) is the instrument to be used to obtain fuel under a DESC Into-Plane Contract and for NC purchases if the refueling agent at the commercial airport accepts the AVCARD. A current list of contract fuel locations is available online at https://cis.energy.dla.mil/ip_cis/. See legend item 14 for fuel code and description.

SUPPORTING FLUIDS AND SYSTEMS—MILITARY

CODE

ADI Anti-Detonation Injection Fluid—Reciprocating Engine Aircraft.
W Water Thrust Augmentation—Jet Aircraft.
WAI Water-Alcohol Injection Type, Thrust Augmentation—Jet Aircraft.
SP Single Point Refueling.
PRESAIR Air Compressors rated 3,000 PSI or more.
De-Ice Anti-icing/De-icing/Defrosting Fluid (MIL-A-8243).

OXYGEN:

LPOX Low pressure oxygen servicing.
HPOX High pressure oxygen servicing.
LHOX Low and high pressure oxygen servicing.
LOX Liquid oxygen servicing.
OXRB Oxygen replacement bottles. (Maintained primarily at Naval stations for use in acft where oxygen can be replenished only by replacement of cylinders.)
OX Indicates oxygen servicing when type of servicing is unknown.
NOTE: Combinations of above items is used to indicate complete oxygen servicing available;
LHOXRB Low and high pressure oxygen servicing and replacement bottles;
LPOXRB Low pressure oxygen replacement bottles only, etc.

NOTE: Aircraft will be serviced with oxygen procured under military specifications only. Aircraft will not be serviced with medical oxygen.

NITROGEN:

LPNIT — Low pressure nitrogen servicing.
HPNIT — High pressure nitrogen servicing.
LHNIT — Low and high pressure nitrogen servicing.

OIL—MILITARY

US AVIATION OILS (MIL SPECS):

CODE	GRADE, TYPE
O-113	1065, Reciprocating Engine Oil (MIL-L-6082)
O-117	1100, Reciprocating Engine Oil (MIL-L-6082)
O-117+	1100, O-117 plus cyclohexanone (MIL-L-6082)
O-123	1065, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type III)
O-128	1100, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type II)
O-132	1005, Jet Engine Oil (MIL-L-6081)
O-133	1010, Jet Engine Oil (MIL-L-6081)
O-147	None, MIL-L-6085A Lubricating Oil, Instrument, Synthetic
O-148	None, MIL-L-7808 (Synthetic Base) Turbine Engine Oil
O-149	None, Aircraft Turbine Engine Synthetic, 7.5c St
O-155	None, MIL-L-6086C, Aircraft, Medium Grade
O-156	None, MIL-L-23699 (Synthetic Base), Turboprop and Turboshaft Engines
JOAP/SOAP	Joint Oil Analysis Program. JOAP support is furnished during normal duty hours, other times on request. (JOAP and SOAP programs provide essentially the same service, JOAP is now the standard joint service supported program.)

TRANSIENT ALERT (TRAN ALERT)—MILITARY

Tran Alert service is considered to include all services required for normal aircraft turn-around, e.g., servicing (fuel, oil, oxygen, etc.), debriefing to determine requirements for maintenance, minor maintenance, inspection and parking assistance of transient aircraft. Drag chute repack, specialized maintenance, or extensive repairs will be provided within the capabilities and priorities of the base. Delays can be anticipated after normal duty hours/holidays/weekends regardless of the hours of transient maintenance operation. Pilots should not expect aircraft to be serviced for TURN-AROUNDS during time periods when servicing or maintenance manpower is not available. In the case of airports not operated exclusively by US military, the servicing indicated by the remarks will not always be available for US military aircraft. When transient alert services are not shown, facilities are unknown. NO PRIORITY BASIS—means that transient alert services will be provided only after all the requirements for mission/tactical assigned aircraft have been accomplished.

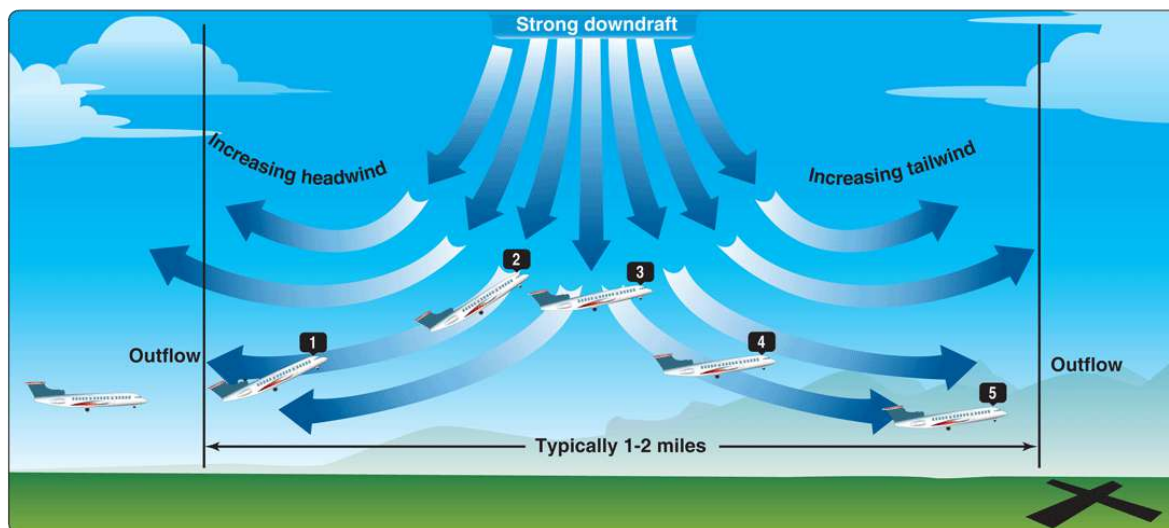


Figure 13. Microburst Section Chart.

©ASA

AIRPORT/FACILITY DIRECTORY LEGEND

23

23 AIRPORT REMARKS

The Attendance Schedule is the months, days and hours the airport is actually attended. Airport attendance does not mean watchman duties or telephone accessibility, but rather an attendant or operator on duty to provide at least minimum services (e.g., repairs, fuel, transportation).

Airport Remarks have been grouped in order of applicability. Airport remarks are limited to those items of information that are determined essential for operational use, i.e., conditions of a permanent or indefinite nature and conditions that will remain in effect for more than 30 days concerning aeronautical facilities, services, maintenance available, procedures or hazards, knowledge of which is essential for safe and efficient operation of aircraft. Information concerning permanent closing of a runway or taxiway will not be shown. A note "See Special Notices" shall be applied within this remarks section when a special notice applicable to the entry is contained in the Special Notices section of this publication.

Parachute Jumping indicates parachute jumping areas associated with the airport. See Parachute Jumping Area section of this publication for additional information.

Landing Fee indicates landing charges for private or non-revenue producing aircraft. In addition, fees may be charged for planes that remain over a couple of hours and buy no services, or at major airline terminals for all aircraft.

Note: Unless otherwise stated, remarks including runway ends refer to the runway's approach end.

24 MILITARY REMARKS

Joint Civil/Military airports contain both Airport Remarks and Military Remarks. Military Remarks published for these airports are applicable only to the military. Military and joint Military/Civil airports contain only Military Remarks. Remarks contained in this section may not be applicable to civil users. When both sets of remarks exist, the first set is applicable to the primary operator of the airport. Remarks applicable to a tenant on the airport are shown preceded by the tenant organization, i.e., (A) (AF) (N) (ANG), etc. Military airports operate 24 hours unless otherwise specified. Airport operating hours are listed first (airport operating hours will only be listed if they are different than the airport attended hours or if the attended hours are unavailable) followed by pertinent remarks in order of applicability. Remarks will include information on restrictions, hazards, traffic pattern, noise abatement, customs/agriculture/immigration, and miscellaneous information applicable to the Military.

Type of restrictions:

CLOSED: When designated closed, the airport is restricted from use by all aircraft unless stated otherwise. Any closure applying to specific type of aircraft or operation will be so stated. USN/USMC/USAF airports are considered closed during non-operating hours. Closed airports may be utilized during an emergency provided there is a safe landing area.

OFFICIAL BUSINESS ONLY: The airfield is closed to all transient military aircraft for obtaining routine services such as fueling, passenger drop off or pickup, practice approaches, parking, etc. The airfield may be used by aircrews and aircraft if official government business (including civilian) must be conducted on or near the airfield and prior permission is received from the airfield manager.

AF OFFICIAL BUSINESS ONLY OR NAVY OFFICIAL BUSINESS ONLY: Indicates that the restriction applies only to service indicated.

PRIOR PERMISSION REQUIRED (PPR): Airport is closed to transient aircraft unless approval for operation is obtained from the appropriate commander through Chief, Airfield Management or Airfield Operations Officer. Official Business or PPR does not preclude the use of US Military airports as an alternate for IFR flights. If a non-US military airport is used as a weather alternate and requires a PPR, the PPR must be requested and confirmed before the flight departs. The purpose of PPR is to control volume and flow of traffic rather than to prohibit it. Prior permission is required for all aircraft requiring transient alert service outside the published transient alert duty hours. All aircraft carrying hazardous materials must obtain prior permission as outlined in AFJI 11-204, AR 95-27, OPNAVINST 3710.7.

Note: OFFICIAL BUSINESS ONLY AND PPR restrictions are not applicable to Special Air Mission (SAM) or Special Air Resource (SPAR) aircraft providing person or persons on board are designated Code 6 or higher as explained in AFJMAN 11-213, AR 95-11, OPNAVINST 3722-8J. Official Business Only or PPR do not preclude the use of the airport as an alternate for IFR flights.

25 AIRPORT MANAGER

The phone number of the airport manager.

26 WEATHER DATA SOURCES

Weather data sources will be listed alphabetically followed by their assigned frequencies and/or telephone number and hours of operation.

ASOS—Automated Surface Observing System. Reports the same as an AWOS-3 plus precipitation identification and intensity, and freezing rain occurrence;

AWOS—Automated Weather Observing System

AWOS-A—reports altimeter setting (all other information is advisory only).

AWOS-AV—reports altimeter and visibility.

AWOS-1—reports altimeter setting, wind data and usually temperature, dew point and density altitude.

AWOS-2—reports the same as AWOS-1 plus visibility.

AWOS-3—reports the same as AWOS-1 plus visibility and cloud/ceiling data.

AWOS-3P reports the same as the AWOS-3 system, plus a precipitation identification sensor.

AWOS-3PT reports the same as the AWOS-3 system, plus precipitation identification sensor and a thunderstorm/lightning reporting capability.

24

AIRPORT/FACILITY DIRECTORY LEGEND

AWOS—3T reports the same as AWOS—3 system and includes a thunderstorm/lightning reporting capability.

See AIM, Basic Flight Information and ATC Procedures for detailed description of Weather Data Sources.

AWOS—4—reports same as AWOS—3 system, plus precipitation occurrence, type and accumulation, freezing rain, thunderstorm and runway surface sensors.

HIWAS—See RADIO AIDS TO NAVIGATION

LAWRS—Limited Aviation Weather Reporting Station where observers report cloud height, weather, obstructions to vision, temperature and dewpoint (in most cases), surface wind, altimeter and pertinent remarks.

LLWAS—indicates a Low Level Wind Shear Alert System consisting of a center field and several field perimeter anemometers.

SAWRS—identifies airports that have a Supplemental Aviation Weather Reporting Station available to pilots for current weather information.

SWSL—Supplemental Weather Service Location providing current local weather information via radio and telephone.

TDWR—indicates airports that have Terminal Doppler Weather Radar.

WSP—indicates airports that have Weather System Processor.

When the automated weather source is broadcast over an associated airport NAVAID frequency (see NAVAID line), it shall be indicated by a bold ASOS, AWOS, or HIWAS followed by the frequency, identifier and phone number, if available.

27 COMMUNICATIONS

Airport terminal control facilities and radio communications associated with the airport shall be shown. When the call sign is not the same as the airport name the call sign will be shown. Frequencies shall normally be shown in descending order with the primary frequency listed first. Frequencies will be listed, together with sectorization indicated by outbound radials, and hours of operation. Communications will be listed in sequence as follows:

Single Frequency Approach (SFA), Common Traffic Advisory Frequency (CTAF), Aeronautical Advisory Stations (UNICOM) or (AUNICOM), and Automatic Terminal Information Service (ATIS) along with their frequency is shown, where available, on the line following the heading "COMMUNICATIONS." When the CTAF and UNICOM frequencies are the same, the frequency will be shown as CTAF/UNICOM 122.8.

The FSS telephone nationwide is toll free 1-800-WX-BRIEF (1-800-992-7433). When the FSS is located on the field it will be indicated as "on arpt". Frequencies available at the FSS will follow in descending order. Remote Communications Outlet (RCO) providing service to the airport followed by the frequency and FSS RADIO name will be shown when available. FSS's provide information on airport conditions, radio aids and other facilities, and process flight plans. Airport Advisory Service (AAS) is provided on the CTAF by FSS's for select non-tower airports or airports where the tower is not in operation.

(See AIM, Para 4-1-9 Traffic Advisory Practices at Airports Without Operating Control Towers or AC 90-42C.)

Aviation weather briefing service is provided by FSS specialists. Flight and weather briefing services are also available by calling the telephone numbers listed.

Remote Communications Outlet (RCO)—An unmanned air/ground communications facility that is remotely controlled and provides UHF or VHF communications capability to extend the service range of an FSS.

Civil Communications Frequencies—Civil communications frequencies used in the FSS air/ground system are operated on 122.0, 122.2, 123.6; emergency 121.5; plus receive-only on 122.1.

- 122.0 is assigned as the Enroute Flight Advisory Service frequency at selected FSS RADIO outlets.
- 122.2 is assigned as a common enroute frequency.
- 123.6 is assigned as the airport advisory frequency at select non-tower locations. At airports with a tower, FSS may provide airport advisories on the tower frequency when tower is closed.
- 122.1 is the primary receive-only frequency at VOR's.
- Some FSS's are assigned 50 kHz frequencies in the 122-126 MHz band (eg. 122.45). Pilots using the FSS A/G system should refer to this directory or appropriate charts to determine frequencies available at the FSS or remotest facility through which they wish to communicate.

Emergency frequency 121.5 and 243.0 are available at all Flight Service Stations, most Towers, Approach Control and RADAR facilities.

Frequencies published followed by the letter "T" or "R", indicate that the facility will only transmit or receive respectively on that frequency. All radio aids to navigation (NAVAID) frequencies are transmit only.

TERMINAL SERVICES

SFA—Single Frequency Approach.

CTAF—A program designed to get all vehicles and aircraft at airports without an operating control tower on a common frequency.

ATIS—A continuous broadcast of recorded non-control information in selected terminal areas.

D-ATIS—Digital ATIS provides ATIS information in text form outside the standard reception range of conventional ATIS via landline & data link communications and voice message within range of existing transmitters.

AUNICOM—Automated UNICOM is a computerized, command response system that provides automated weather, radio check capability and airport advisory information selected from an automated menu by microphone clicks.

UNICOM—A non-government air/ground radio communications facility which may provide airport information.

PTD—Pilot to Dispatcher.

APP CON—Approach Control. The symbol ® indicates radar approach control.

TOWER—Control tower.

GCA—Ground Control Approach System.

GND CON—Ground Control.

AIRPORT/FACILITY DIRECTORY LEGEND

25

GCO—Ground Communication Outlet—An unstaffed, remotely controlled, ground/ground communications facility. Pilots at uncontrolled airports may contact ATC and FSS via VHF to a telephone connection to obtain an instrument clearance or close a VFR or IFR flight plan. They may also get an updated weather briefing prior to takeoff. Pilots will use four “key clicks” on the VHF radio to contact the appropriate ATC facility or six “key clicks” to contact the FSS. The GCO system is intended to be used only on the ground.

DEP CON—Departure Control. The symbol  indicates radar departure control.

CLNC DEL—Clearance Delivery.

CPDLC—Controller Pilot Data Link Communication. FANS ATC data communication capability from the aircraft to the ATC Data Link system.

PRE TAXI CLNC—Pre taxi clearance.

VFR ADVSY SVC—VFR Advisory Service. Service provided by Non-Radar Approach Control.
Advisory Service for VFR aircraft (upon a workload basis) ctc APP CON.

COMD POST—Command Post followed by the operator call sign in parenthesis.

PMSV—Pilot-to-Metro Service call sign, frequency and hours of operation, when full service is other than continuous. PMSV installations at which weather observation service is available shall be indicated, following the frequency and/or hours of operation as “Wx obsn svc 1900-0000Z+” or “other times” may be used when no specific time is given. PMSV facilities manned by forecasters are considered “Full Service”. PMSV facilities manned by weather observers are listed as “Limited Service”.

OPS—Operations followed by the operator call sign in parenthesis.

CON

RANGE

FLT FLW—Flight Following

MEDIVAC

NOTE: Communication frequencies followed by the letter “X” indicate frequency available on request.

AIRSPACE

Information concerning Class B, C, and part-time D and E surface area airspace shall be published with effective times, if available.

CLASS B—Radar Sequencing and Separation Service for all aircraft in CLASS B airspace.

CLASS C—Separation between IFR and VFR aircraft and sequencing of VFR arrivals to the primary airport.

TRSA—Radar Sequencing and Separation Service for participating VFR Aircraft within a Terminal Radar Service Area.

Class C, D, and E airspace described in this publication is that airspace usually consisting of a 5 NM radius core surface area that begins at the surface and extends upward to an altitude above the airport elevation (charted in MSL for Class C and Class D).

Class E surface airspace normally extends from the surface up to but not including the overlying controlled airspace.

When part-time Class C or Class D airspace defaults to Class E, the core surface area becomes Class E. This will be formatted as:

AIRSPACE: CLASS C svc “times” ctc **APP CON** other times CLASS E:

or

AIRSPACE: CLASS D svc “times” other times CLASS E.

When a part-time Class C, Class D or Class E surface area defaults to Class G, the core surface area becomes Class G up to, but not including, the overlying controlled airspace. Normally, the overlying controlled airspace is Class E airspace beginning at either 700’ or 1200’ AGL and may be determined by consulting the relevant VFR Sectional or Terminal Area Charts. This will be formatted as:

AIRSPACE: CLASS C svc “times” ctc **APP CON** other times CLASS G, with CLASS E 700’ (or 1200’) AGL & abv:

or

AIRSPACE: CLASS D svc “times” other times CLASS G with CLASS E 700’ (or 1200’) AGL & abv:

or

AIRSPACE: CLASS E svc “times” other times CLASS G with CLASS E 700’ (or 1200’) AGL & abv.

NOTE: AIRSPACE SVC “TIMES” INCLUDE ALL ASSOCIATED ARRIVAL EXTENSIONS. Surface area arrival extensions for instrument approach procedures become part of the primary core surface area. These extensions may be either Class D or Class E airspace and are effective concurrent with the times of the primary core surface area. For example, when a part-time Class C, Class D or Class E surface area defaults to Class G, the associated arrival extensions will default to Class G at the same time. When a part-time Class C or Class D surface area defaults to Class E, the arrival extensions will remain in effect as Class E airspace.

NOTE: CLASS E AIRSPACE EXTENDING UPWARD FROM 700 FEET OR MORE ABOVE THE SURFACE, DESIGNATED IN CONJUNCTION WITH AN AIRPORT WITH AN APPROVED INSTRUMENT PROCEDURE.

Class E 700’ AGL (shown as magenta vignette on sectional charts) and 1200’ AGL (blue vignette) areas are designated when necessary to provide controlled airspace for transitioning to/from the terminal and enroute environments. Unless otherwise specified, these 700’/1200’ AGL Class E airspace areas remain in effect continuously, regardless of airport operating hours or surface area status. These transition areas should not be confused with surface areas or arrival extensions.

(See Chapter 3, AIRSPACE, in the Aeronautical Information Manual for further details)

26

AIRPORT/FACILITY DIRECTORY LEGEND


29 VOR TEST FACILITY (VOT)

The VOT transmits a signal which provided users a convenient means to determine the operational status and accuracy of an aircraft VOR receiver while on the ground. Ground based VOTs and the associated frequency shall be shown when available. VOTs are also shown with identifier, frequency and referenced remarks in the VOR Receiver Check section in the back of this publication.

30 RADIO AIDS TO NAVIGATION

The Airport/Facility Directory section of the Chart Supplement lists, by facility name, all Radio Aids to Navigation that appear on FAA, Aeronautical Information Services Visual or IFR Aeronautical Charts and those upon which the FAA has approved an Instrument Approach Procedure, with exception of selected TACANs. All VOR, VORTAC, TACAN and ILS equipment in the National Airspace System has an automatic monitoring and shutdown feature in the event of malfunction. Unmonitored, as used in this publication, for any navigational aid, means that monitoring personnel cannot observe the malfunction or shutdown signal. The NAVAID NOTAM file identifier will be shown as "NOTAM FILE IAD" and will be listed on the Radio Aids to Navigation line. When two or more NAVAIDS are listed and the NOTAM file identifier is different from that shown on the Radio Aids to Navigation line, it will be shown with the NAVAID listing. NOTAM file identifiers for ILSs and its components (e.g., NDB (LOM) are the same as the associated airports and are not repeated. Automated Surface Observing System (ASOS), Automated Weather Observing System (AWOS), and Hazardous Inflight Weather Advisory Service (HIWAS) will be shown when this service is broadcast over selected NAVAIDS.

NAVAID information is tabulated as indicated in the following sample:

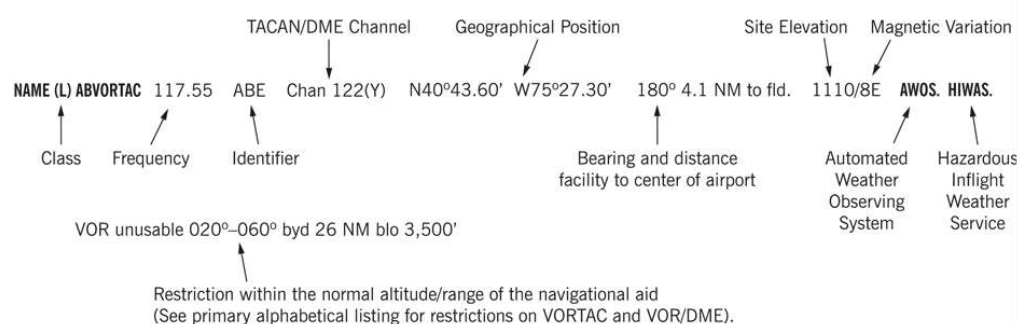

Note: Those DME channel numbers with a (Y) suffix require TACAN to be placed in the "Y" mode to receive distance information.

HIWAS—Hazardous Inflight Weather Advisory Service is a continuous broadcast of inflight weather advisories including summarized SIGMETs, convective SIGMETs, AIRMETs and urgent PIREPs. HIWAS is presently broadcast over selected VOR's throughout the U.S.

ASR/PAR—Indicates that Surveillance (ASR) or Precision (PAR) radar instrument approach minimums are published in the U.S. Terminal Procedures. Only part-time hours of operation will be shown.

AIRPORT/FACILITY DIRECTORY LEGEND

27

RADIO CLASS DESIGNATIONS

VOR/DME/TACAN Standard Service Volume (SSV) Classifications

SSV Class	Altitudes	Distance (NM)
(T) Terminal	1000' to 12,000'	25
(L) Low Altitude	1000' to 18,000'	40
(H) High Altitude	1000' to 14,500'	40
	14,500' to 18,000'	100
	18,000' to 45,000'	130
	45,000' to 60,000'	100

NOTE: Additionally, (H) facilities provide (L) and (T) service volume and (L) facilities provide (T) service. Altitudes are with respect to the station's site elevation. Coverage is not available in a cone of airspace directly above the facility.

The term VOR is, operationally, a general term covering the VHF omnidirectional bearing type of facility without regard to the fact that the power, the frequency protected service volume, the equipment configuration, and operational requirements may vary between facilities at different locations.

AB _____	Automatic Weather Broadcast.
DF _____	Direction Finding Service.
DME _____	UHF standard (TACAN compatible) distance measuring equipment.
DME(Y) _____	UHF standard (TACAN compatible) distance measuring equipment that require TACAN to be placed in the "Y" mode to receive DME.
GS _____	Glide slope.
H _____	Non-directional radio beacon (homing), power 50 watts to less than 2,000 watts (50 NM at all altitudes).
HH _____	Non-directional radio beacon (homing), power 2,000 watts or more (75 NM at all altitudes).
H-SAB _____	Non-directional radio beacons providing automatic transcribed weather service.
ILS _____	Instrument Landing System (voice, where available, on localizer channel).
IM _____	Inner marker.
LDA _____	Localizer Directional Aid.
LMM _____	Compass locator station when installed at middle marker site (15 NM at all altitudes).
LOM _____	Compass locator station when installed at outer marker site (15 NM at all altitudes).
MH _____	Non-directional radio beacon (homing) power less than 50 watts (25 NM at all altitudes).
MM _____	Middle marker.
OM _____	Outer marker.
S _____	Simultaneous range homing signal and/or voice.
SABH _____	Non-directional radio beacon not authorized for IFR or ATC. Provides automatic weather broadcasts.
SDF _____	Simplified Direction Facility.
TACAN _____	UHF navigational facility-omnidirectional course and distance information.
VOR _____	VHF navigational facility-omnidirectional course only.
VOR/DME _____	Collocated VOR navigational facility and UHF standard distance measuring equipment.
VORTAC _____	Collocated VOR and TACAN navigational facilities.
W _____	Without voice on radio facility frequency.
Z _____	VHF station location marker at a LF radio facility.

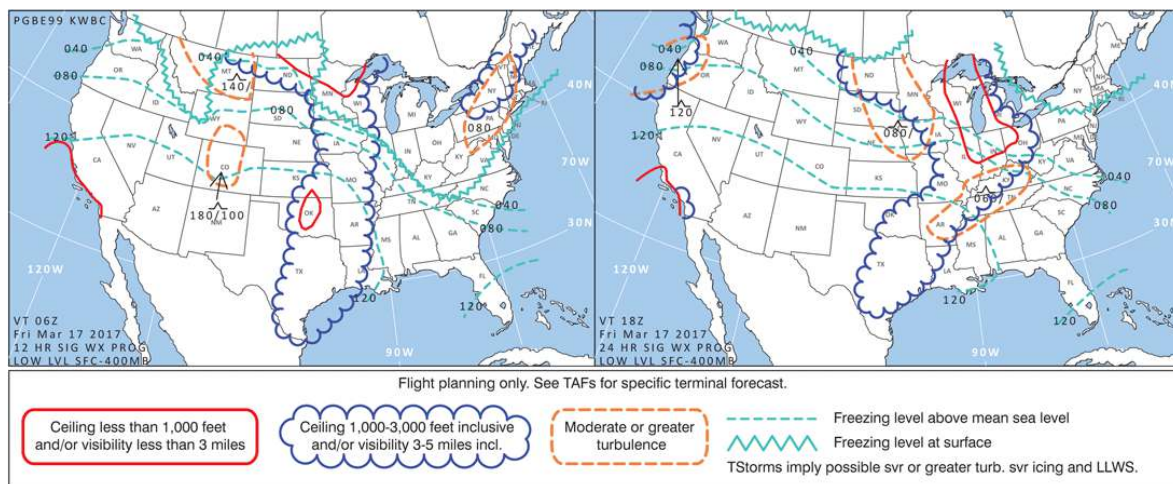


Figure 18. U.S. Low-Level Significant Weather Prognostic Charts.

©ASA

28

AIRPORT/FACILITY DIRECTORY LEGEND

ILS FACILITY PERFORMANCE CLASSIFICATION CODES

Codes define the ability of an ILS to support autoland operations. The two portions of the code represent Official Category and farthest point along a Category I, II, or III approach that the Localizer meets Category III structure tolerances.

Official Category: I, II, or III; the lowest minima on published or unpublished procedures supported by the ILS.

Farthest point of satisfactory Category III Localizer performance for Category I, II, or III approaches: A – 4 NM prior to runway threshold, B – 3500 ft prior to runway threshold, C – glide angle dependent but generally 750–1000 ft prior to threshold, T – runway threshold, D – 3000 ft after runway threshold, and E – 2000 ft prior to stop end of runway.

ILS information is tabulated as indicated in the following sample:

ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.

ILS Facility Performance
Classification Code

FREQUENCY PAIRING TABLE

VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL
108.10	18X	108.55	22Y	111.05	47Y	114.85	95Y
108.30	20X	108.65	23Y	111.15	48Y	114.95	96Y
108.50	22X	108.75	24Y	111.25	49Y	115.05	97Y
108.70	24X	108.85	25Y	111.35	50Y	115.15	98Y
108.90	26X	108.95	26Y	111.45	51Y	115.25	99Y
109.10	28X	109.05	27Y	111.55	52Y	115.35	100Y
109.30	30X	109.15	28Y	111.65	53Y	115.45	101Y
109.50	32X	109.25	29Y	111.75	54Y	115.55	102Y
109.70	34X	109.35	30Y	111.85	55Y	115.65	103Y
109.90	36X	109.45	31Y	111.95	56Y	115.75	104Y
110.10	38X	109.55	32Y	113.35	80Y	115.85	105Y
110.30	40X	109.65	33Y	113.45	81Y	115.95	106Y
110.50	42X	109.75	34Y	113.55	82Y	116.05	107Y
110.70	44X	109.85	35Y	113.65	83Y	116.15	108Y
110.90	46X	109.95	36Y	113.75	84Y	116.25	109Y
111.10	48X	110.05	37Y	113.85	85Y	116.35	110Y
111.30	50X	110.15	38Y	113.95	86Y	116.45	111Y
111.50	52X	110.25	39Y	114.05	87Y	116.55	112Y
111.70	54X	110.35	40Y	114.15	88Y	116.65	113Y
111.90	56X	110.45	41Y	114.25	89Y	116.75	114Y
108.05	17Y	110.55	42Y	114.35	90Y	116.85	115Y
108.15	18Y	110.65	43Y	114.45	91Y	116.95	116Y
108.25	19Y	110.75	44Y	114.55	92Y	117.05	117Y
108.35	20Y	110.85	45Y	114.65	93Y	117.15	118Y
108.45	21Y	110.95	46Y	114.75	94Y	117.25	119Y

FREQUENCY PAIRING TABLE

The following is a list of paired VOR/ILS VHF frequencies with TACAN channels.

TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY
2X	134.5	25X	108.80	36X	109.90	47X	111.00
2Y	134.55	25Y	108.85	36Y	109.95	47Y	111.05
11X	135.4	26X	108.90	37X	110.00	48X	111.10
11Y	135.45	26Y	108.95	37Y	110.05	48Y	111.15
12X	135.5	27X	109.00	38X	110.10	49X	111.20
12Y	135.55	27Y	109.05	38Y	110.15	49Y	111.25
17X	108.00	28X	109.10	39X	110.20	50X	111.30
17Y	108.05	28Y	109.15	39Y	110.25	50Y	111.35
18X	108.10	29X	109.20	40X	110.30	51X	111.40
18Y	108.15	29Y	109.25	40Y	110.35	51Y	111.45
19X	108.20	30X	109.30	41X	110.40	52X	111.50
19Y	108.25	30Y	109.35	41Y	110.45	52Y	111.55
20X	108.30	31X	109.40	42X	110.50	53X	111.60
20Y	108.35	31Y	109.45	42Y	110.55	53Y	111.65
21X	108.40	32X	109.50	43X	110.60	54X	111.70
21Y	108.45	32Y	109.55	43Y	110.65	54Y	111.75
22X	108.50	33X	109.60	44X	110.70	55X	111.80
22Y	108.55	33Y	109.65	44Y	110.75	55Y	111.85
23X	108.60	34X	109.70	45X	110.80	56X	111.90
23Y	108.65	34Y	109.75	45Y	110.85	56Y	111.95
24X	108.70	35X	109.80	46X	110.90	57X	112.00
24Y	108.75	35Y	109.85	46Y	110.95	57Y	112.05

Legend 18. Airport/Facility Directory.

©ASA

AIRPORT/FACILITY DIRECTORY LEGEND

29

TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY
58X	112.10	77X	113.00	96X	114.90	115X	116.80
58Y	112.15	77Y	113.05	96Y	114.95	115Y	116.85
59X	112.20	78X	113.10	97X	115.00	116X	116.90
59Y	112.25	78Y	113.15	97Y	115.05	116Y	116.95
60X	133.30	79X	113.20	98X	115.10	117X	117.00
60Y	133.35	79Y	113.25	98Y	115.15	117Y	117.05
61X	133.40	80X	113.30	99X	115.20	118X	117.10
61Y	133.45	80Y	113.35	99Y	115.25	118Y	117.15
62X	133.50	81X	113.40	100X	115.30	119X	117.20
62Y	133.55	81Y	113.45	100Y	115.35	119Y	117.25
63X	133.60	82X	113.50	101X	115.40	120X	117.30
63Y	133.65	82Y	113.55	101Y	115.45	120Y	117.35
64X	133.70	83X	113.60	102X	115.50	121X	117.40
64Y	133.75	83Y	113.65	102Y	115.55	121Y	117.45
65X	133.80	84X	113.70	103X	115.60	122X	117.50
65Y	133.85	84Y	113.75	103Y	115.65	122Y	117.55
66X	133.90	85X	113.80	104X	115.70	123X	117.60
66Y	133.95	85Y	113.85	104Y	115.75	123Y	117.65
67X	134.00	86X	113.90	105X	115.80	124X	117.70
67Y	134.05	86Y	113.95	105Y	115.85	124Y	117.75
68X	134.10	87X	114.00	106X	115.90	125X	117.80
68Y	134.15	87Y	114.05	106Y	115.95	125Y	117.85
69X	134.20	88X	114.10	107X	116.00	126X	117.90
69Y	134.25	88Y	114.15	107Y	116.05	126Y	117.95
70X	112.30	89X	114.20	108X	116.10		
70Y	112.35	89Y	114.25	108Y	116.15		
71X	112.40	90X	114.30	109X	116.20		
71Y	112.45	90Y	114.35	109Y	116.25		
72X	112.50	91X	114.40	110X	116.30		
72Y	112.55	91Y	114.45	110Y	116.35		
73X	112.60	92X	114.50	111X	116.40		
73Y	112.65	92Y	114.55	111Y	116.45		
74X	112.70	93X	114.60	112X	116.50		
74Y	112.75	93Y	114.65	112Y	116.55		
75X	112.80	94X	114.70	113X	116.60		
75Y	112.85	94Y	114.75	113Y	116.65		
76X	112.90	95X	114.80	114X	116.70		
76Y	112.95	95Y	114.85	114Y	116.75		

(31) **COMM/NAV/WEATHER REMARKS:** These remarks consist of pertinent information affecting the current status of communications, NAVAIDs and weather.

Legend 19. Airport/Facility Directory.

©ASA

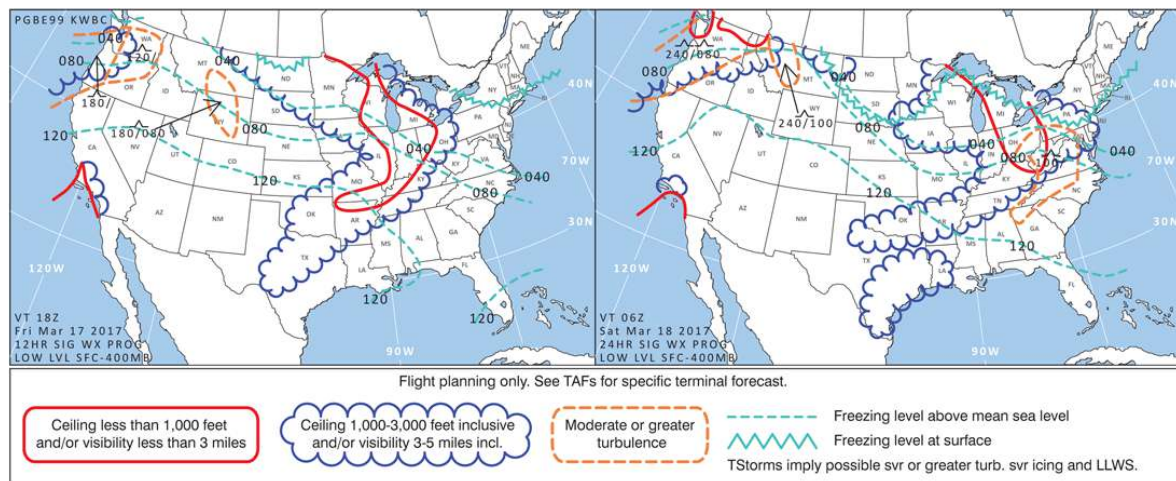


Figure 19. U.S. Low-Level Significant Weather Prognostic Charts.

©ASA

12320

TERMS/LANDING MINIMA DATA

IFR LANDING MINIMA

The United States Standard for Terminal Instrument Procedures (TERPS) is the approved criteria for formulating instrument approach procedures. Landing minima are established for six aircraft approach categories (ABCDE and COPTER). In the absence of COPTER MINIMA, helicopters may use the CAT A minimums of other procedures.

LANDING MINIMA FORMAT

In this example airport elevation is 1179, and runway touchdown zone elevation is 1152.

CATEGORY	A	B	C	D
S-ILS 27	1352/24		200 (200-½)	
S-LOC 27	1440/24	288	(300-½)	1440/50 288 (300-1)
CIRCLING	1540-1 361 (400-1)	1640-1 461 (500-1)	1640-1½ 461 (500-1½)	1740-2 561 (600-2)

DA: Decision Altitude
Viscosity (RVR 100's of feet)
Aircraft Approach Category
HAT/HATh
MDA: Minimum Descent Altitude
HAA: Height Above Airfield
Viscosity in Statute Miles

Straight-in ILS to Runway 27
Straight-in with Glide Slope Inoperative or not used to Runway 27

All weather minimums in parentheses not applicable to Civil Pilots. Military Pilots refer to appropriate regulations.

COPTER MINIMA ONLY

CATEGORY	COPTER
H-176°	680-½ 363 (400-½)

Copter Approach Direction
Height of MDA/DA Above Landing Area (HAL)
No circling minimums are provided

RNAV (GPS) MINIMA EXAMPLE

CATEGORY	A	B	C	D
LPV DA	1540/24	258 (300-½)		
LNAV/VNAV DA	1600/24	318 (400-½)		1600/40 318 (400-¾)
LNAV MDA	1840/24 558 (600-½)		1840/50 558 (600-1)	1840/60 558 (600-1 ¼)
CIRCLING	1840-1 545 (600-1)		1840-1½ 545 (600-1½)	1860-2 565 (600-2)

NOTE: The **W** symbol indicates outages of the WAAS vertical guidance may occur daily at this location due to initial system limitations. WAAS NOTAMS for vertical outages are not provided for this approach. Use LNAV minima for flight planning at these locations, whether as a destination or alternate. For flight operations at these locations, when the WAAS avionics indicate that LNAV/VNAV or LPV service is available, then vertical guidance may be used to complete the approach using the displayed level of service. Should an outage occur during the procedure, reversion to LNAV minima may be required. As the WAAS coverage is expanded, the **W** will be removed.

RNAV minimums are dependent on navigation equipment capability, as stated in the applicable AFM, AFMS, or other FAA approved document. See AIM paragraph 5-4-5, AC 90-105 and AC 90-107 for detailed requirements for each line of minima.

AIRCRAFT APPROACH CATEGORIES

Aircraft approach category indicates a grouping of aircraft based on a speed of VREF, if specified, or if VREF not specified, 1.3 VSO at the maximum certificated landing weight. VREF, VSO, and the maximum certificated landing weight are those values as established for the aircraft by the certification authority of the country of registry. Helicopters are Category A aircraft. An aircraft shall fit in only one category. However, if it is necessary to operate at a speed in excess of the upper limit of the speed range for an aircraft's category, the minimums for the category for that speed shall be used. For example, an airplane which fits into Category B, but is circling to land at a speed of 145 knots, shall use the approach Category D minimums. As an additional example, a Category A airplane (or helicopter) which is operating at 130 knots on a straight-in approach shall use the approach Category C minimums. See following category limits:

MANEUVERING TABLE

Approach Category	A	B	C	D	E
Speed (Knots)	0-90	91-120	121-140	141-165	Abv 165

TERMS/LANDING MINIMA DATA

Legend 20. Instrument Approach Procedures Explanation of Terms.

©ASA



13122

TERMS/LANDING MINIMA DATA

CIRCLING APPROACH OBSTACLE PROTECTED AIRSPACE

The circling MDA provides vertical clearance from obstacles when conducting a circle-to-land maneuver within the obstacle protected area. Circling approach obstacle protected areas extend laterally and longitudinally from the centerlines and ends of all runways at an airport by the distances shown in the following tables. The areas are technically defined by the tangential connection of arcs drawn at the radius distance shown from each runway end.

STANDARD CIRCLING APPROACH MANEUVERING RADIUS

Circling approach protected areas developed prior to late 2012 used the radius distances shown in the following table, expressed in nautical miles (NM), dependent on aircraft approach category. The approaches using standard circling approach areas can be identified by the absence of the **C** symbol on the circling line of minima.

Circling MDA in feet MSL	Approach Category and Circling Radius (NM)				
	CAT A	CAT B	CAT C	CAT D	CAT E
All Altitudes	1.3	1.5	1.7	2.3	4.5

C EXPANDED CIRCLING APPROACH MANEUVERING AIRSPACE RADIUS

Circling approach protected areas developed after late 2012 use the radius distance shown in the following table, expressed in nautical miles (NM), dependent on aircraft approach category, and the altitude of the circling MDA, which accounts for true airspeed increase with altitude. The approaches using expanded circling approach areas can be identified by the presence of the **C** symbol on the circling line of minima.

Circling MDA in feet MSL	Approach Category and Circling Radius (NM)				
	CAT A	CAT B	CAT C	CAT D	CAT E
1000 or less	1.3	1.7	2.7	3.6	4.5
1001-3000	1.3	1.8	2.8	3.7	4.6
3001-5000	1.3	1.8	2.9	3.8	4.8
5001-7000	1.3	1.9	3.0	4.0	5.0
7001-9000	1.4	2.0	3.2	4.2	5.3
9001 and above	1.4	2.1	3.3	4.4	5.5

Comparable Values of RVR and Visibility

The following table shall be used for converting RVR to ground or flight visibility. For converting RVR values that fall between listed values, use the next higher RVR value; do not interpolate. For example, when converting 1800 RVR, use 2400 RVR with the resultant visibility of ½ mile.

RVR (feet)	Visibility (statute miles)	RVR (feet)	Visibility (statute miles)
1600	¼	4500	¾
2400	½	5000	1
3200	⅝	6000	1¼
4000	¾		

RADAR MINIMA

	RWY	GS/TCH/RPI	CAT	DA/ MDA-VIS	HAT/ HAA	CEIL-VIS	CAT	DA/ MDA-VIS	HAT/ HAA	CEIL-VIS
PAR	10	2.5°/42/1000	ABCDE	195/16	100	(100-¼)				
	28	2.5°/48/1068	ABCDE	187/16	100	(100-¼)				
ASR	10		ABC	560/40	463	(500-¾)	DE	560/50	463	(500-1)
	28		AB	600/50	513	(600-1)	CDE	600/60	513	(600-1¼)
CIR	10		AB	560-1¼	463	(500-1¼)	CDE	560-1½	463	(500-1½)
	28		AB	600-1¼	503	(600-1¼)	CDE	600-1½	503	(600-1½)

Visibility in Statute Miles

All minimums in parentheses not applicable to Civil Pilots. Military Pilots refer to appropriate regulations.

Radar Minima:

1. Minima shown are the lowest permitted by established criteria. Pilots should consult applicable directives for their category of aircraft.
2. The circling MDA and weather minima to be used are those for the runway to which the final approach is flown- not the landing runway. In the above RADAR MINIMA example, a category C aircraft flying a radar approach to runway 10, circling to land on runway 28, must use an MDA of 560 feet with weather minima of 500-1½.

NOTE: Military RADAR MINIMA may be shown with communications symbology that indicates emergency frequency monitoring capability by the radar facility as follows:

(E) VHF and UHF emergency frequencies monitored

(V) VHF emergency frequency (121.5) monitored

(U) UHF emergency frequency (243.0) monitored

Additionally, unmonitored frequencies which are available on request from the controlling agency may be annotated with an "x".

⚠ Alternate Minimums not standard. Civil users refer to tabulation. USA/USN/USAF pilots refer to appropriate regulations.

⚠ NA Alternate minimums are Not Authorized due to unmonitored facility or absence of weather reporting service.

⚠ Takeoff Minimums not standard and/or Departure Procedures are published. Refer to tabulation.

TERMS/LANDING MINIMA DATA

Legend 21. Instrument Approach Procedures Explanation of Terms.

©ASA

13290

GENERAL INFO

GENERAL INFORMATION

This publication is issued every 56 days and includes Standard Instrument Approach Procedures (SIAPs), Standard Instrument Departures (SIDs), Standard Terminal Arrivals (STARs), IFR Takeoff Minimums and (Obstacle) Departure Procedures (ODPs), IFR Alternate Minimums, and Radar Instrument Approach Minimums for use by civil and military aviation. The organization responsible for SIAPs, Radar Minimums, SIDs, STARs and graphic ODPs is identified in parentheses in the top margin of the procedure; e.g., (FAA), (FAA-O), (USA), (USAF), (USN). SIAPs with the (FAA) and (FAA-O) designation are regulated under 14 CFR, Part 97. SIAPs with the (FAA-O) designation have been developed under Other Transaction Agreement (OTA) by private providers and have been certified by the FAA. See 14 CFR, Part 91.175 (a) and the AIM for further details. 14 CFR, Part 91.175 (g) and the Special Notices section of the Airport/Facility Directory contains information on civil operations at military airports.

STANDARD TERMINAL ARRIVALS AND DEPARTURE PROCEDURES

The use of the associated codified STAR/DP and transition identifiers are requested of users when filing flight plans via teletype and are required for users filing flight plans via computer interface. It must be noted that when filing a STAR/DP with a transition, the first three coded characters of the STAR and the last three coded characters of the DP are replaced by the transition code. Examples: ACTON SIX ARRIVAL, file (AQN.AQN6); ACTON SIX ARRIVAL, EDNAS TRANSITION, file (EDNAS.AQN6). FREEHOLD THREE DEPARTURE, file (FREH3.RBV), FREEHOLD THREE DEPARTURE, ELWOOD CITY TRANSITION, file (FREH3.EWC).

RNAV DP and STAR. Effective March 15, 2007, these procedures, formerly identified as Type-A and Type-B, will be designated as RNAV 1 in accordance with amended Advisory Circular (AC) and ICAO terminology.

Refer to AC 90-100A U.S. TERMINAL AND EN ROUTE AREA NAVIGATION (RNAV) OPERATIONS and the Aeronautical Information Manual for additional guidance regarding these procedures.

Standard RNAV 1 Procedure Chart Notes

NOTE: RNAV 1

NOTE: DME/DME/IRU or GPS required

Some procedures may require use of GPS and will be identified by a "GPS required" note.

RNAV 1 Procedure Characteristics and Operations

1. Require use of an RNAV system with DME/DME/IRU, and/or GPS inputs.
2. Require use of a CDI, flight director, and/or autopilot, in lateral navigation mode, for flight guidance while operating on RNAV paths (track, course, or direct leg). Other methods providing an equivalent level of performance may be acceptable.
3. RNAV paths may start as low as 500 feet above airport elevation.

GENERAL INFO

13290

14149

GENERAL INFO

ABBREVIATIONS

R.....	Radial
RA.....	Radio Altimeter setting height
RAIL.....	Runway Alignment Indicator Lights
RCLS.....	Runway Centerline Light System
REIL.....	Runway End Identifier Lights
RF.....	Radius-to-Fix
RLLS.....	Runway Lead-in Light System
RNAV.....	Area Navigation
RNP.....	Required Navigation Performance
RPI.....	Runway Point of Intercept(ion)
RRL.....	Runway Remaining Lights
Rwy.....	Runway
RVR.....	Runway Visual Range
S.....	Straight-in
SALS.....	Short Approach Light System
SSALR.....	Simplified Short Approach Light System with RAIL
SDF.....	Simplified Directional Facility
SM.....	Statute Mile
SOIA.....	Simultaneous Offset Instrument Approach
TAA.....	Terminal Arrival Area
TAC.....	TACAN
TCH.....	Threshold Crossing Height (height in feet Above Ground level)
TDZ.....	Touchdown Zone
TDZE.....	Touchdown Zone Elevation
TDZ/CL.....	Touchdown Zone and Runway Centerline Lighting
TDZL.....	Touchdown Zone Lights
THR.....	Threshold
THRE.....	Threshold Elevation
TODA.....	Takeoff Distance Available
TORA.....	Takeoff Run Available
TR.....	Track
VASI.....	Visual Approach Slope Indicator
VCOA.....	Visual Climb Over Airport
VDP.....	Visual Descent Point
VGSI.....	Visual Glide Slope Indicator
VNAV.....	Vertical Navigation
WAAS.....	Wide Area Augmentation System
WP/WPT.....	Waypoint (RNAV)

GENERAL INFO

14149

Legend 23A. Abbreviations.

©ASA

14149


GENERAL INFO

ABBREVIATIONS

AAUP.....	Attention All Users Page	HAA.....	Height above Airport
ADF.....	Automatic Direction Finder	HAL.....	Height above Landing
AFIS.....	Automatic Flight Information Service	HAT.....	Height above Touchdown
ALS.....	Approach Light System	HATh.....	Height Above Threshold
ALSF.....	Approach Light System with Sequenced Flashing Lights	HGS.....	Head-up Guidance System
AP.....	Autopilot System	HIRL.....	High Intensity Runway Lights
APCH.....	Approach	HUD.....	Head-up Display
APP CON.....	Approach Control	IAF.....	Initial Approach Fix
ARR.....	Arrival	ICAO.....	International Civil Aviation Organization
ASOS.....	Automated Surface Observing System	IF.....	Intermediate Fix
ASR/PAR.....	Published Radar Minimums at this Airport	IM.....	Inner Marker
ATIS.....	Automatic Terminal Information Service	INT.....	Intersection
AUNICOM.....	Automated UNICOM	LAAS.....	Local Area Augmentation System
AWOS.....	Automated Weather Observing System	LDA.....	Localizer Type Directional Aid
AZ.....	Azimuth	Ldg.....	Landing
BC.....	Back Course	LRL.....	Low Intensity Runway Lights
BND.....	Bound	LNAV.....	Lateral Navigation
C.....	Circling	LOC.....	Localizer
CAT.....	Category	LP.....	Localizer Performance
CCW.....	Counter Clockwise	LPV.....	Localizer Performance with Vertical Guidance
CDI.....	Course Deviation Indicator	LR.....	Lead Radial. Provides at least 2 NM (Copter 1 NM) of lead to assist in turning onto the intermediate/final course.
Chan.....	Channel	MAA.....	Maximum Authorized Altitude
CIR.....	Circling	MALS.....	Medium Intensity Approach Light System
CLNC DEL.....	Clearance Delivery	MALSR.....	Medium Intensity Approach Light System with RAIL
CNF.....	Computer Navigation Fix	MAP.....	Missed Approach Point
CTAF.....	Common Traffic Advisory Frequency	MDA.....	Minimum Descent Altitude
CW.....	Clockwise	MIRL.....	Medium Intensity Runway Lights
DA.....	Decision Altitude	MLS.....	Microwave Landing System
DER.....	Departure End of Runway	MM.....	Middle Marker
DH.....	Decision Height	MRA.....	Minimum Reception Altitude
DME.....	Distance Measuring Equipment	N/A.....	Not Applicable
DTHR.....	Displaced Threshold	NA.....	Not Authorized
ELEV.....	Elevation	NDB.....	Non-directional Radio Beacon
EMAS.....	Engineered Material Arresting System	NFD.....	National Flight Database
FAF.....	Final Approach Fix	NM.....	Nautical Mile
FD.....	Flight Director System	NoPT.....	No Procedure Turn Required (Procedure Turn shall not be executed without ATC clearance)
FM.....	Fan Marker	ODALS.....	Omnidirectional Approach Light System
FMS.....	Flight Management System	ODP.....	Obstacle Departure Procedure
GCO.....	Ground Communications Outlet	OM.....	Outer Marker
GLS.....	Ground Based Augmentation System Landing System	PRM.....	Precision Runway Monitor
GPI.....	Ground Point of Interception		
GPS.....	Global Positioning System		
GS.....	Glide Slope		

GENERAL INFO

14149




©ASA

11349

LEGEND

INSTRUMENT APPROACH PROCEDURES (CHARTS)

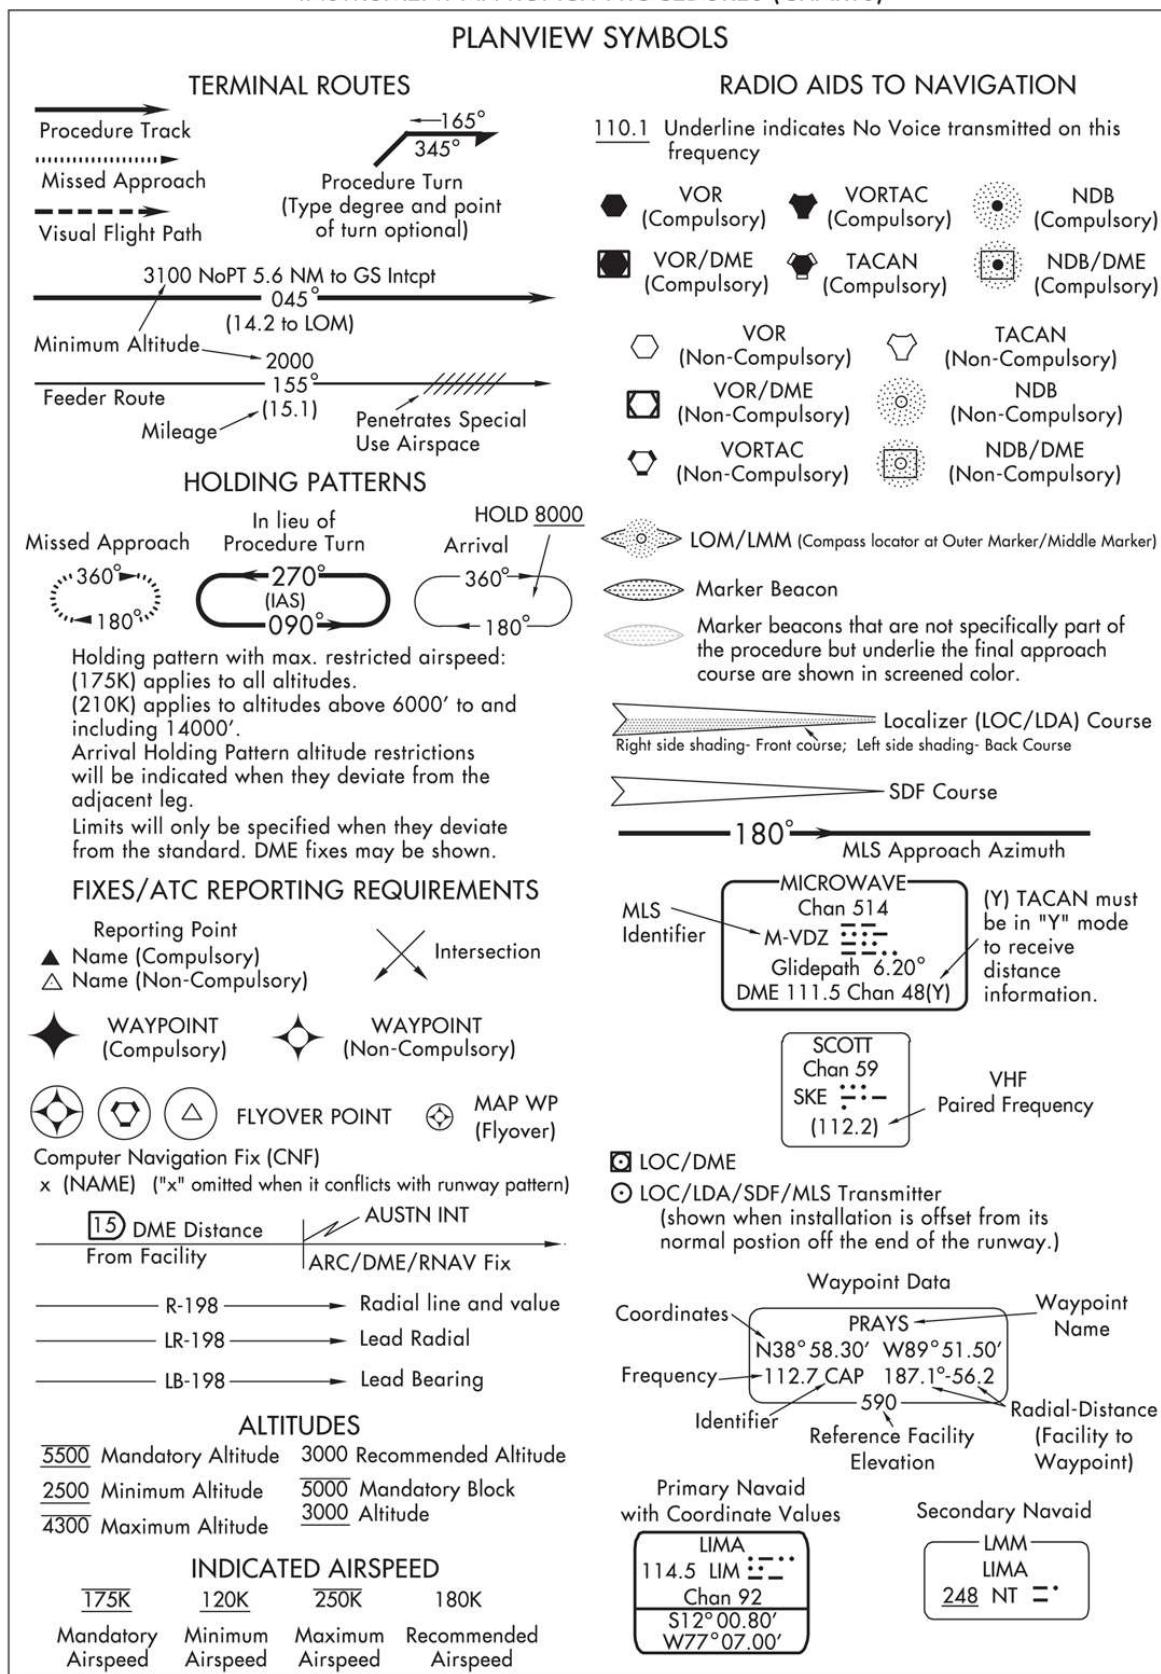

LEGEND


Legend 24. Instrument Approach Procedures (Symbols).

©ASA

10266

LEGEND

INSTRUMENT APPROACH PROCEDURES (CHARTS)

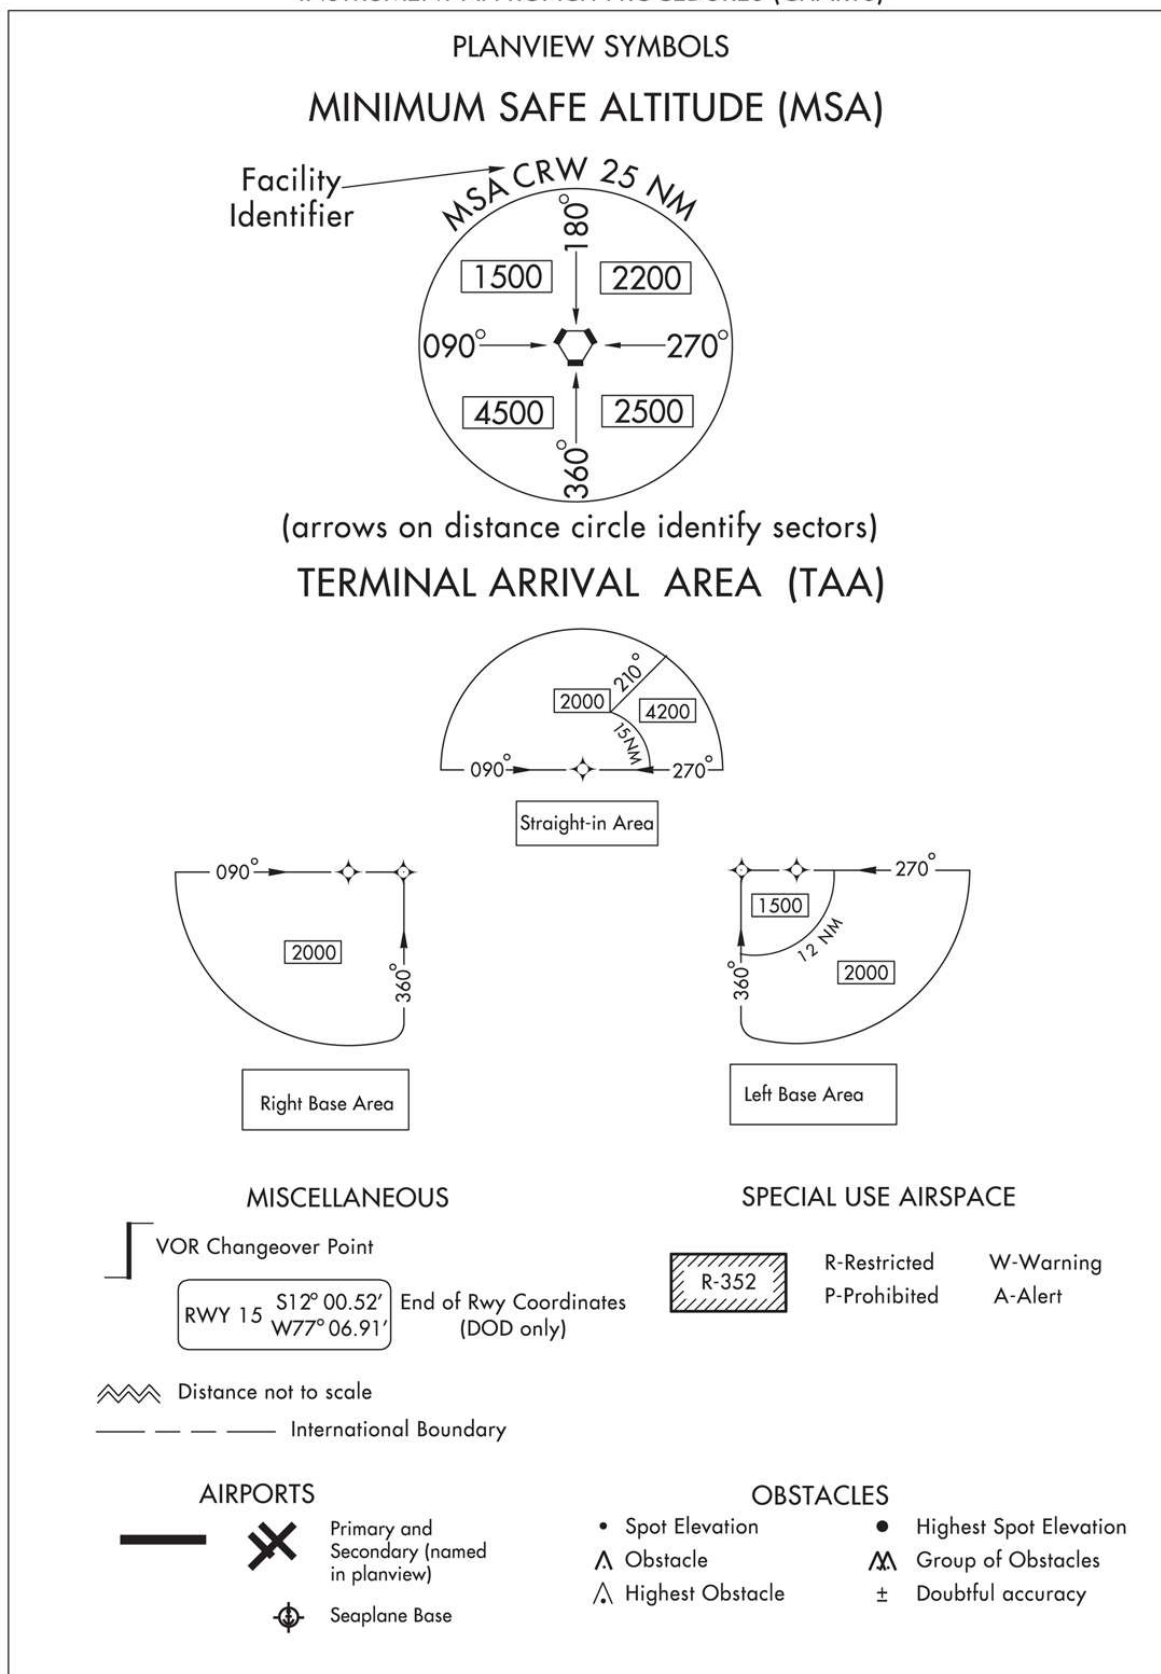

LEGEND

Legend 25. Instrument Approach Procedures (Symbols).

©ASA

13346

LEGEND






INSTRUMENT APPROACH PROCEDURES (CHARTS)

PROFILE VIEW

Two different methods are used for vertical guidance:

a. "GS" indicates an electronic glide slope or barometric vertical guidance is present. In the case of an Instrument Landing System (ILS) and Wide Area Augmentation System (WAAS) LPV approach procedures, an electronic signal provides vertical guidance. Barometric vertical guidance is provided for RNP and LNAV/VNAV instrument approach procedures. All ILS, LPV, RNP, and LNAV/VNAV will be in this format $\text{GS } 3.00^\circ$, located in the lower left or right corner.

b. Other charts without electronic or barometric vertical guidance will be in this format $\text{TCH } 55$, indicating a non-precision vertical descent angle to assist in preventing controlled flight into terrain. On Civil (FAA) procedures, this information is placed above or below the procedure track following the fix it is based on.

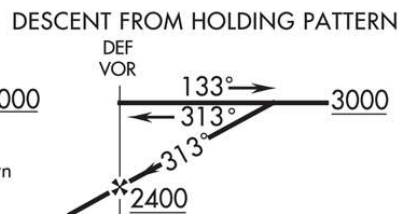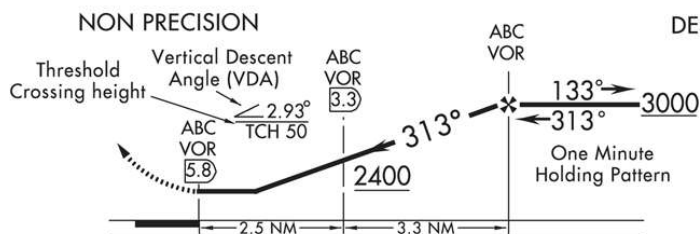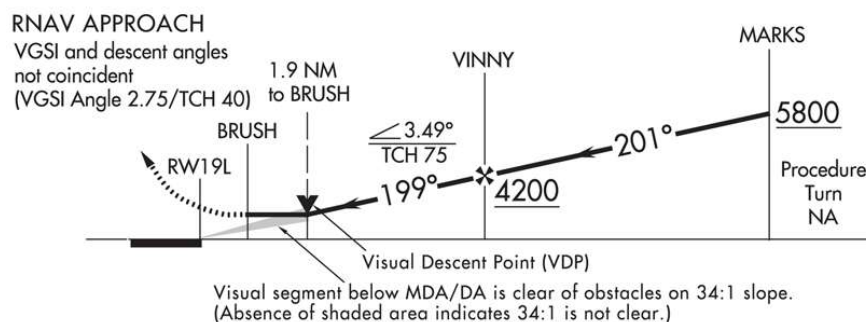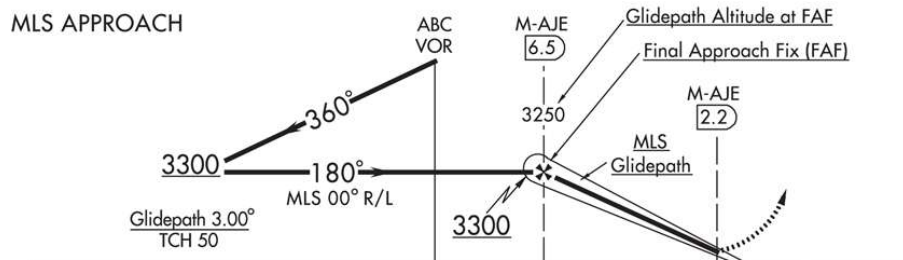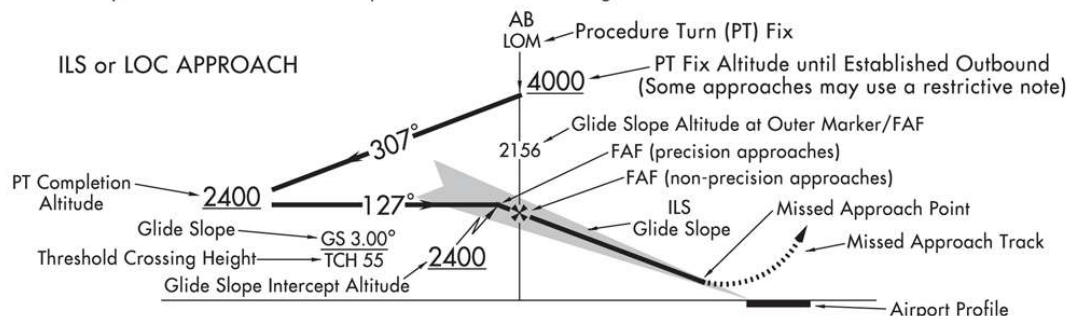

ALTITUDES	
5500	Mandatory Altitude
2500	Minimum Altitude
4300	Maximum Altitude
3000	Recommended Altitude
5000	Mandatory Block Altitude
3000	Altitude

PROFILE SYMBOLS	
	Glide Slope/Glide Path Intercept Altitude and final approach fix for vertically guided approach procedures.
	Visual Descent Point (VDP)
	Visual Flight Path
Note: Facilities and waypoints are depicted as a solid vertical line while fixes and intersections are depicted as a dashed vertical line.	

LEGEND

13346

Legend 26. Instrument Approach Procedures (Profile).

©ASA

CLIMB/DESCENT TABLE 10042

INSTRUMENT TAKEOFF OR APPROACH PROCEDURE CHARTS RATE OF CLIMB/DESCENT TABLE (ft. per min)												
A rate of climb/descent table is provided for use in planning and executing climbs or descents under known or approximate ground speed conditions. It will be especially useful for approaches when the localizer only is used for course guidance. A best speed, power, altitude combination can be programmed which will result in a stable glide rate and altitude favorable for executing a landing if minimums exist upon breakout. Care should always be exercised so that minimum descent altitude and missed approach point are not exceeded.												
CLIMB/ DESCENT ANGLE (degrees and tenths)	ft/NM	GROUND SPEED (knots)										
		60	90	120	150	180	210	240	270	300	330	360
2.0	210	210	320	425	530	635	743	850	955	1060	1165	1275
2.5	265	265	400	530	665	795	930	1060	1195	1325	1460	1590
VERTICAL PATH ANGLE	2.7	287	287	430	574	717	860	1003	1147	1290	1433	1576
	2.8	297	297	446	595	743	892	1041	1189	1338	1486	1635
	2.9	308	308	462	616	770	924	1078	1232	1386	1539	1693
	3.0	318	318	478	637	797	956	1115	1274	1433	1593	1752
	3.1	329	329	494	659	823	988	1152	1317	1481	1646	1810
	3.2	340	340	510	680	850	1020	1189	1359	1529	1699	2039
	3.3	350	350	526	701	876	1052	1227	1402	1577	1752	1927
	3.4	361	361	542	722	903	1083	1264	1444	1625	1805	1986
3.5	370	370	555	745	930	1115	1300	1485	1670	1860	2045	2230
4.0	425	425	640	850	1065	1275	1490	1700	1915	2125	2340	2550
4.5	480	480	715	955	1195	1435	1675	1915	2150	2390	2630	2870
5.0	530	530	795	1065	1330	1595	1860	2125	2390	2660	2925	3190
5.5	585	585	880	1170	1465	1755	2050	2340	2635	2925	3220	3510
6.0	640	640	960	1275	1595	1915	2235	2555	2875	3195	3510	3830
6.5	690	690	1040	1385	1730	2075	2425	2770	3115	3460	3805	4155
7.0	745	745	1120	1490	1865	2240	2610	2985	3355	3730	4105	4475
7.5	800	800	1200	1600	2000	2400	2800	3200	3600	4000	4400	4800
8.0	855	855	1280	1710	2135	2560	2990	3415	3845	4270	4695	5125
8.5	910	910	1360	1815	2270	2725	3180	3630	4085	4540	4995	5450
9.0	960	960	1445	1925	2405	2885	3370	3850	4330	4810	5295	5775
9.5	1015	1015	1525	2035	2540	3050	3560	4065	4575	5085	5590	6100
10.0	1070	1070	1605	2145	2680	3215	3750	4285	4820	5355	5890	6430


CLIMB/DESCENT TABLE 10042

Legend 27. Instrument Takeoff or Approach Procedures
Charts, Rate-of-Climb/Descent Table.

©ASA

12320

LEGEND

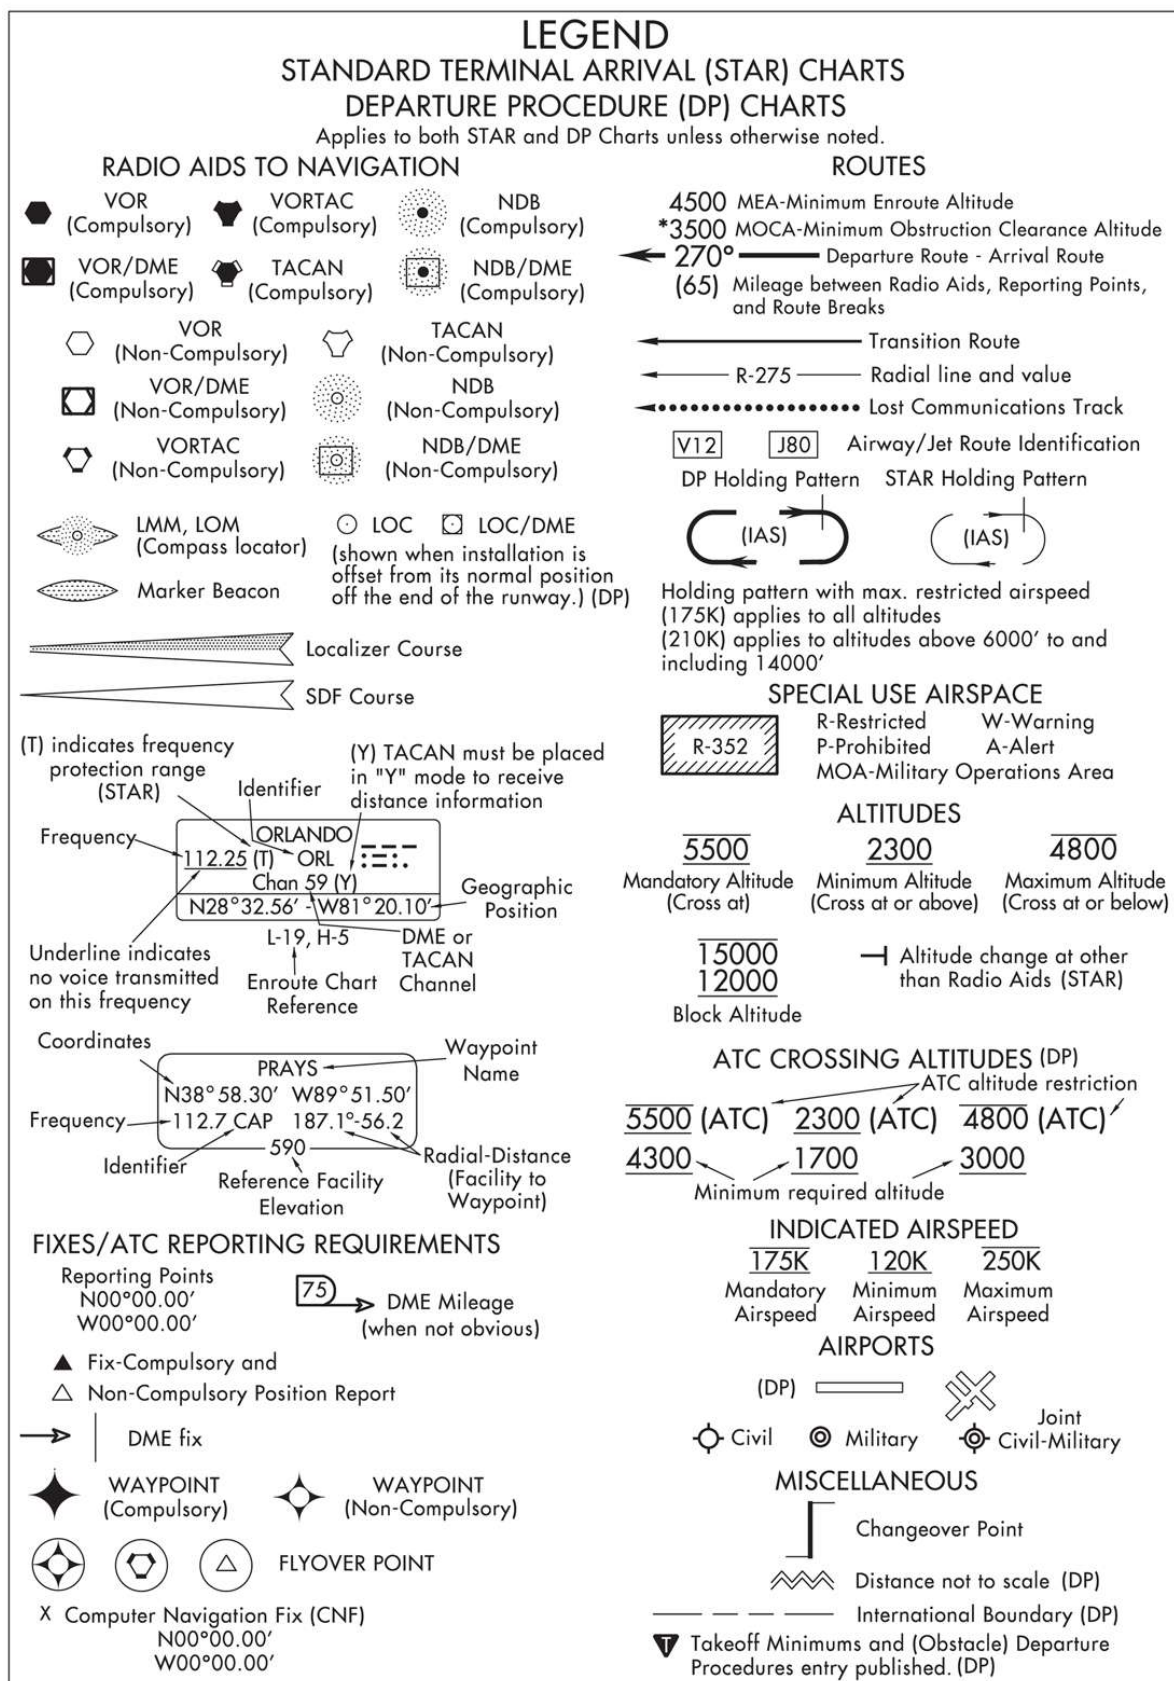

LEGEND

Legend 28. Standard Arrival/Departure Charts.

©ASA


13010

LEGEND


INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM/AIRPORT SKETCH

Runways

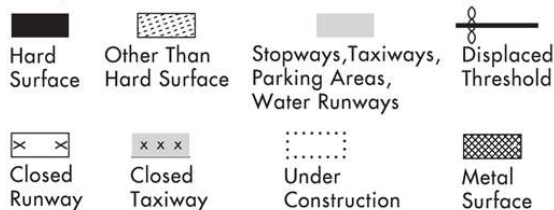


ARRESTING GEAR: Specific arresting gear systems; e.g., BAK12, MA-1A etc., shown on airport diagrams, not applicable to Civil Pilots. Military Pilots refer to appropriate DOD publications.



ARRESTING SYSTEM

REFERENCE FEATURES

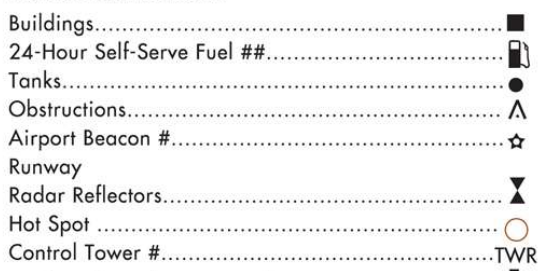

When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and further identified as TWR.


A fuel symbol is shown to indicate 24-hour self-serve fuel available, see appropriate A/FD, Alaska or Pacific Supplement for information.

Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds if any) but excluding areas designated as stopways.

A **D** symbol is shown to indicate runway declared distance information available, see appropriate A/FD, Alaska or Pacific Supplement for distance information.

Runway Weight Bearing Capacity/or PCN Pavement Classification Number is shown as a codified expression.

Refer to the appropriate Supplement/Directory for applicable codes e.g., RWY 14-32 PCN 80 F/D/X/U S-75, D-185, 2S-175, 2D-325

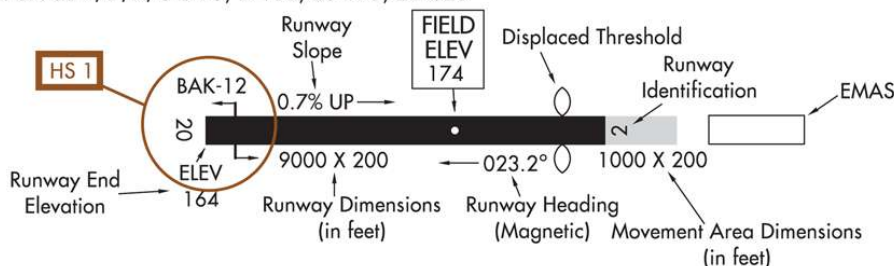

SCOPE

Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations. Airport diagrams are not intended to be used for approach and landing or departure operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

Helicopter Alighting Areas (H) (H) (H) (H) (H)
Negative Symbols used to identify Copter Procedures landing point..... (H) (H) (H) (H) (H)

Runway Threshold elevation.....THRE 123
Runway TDZ elevation.....TDZE 123
Runway Slope.....0.3% DOWN

Runway Slope.....0.8% UP
(shown when runway slope is greater than or equal to 0.3%)

NOTE:

Runway Slope measured to midpoint on runways 8000 feet or longer.

U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of approximately 7 feet and proximity to edge of runway may create an obstruction for some types of aircraft.

Approach light symbols are shown in the Flight Information Handbook.

Airport diagram scales are variable.

True/magnetic North orientation may vary from diagram to diagram

Coordinate values are shown in 1 or 1/2 minute increments. They are further broken down into 6 second ticks, within each 1 minute increments.

Positional accuracy within ± 600 feet unless otherwise noted on the chart.

NOTE:

All new and revised airport diagrams are shown referenced to the World Geodetic System (WGS) (noted on appropriate diagram), and may not be compatible with local coordinates published in FLIP. (Foreign Only)

LEGEND

Legend 29. Airport Diagram.

©ASA

09239


LEGEND

INSTRUMENT APPROACH PROCEDURES (CHARTS) APPROACH LIGHTING SYSTEM - UNITED STATES

Approach lighting and visual glide slope systems are indicated on the airport sketch by an identifier, e.g., (A₂), (V), etc.


A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A₁). Negative symbology, e.g., (A₁), (V) indicates Pilot Controlled Lighting (PCL).

RUNWAY TOUCHDOWN ZONE AND CENTERLINE LIGHTING SYSTEMS




AVAILABILITY of TDZ/CL will be shown by NOTE in SKETCH e.g. "TDZ/CL Rwy 15"


APPROACH LIGHTING SYSTEM

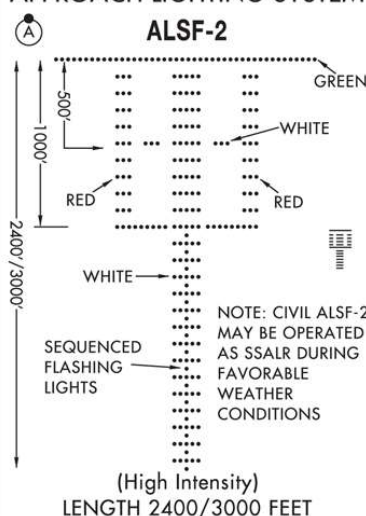


APPROACH LIGHTING SYSTEM

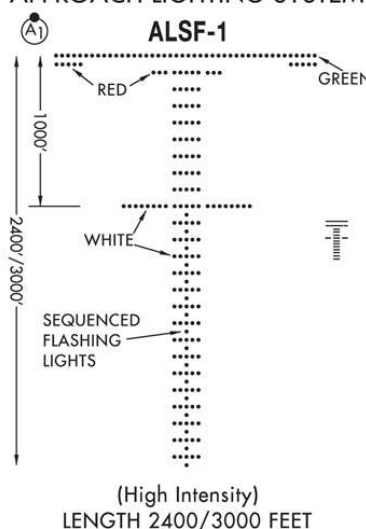


SHORT APPROACH LIGHTING SYSTEM



SIMPLIFIED SHORT APPROACH LIGHTING SYSTEM with Runway Alignment Indicator Lights

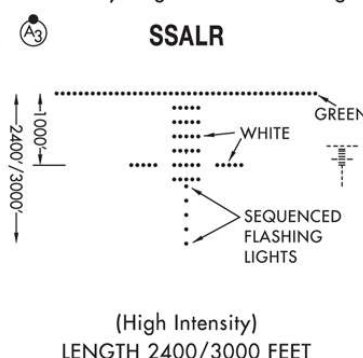


MEDIUM INTENSITY (MALS and MALSF) OR SIMPLIFIED SHORT (SSALS and SSALF) APPROACH LIGHTING SYSTEMS

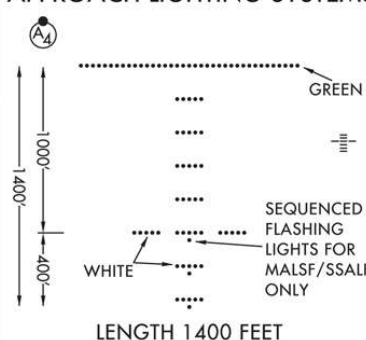

MEDIUM INTENSITY APPROACH LIGHTING SYSTEM with Runway Alignment Indicator Lights



OMNIDIRECTIONAL APPROACH LIGHTING SYSTEM




VISUAL APPROACH SLOPE INDICATOR

VASI

VISUAL APPROACH SLOPE INDICATOR WITH STANDARD THRESHOLD CLEARANCE PROVIDED.


ALL LIGHTS WHITE — TOO HIGH
FAR LIGHTS RED — ON GLIDE SLOPE
NEAR LIGHTS WHITE — TOO LOW
ALL LIGHTS RED — TOO LOW

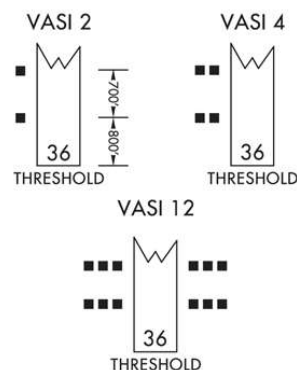

VISUAL APPROACH SLOPE INDICATOR

VASI

VISUAL APPROACH SLOPE INDICATOR WITH A THRESHOLD CROSSING HEIGHT TO ACCOMMODATE LONG BODIED OR JUMBO AIRCRAFT.



LEGEND

Legend 30. Approach Lighting Systems.

©ASA



31/07/2023



04330

LEGEND



INSTRUMENT APPROACH PROCEDURES (CHARTS) APPROACH LIGHTING SYSTEM - UNITED STATES

Approach lighting and visual glide slope systems are indicated on the airport sketch by an identifier, (A₂), (V) etc.


A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A₁). Negative symbology, e.g., (A₁), (V) indicates Pilot Controlled Lighting (PCL).

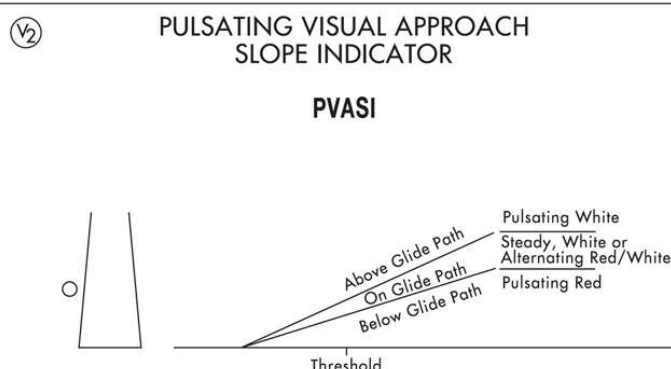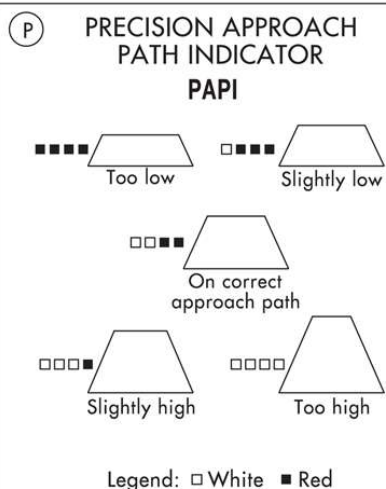

CAUTION: When viewing the pulsating visual approach slope indicators in the pulsating white or pulsating red sectors, it is possible to mistake this lighting aid for another aircraft or a ground vehicle. Pilots should exercise caution when using this type of system.

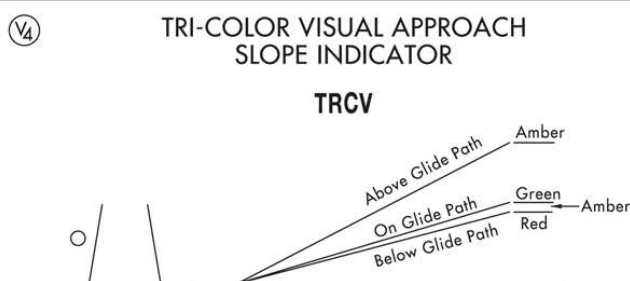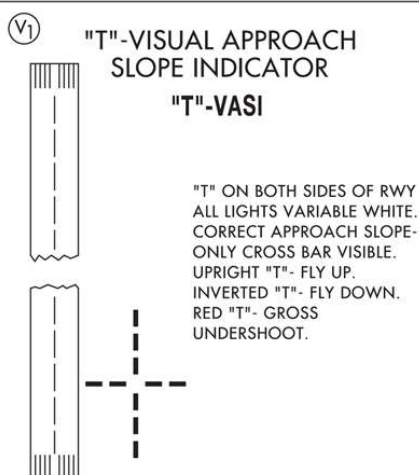

CAUTION: When the aircraft descends from green to red, the pilot may see a dark amber color during the transition from green to red.

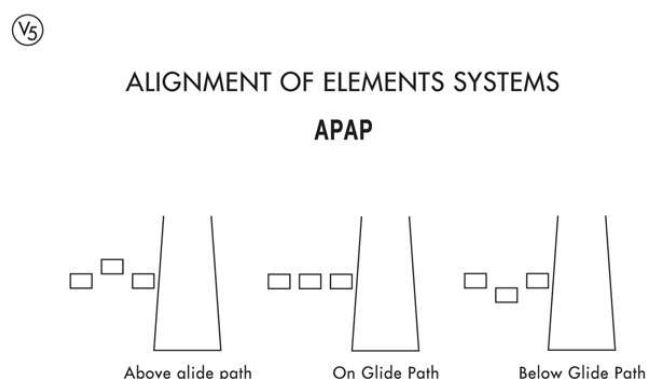

Painted panels which may be lighted at night.
To use the system the pilot positions the aircraft
so the elements are in alignment.

LEGEND

Legend 31. Approach Lighting System.

©ASA

13122

INOP COMPONENTS

INOPERATIVE COMPONENTS OR VISUAL AIDS TABLE

Landing minimums published on instrument approach procedure charts are based upon full operation of all components and visual aids associated with the particular instrument approach chart being used. Higher minimums are required with inoperative components or visual aids as indicated below. If more than one component is inoperative, each minimum is raised to the highest minimum required by any single component that is inoperative. ILS glide slope inoperative minimums are published on the instrument approach charts as localizer minimums. This table may be amended by notes on the approach chart. Such notes apply only to the particular approach category(ies) as stated. See legend page for description of components indicated below.

(1) ILS, MLS, PAR and RNAV (LPV line of minima)

Inoperative Component or Aid	Approach Category	Increase Visibility
ALSF 1 & 2, MALSR, & SSALR	ABCD	¼ mile

(2) ILS with visibility minimum of 1,800 RVR

ALSF 1 & 2, MALSR, & SSALR	ABCD	To 4000 RVR
TDZL RCLS	ABCD	To 2400 RVR*
RVR	ABCD	To ½ mile

*1800 RVR authorized with the use of FD or AP or HUD to DA.

(3) VOR, VOR/DME, TACAN, LOC, LOC/DME, LDA, LDA/DME, SDF, SDF/DME, GPS, ASR and RNAV (LNAV/VNAV, LP, LNAV lines of minima)

Inoperative Visual Aid	Approach Category	Increase Visibility
ALSF 1 & 2, MALSR, & SSALR	ABCD	½ mile
SSALS, MALS, & ODALS	ABC	¼ mile

(4) NDB

ALSF 1 & 2, MALSR, & SSALR	C	½ mile
MALS, SSALS, ODALS	ABD	¼ mile
	ABC	¼ mile

INOP COMPONENTS

Legend 32. Inoperative Components or Visual Aids Table.

©ASA




UNITED STATES GOVERNMENT FLIGHT INFORMATION PUBLICATION IFR ENROUTE LOW ALTITUDE - U.S.

For use up to but not including 18,000' MSL
HORIZONTAL DATUM: NORTH AMERICAN DATUM OF 1983

L E G E N D		
AIRPORTS		
Facilities in BLUE or GREEN have an approved Instrument Approach Procedure and/or RADAR MINIMA published in either the FAA Terminal Procedures Publications or the DoD FLIPs. Those in BLUE have an Instrument Approach Procedure and/or RADAR MINIMA published at least in the High Altitude DoD FLIPs. Facilities in BROWN do not have a published Instrument Approach Procedure or RADAR MINIMA.		
LAND Civil Civil - Military Military Heliport SEA Civil	1. A solid line box enclosing the airport name indicates FAR 93 Special Requirements-see Directory/Supplement 2. "NO SVFR" above the airport name indicates FAR 91 fixed-wing special VFR flight is prohibited 3. [C] or [D] following the airport name indicates Class C or Class D Airspace 4. Pvt - Private use 5. Associated city names for public airports are shown above or preceding the airport name. If airport name and city name are the same, only the airport name is shown. City names for military and private airports are not shown. The airport identifier in parentheses follows the airport name.	
</		

Legend 33. IFR En Route Low Altitude (U.S.)

©ASA

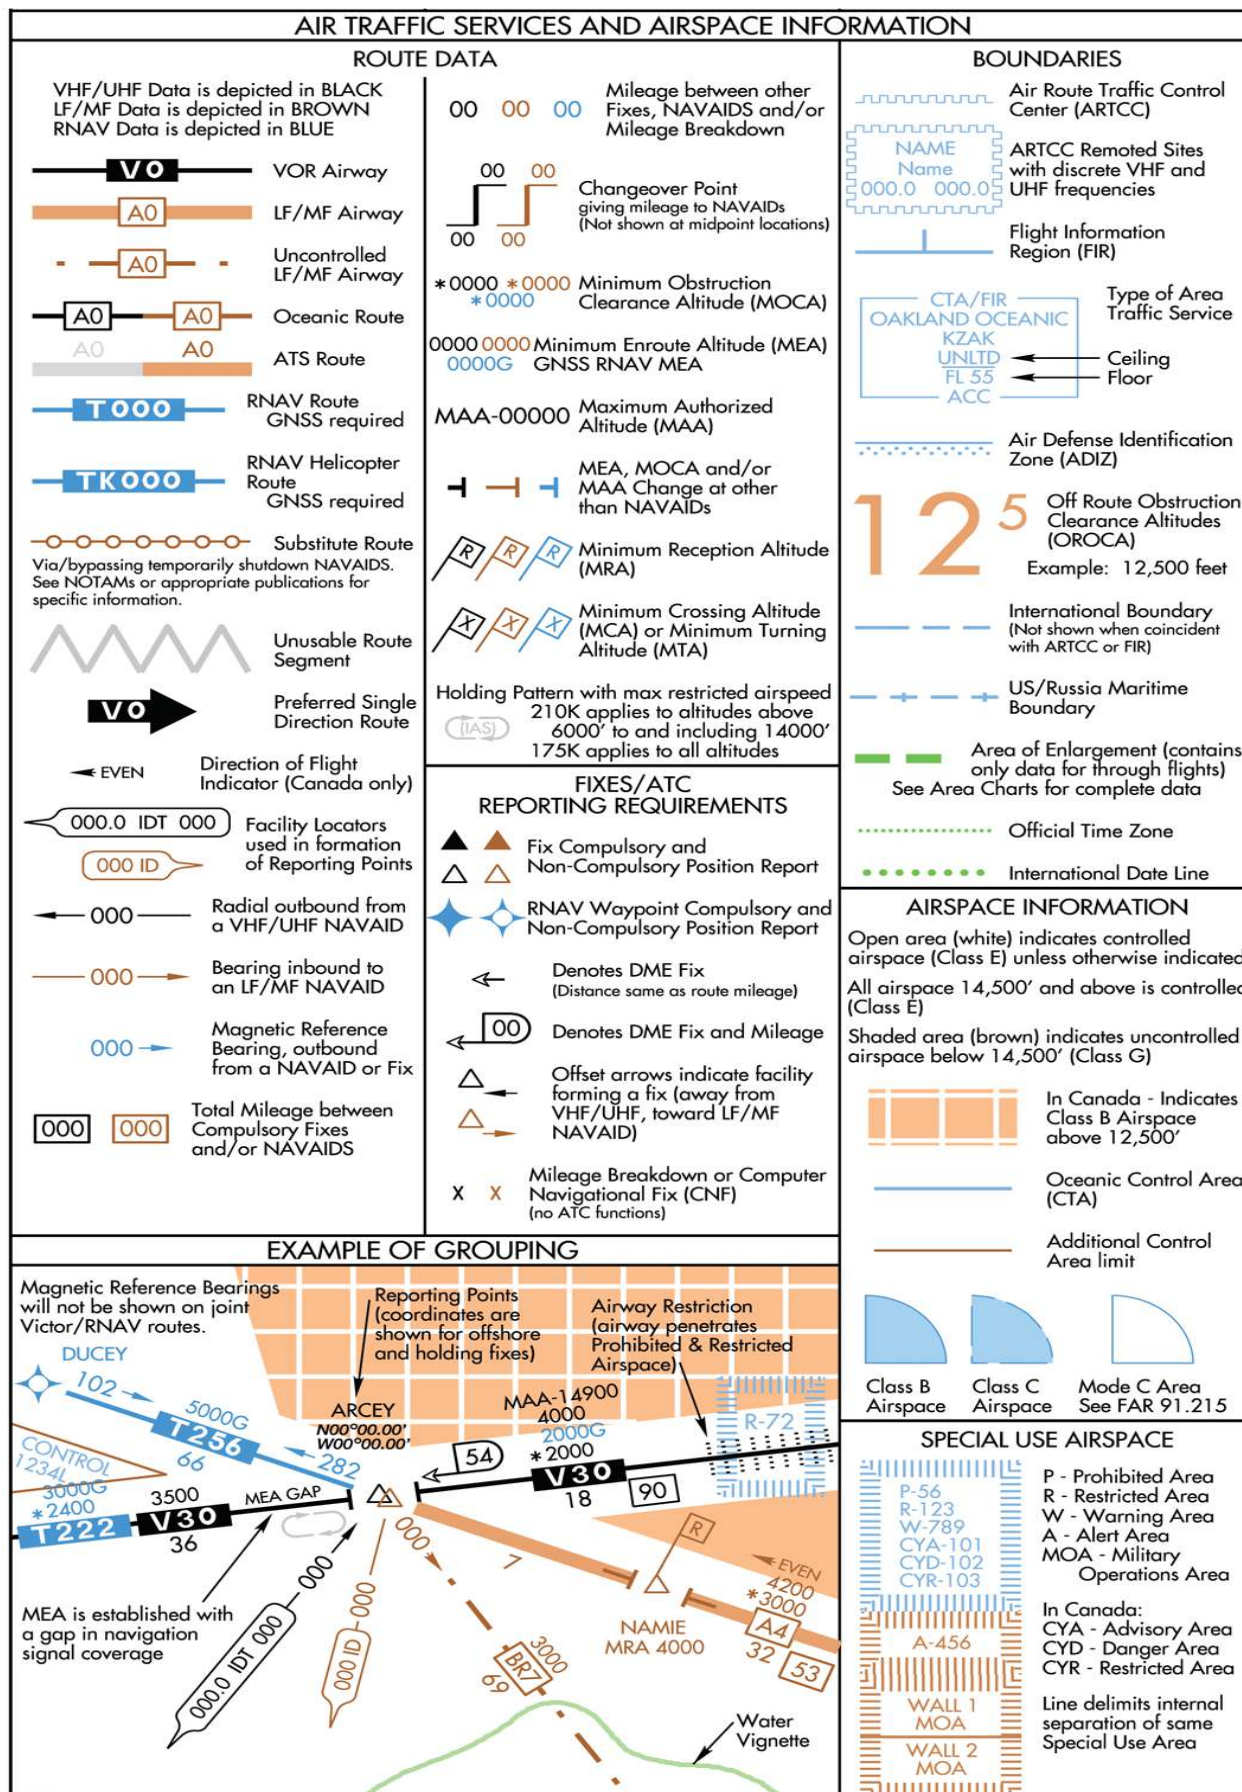


Legend 34. IFR En Route Low Altitude (U.S.)

©ASA



31/07/2023

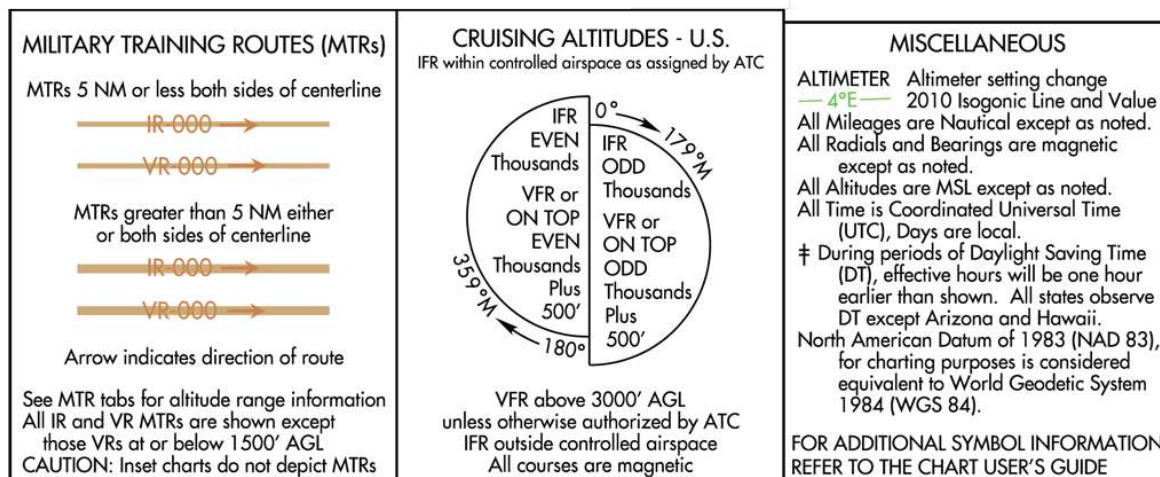


Legend 35. IFR En Route Low Altitude (U.S.)

©ASA

AIRCRAFT EQUIPMENT SUFFIXES	
SUFFIX	Aircraft Equipment Suffixes
	NO DME
/X	No transponder
/T	Transponder with no Mode C
/U	Transponder with Mode C
	DME
/D	No transponder
/B	Transponder with no Mode C
/A	Transponder with Mode C
	TACAN ONLY
/M	No transponder
/N	Transponder with no Mode C
/P	Transponder with Mode C
	AREA NAVIGATION (RNAV)
/Y	LORAN, VOR/DME, or INS with no transponder
/C	LORAN, VOR/DME, or INS, transponder with no Mode C
/I	LORAN, VOR/DME, or INS, transponder with Mode C
	ADVANCED RNAV WITH TRANSPONDER AND MODE C (if an aircraft is unable to operate with a transponder and/or Mode C, it will revert to the appropriate code listed above under Area Navigation.)
/E	Flight Management System (FMS) with en route, terminal, and approach capability. Equipment requirements are: (a) Dual FMS which meets the specifications of AC 25-15, Approval of Flight Management Systems in Transport Category Airplanes; AC 20-129, Airworthiness Approval of Vertical Navigation (VNAV) Systems for use in the U.S. NAS and Alaska; AC 20-130, Airworthiness Approval of Navigation or Flight Management Systems Integrating Multiple Navigation Sensors; or equivalent criteria as approved by Flight Standards. (b) A flight director and autopilot control system capable of following the lateral and vertical FMS flight path. (c) At least dual inertial reference units (IRU's). (d) A database containing the waypoints and speed/altitude constraints for the route and/or procedure to be flown that is automatically loaded into the FMS flight plan. (e) An electronic map. (U.S. and U.S. territories only unless otherwise authorized.)
/F	A single FMS with en route, terminal, and approach capability that meets the equipment requirements of /E, (a) through (d), above. (U.S. and U.S. territories only unless otherwise authorized.)
/G	Global Positioning System (GPS)/Global Navigation Satellite System (GNSS) equipped aircraft with en route and terminal capability.
/R	Required Navigational Performance (Denotes capability to operate in RNP designated airspace and routes)
/W	Reduced Vertical Separation Minima (RVSM)


Legend 36. Aircraft Equipment Suffixes.

©ASA

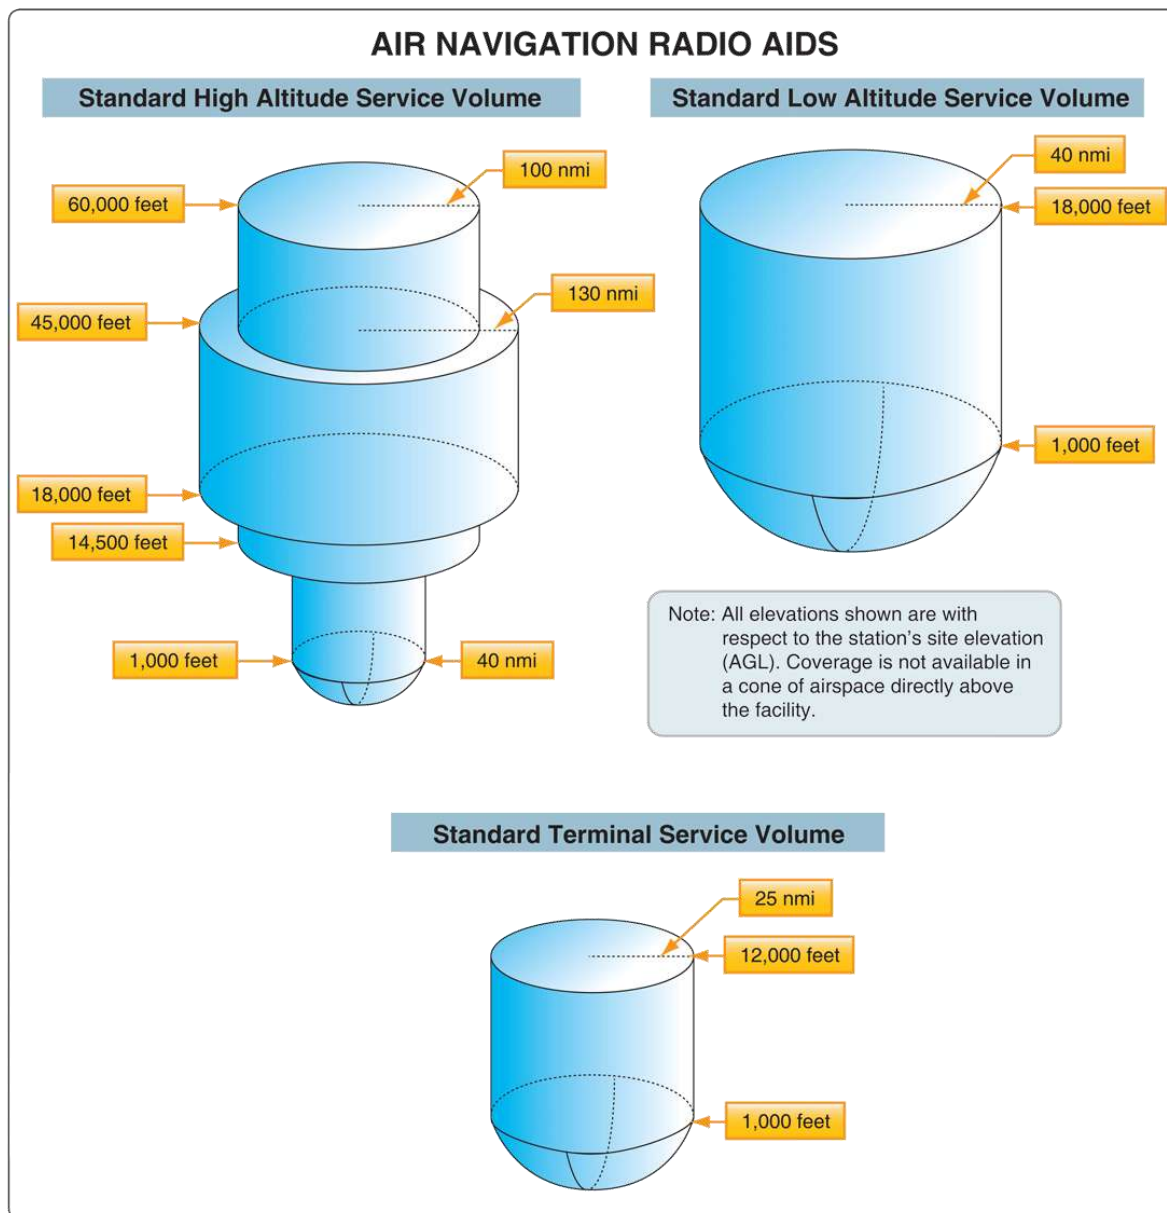


Legend 37. Air Navigation Radio Aids.

©ASA

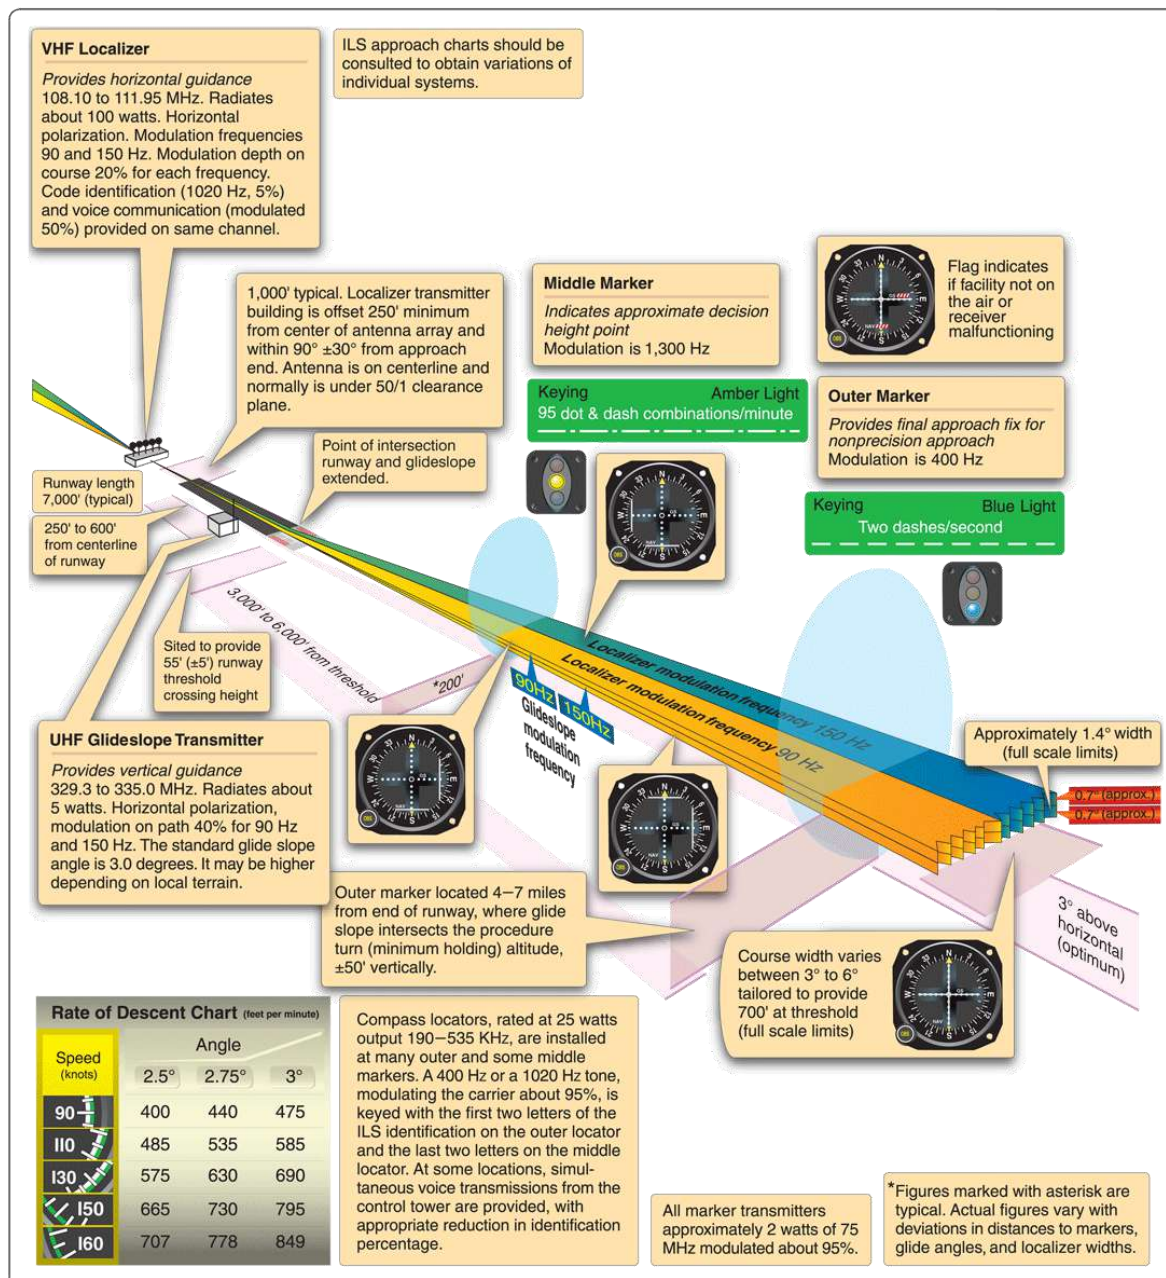

Legend 38. ILS Standard Characteristics and Terminology.

©ASA

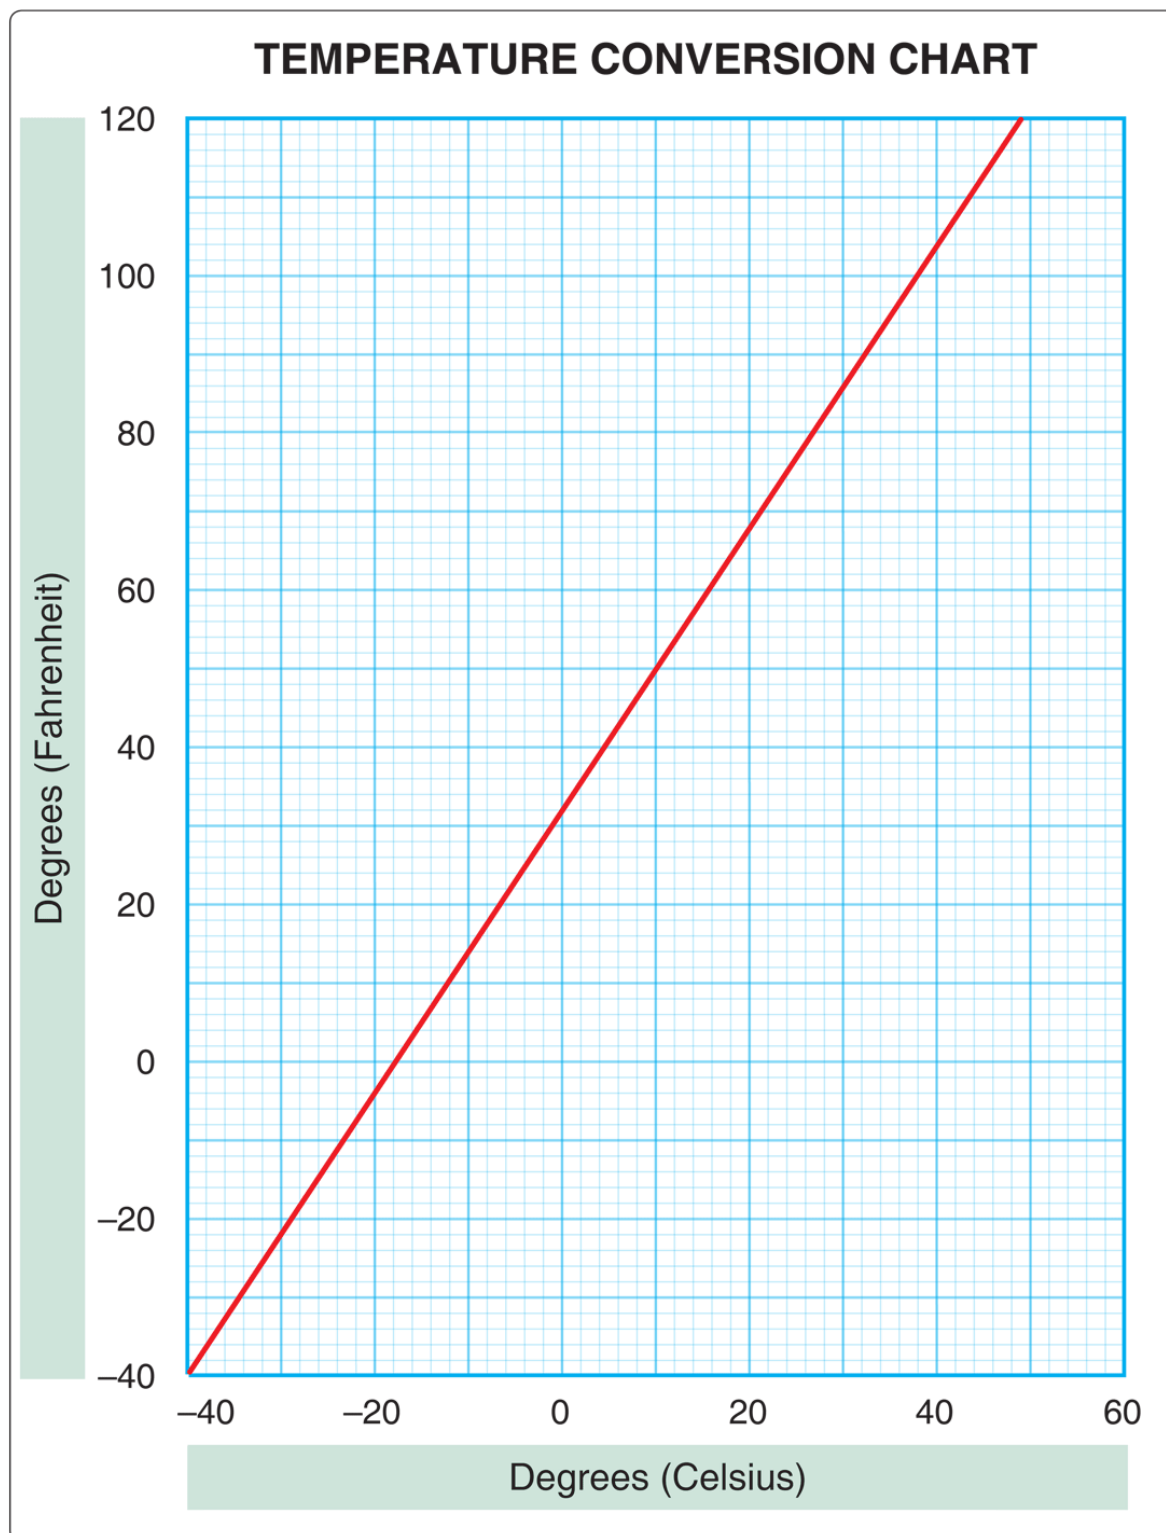

Legend 39. Temperature Conversion Chart.

©ASA


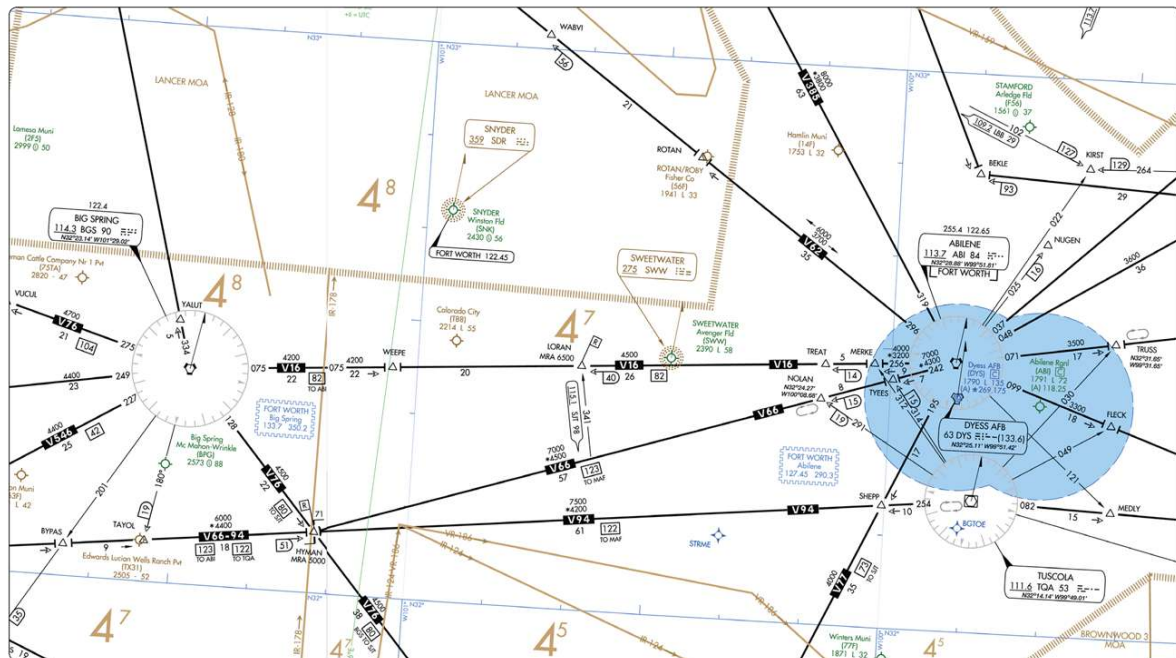


Figure 40. En Route Low-Altitude Chart Segment.
*NOTE: Chart is not to scale and should not be used for navigation.
Chart is for testing purposes only.*

©ASA

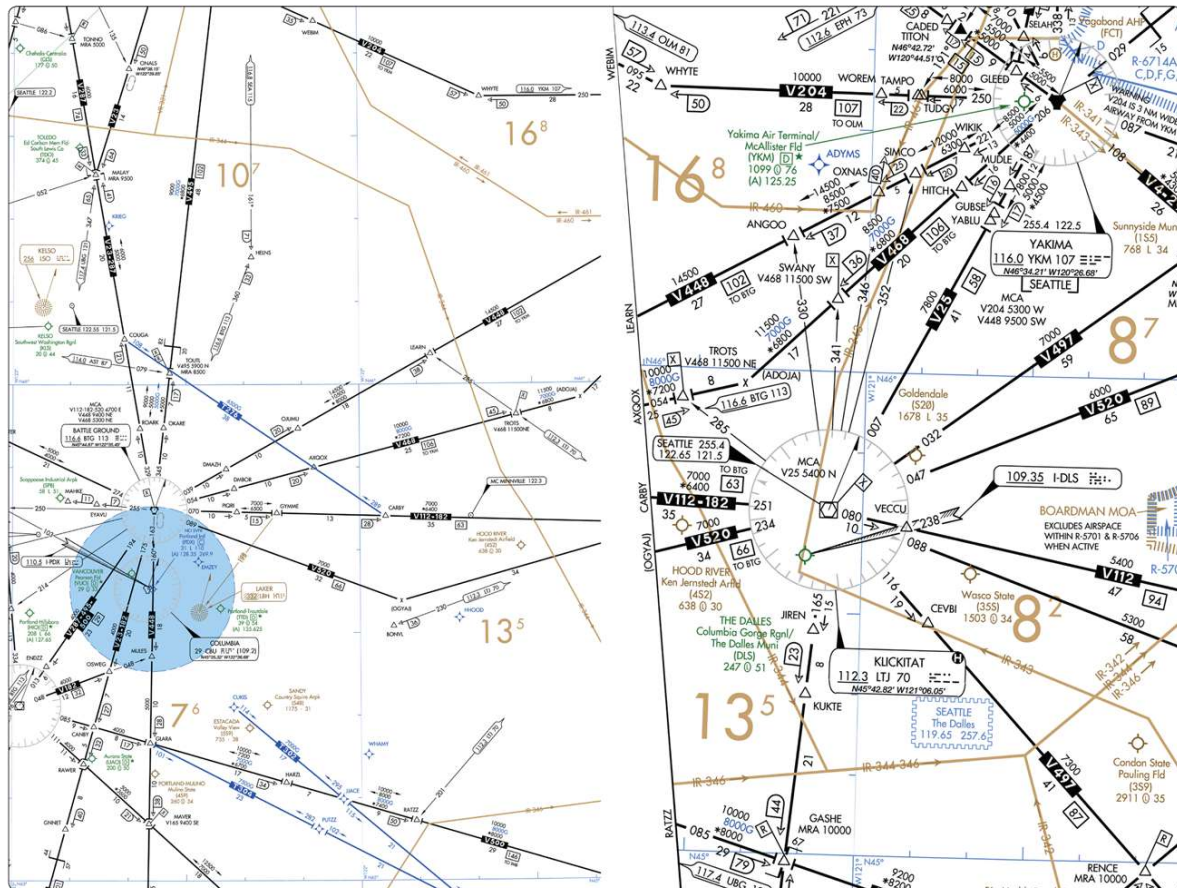

©ASA



Figure 48. CDI—NAV 1.

©ASA



Primera edición

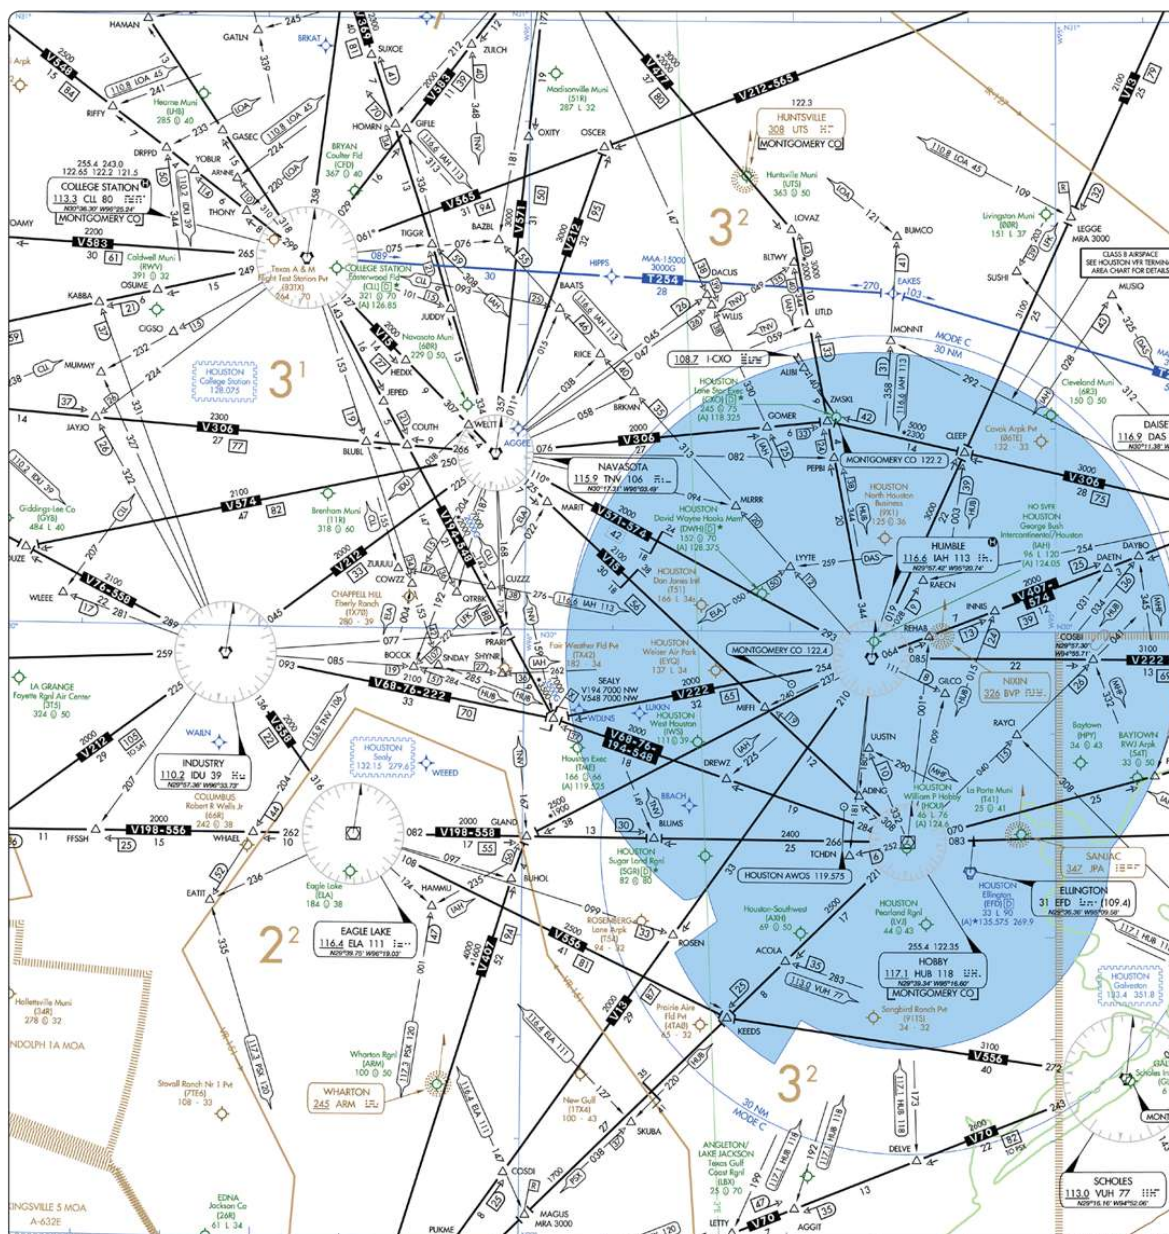


Figure 59. En Route Low-Altitude Chart Segment.
NOTE: Chart is not to scale and should not be used for navigation.
Chart is for testing purposes only.

©ASA



LOUISIANA VOR RECEIVER CHECKPOINTS					
Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Alexandria (Alexandria Intl)	116.1/AEX	G	328	4.3	On runway Rwy 32.
Baton Rouge (Baton Rouge Metro, Ryan).	116.5/BTR	A/1500	063	7.2	Over water tank W side of arpt.
Lafayette (Lafayette Rgnl/Paul Fournet Fld)	109.8/LFT	A/1000	343	22.1	Over rotating beacon at St. Landry Parish–Ahart Fld. arpt.
	109.8/LFT	G	355	0.5	On Twy F run up area Rwy 04L.
	109.8/LFT	G	341	0.9	On Twy B run up area Rwy 11.
	109.8/LFT	G	025	1.4	On Twy J run up area Rwy 22L.
	109.8/LFT	G	039	0.8	On Twy B run up area Rwy 29.
Lake Charles (Lake Charles Rgnl)	113.4/LCH	A/1000	253	6.2	Over rotg bcn on twr.
Monroe (Monroe Rgnl)	117.2/MLU	G	212	0.7	On Twy G South of twr.
Natchez (Concordia Parish)	110.0/HEZ	A/1000	247	10.5	Over hangar NW end of fld.
Reserve (St John The Baptist Parish)	110.8/RQR	A/1500	270	16.8	Over center of bridge.
Tibby (Houma–Terrebonne)	112.0/TBD	A/1000	121	10.7	Over intersection of Rwy 18–36 and 12–30.
Tibby (Thibodaux Muni)	112.0/TBD	A/1000	356	5.0	Over microwave twr near arpt.

84

LOUISIANA

LAFAYETTE RGNL (LFT) 2 SE UTC–6(–5DT) N30°12.30' W91°59.27'
42 B S4 FUEL 100LL, JET A OX 1, 4 Class I, ARFF Index B NOTAM FILE LFT
RWY 04R–22L: H8001X150 (ASPH–GRVD) S–140, D–170, 2S–175, 2D–290 HIRL
RWY 04R: REIL. PAPI(P4L)—GA 3.0° TCH 53'. Pole. Rgt tfc.
RWY 22L: MALSR. PAPI(P4L)—GA 3.0° TCH 52'. Thld displcd 342'. Trees.
RWY 11–29: H5401X148 (ASPH–GRVD) S–85, D–110, 2S–140, 2D–175 MIRL
RWY 11: REIL. PAPI(P4L)—GA 3.0° TCH 35'. Trees. Rgt tfc.
RWY 29: REIL. PAPI(P4L)—GA 3.0° TCH 35'. Tree.
RWY 04L–22R: H4099X75 (ASPH) S–25, D–32 MIRL
RWY 04L: REIL. PAPI(P2L)—GA 3.0° TCH 26'. Tree.
RWY 22R: REIL. PAPI(P2L)—GA 3.0° TCH 27'. Tree. Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04L:TORA–4099	TODA–4099	ASDA–4099	LDA–4099
RWY 04R:TORA–8001	TODA–8001	ASDA–8001	LDA–8001
RWY 11:TORA–5401	TODA–5401	ASDA–5401	LDA–5401
RWY 22L:TORA–8001	TODA–8001	ASDA–8001	LDA–7659
RWY 22R:TORA–4099	TODA–4099	ASDA–4099	LDA–4099
RWY 29:TORA–5401	TODA–5401	ASDA–5401	LDA–5401

ARRESTING GEAR/SYSTEM

RWY 04R: EMAS
RWY 22L: EMAS

AIRPORT REMARKS: Attended continuously. Numerous birds on and invof arpt. PPR for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 337–266–4400. Rwy 04L–22R not avbl for air carrier ops with more than 30 passenger seats. Ctc ground control prior to push back from terminal. 155' oil rig 1 NM southeast of arpt. Rwy 22L runway visual range touchdown avbl. Twy B between Twy C and Twy D clsd to acft with wingspan over 80'. Twy F south of Twy B clsd to single wheel acft over 25,000 lbs and dual wheel acft over 32,000 lbs. Twy F south of Twy B reduces to 40' wide. When twr clsd ACTIVATE MALSR Rwy 22L—CTAF, MIRL Rwy 04L–22R not avbl.

WEATHER DATA SOURCES: ASOS (337) 237–8153 HIWAS 109.8 LFT.

COMMUNICATIONS: CTAF 118.5 ATIS 134.05 UNICOM 122.95

RCO 122.35 (DE RIDDER RADIO)

Ⓡ APP/DEP CON 121.1 (020°–210°) 128.7 (211°–019°) (1130–0430Z‡)

Ⓡ HOUSTON CENTER APP/DEP CON 126.35 (0430–1130Z‡)

TOWER 118.5 (1130–0430Z‡) GND CON 121.8 CLNC DEL 125.55

AIRSPACE: CLASS C svc ctc APP CON svc 1130–0430Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE LFT.

(L) VORTACW 109.8 LFT Chan 35 N30°11.63' W91°59.55' at fld. 36/3E. HIWAS.

LAFFS NDB (LOM) 375 LF N30°17.36' W91°54.48' 216° 6.5 NM to fld. Unmonitored when ATCT clsd.

ILS/DME 110.9 I–TYN Chan 46 Rwy 04R. Class IE.

ILS/DME 109.5 I–LFT Chan 32 Rwy 22L. Class IE. LOM LAFFS NDB. ILS and LOM unmonitored when ATCT clsd.

ASR (1130–0430Z‡)

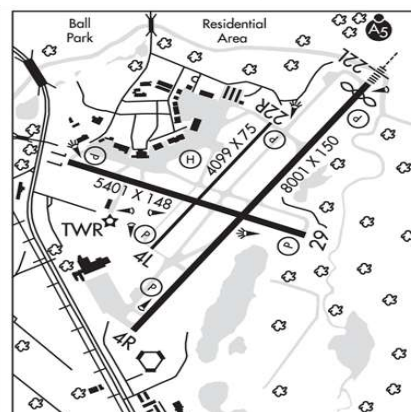


Figure 64. Excerpt from Chart Supplement (LFT).

©ASA

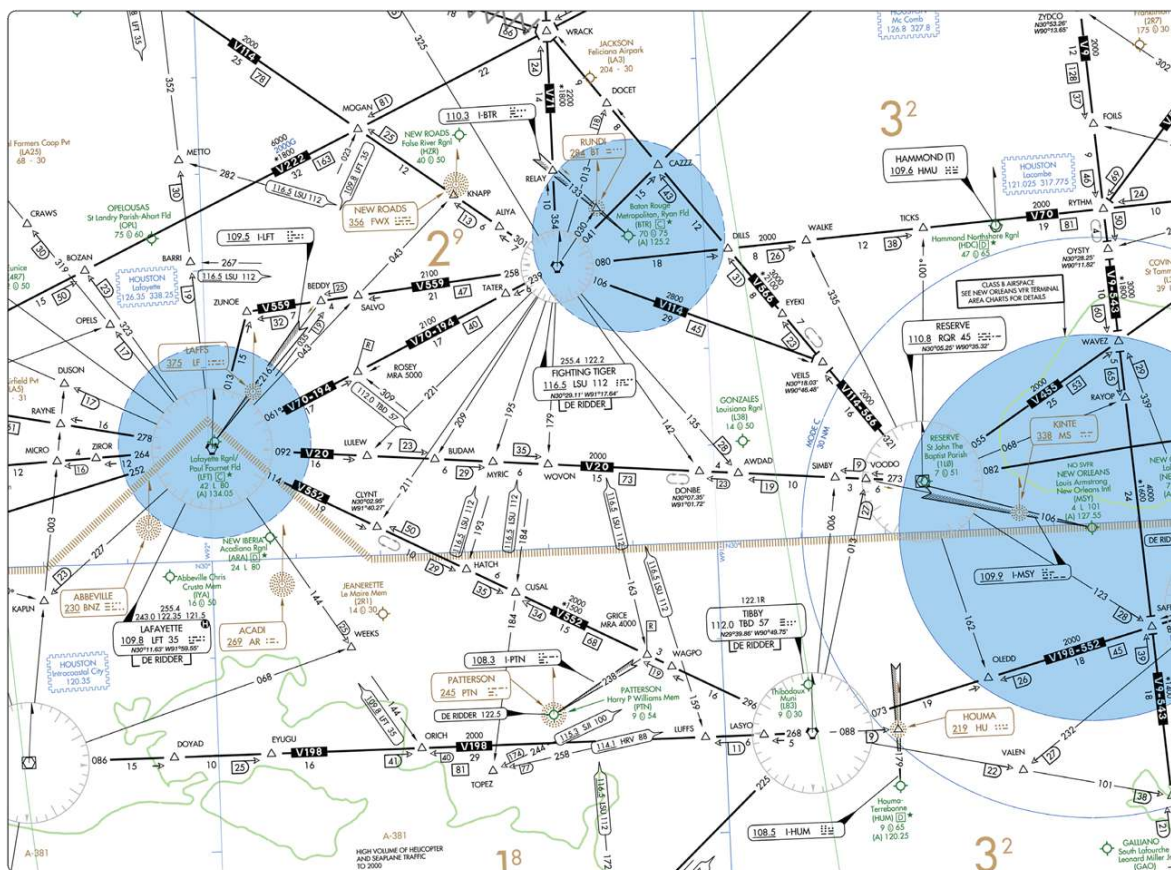


Figure 65. En Route Low-Altitude Chart Segment.
NOTE: Chart is not to scale and should not be used for navigation.
Chart is for testing purposes only.

©ASA



Figure 66. CDI and OBS Indicators.

©ASA

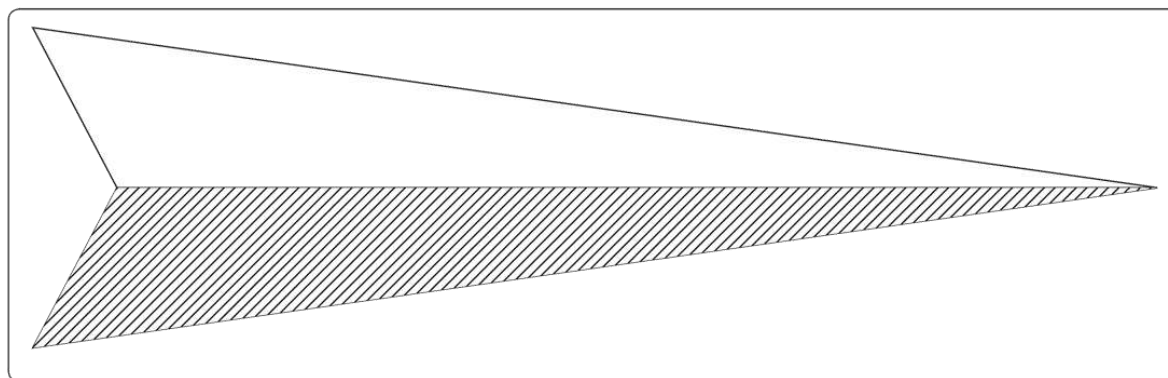


Figure 67. Localizer Symbol.

©ASA



Figure 71A. CDI and OBS Indicators.

©ASA

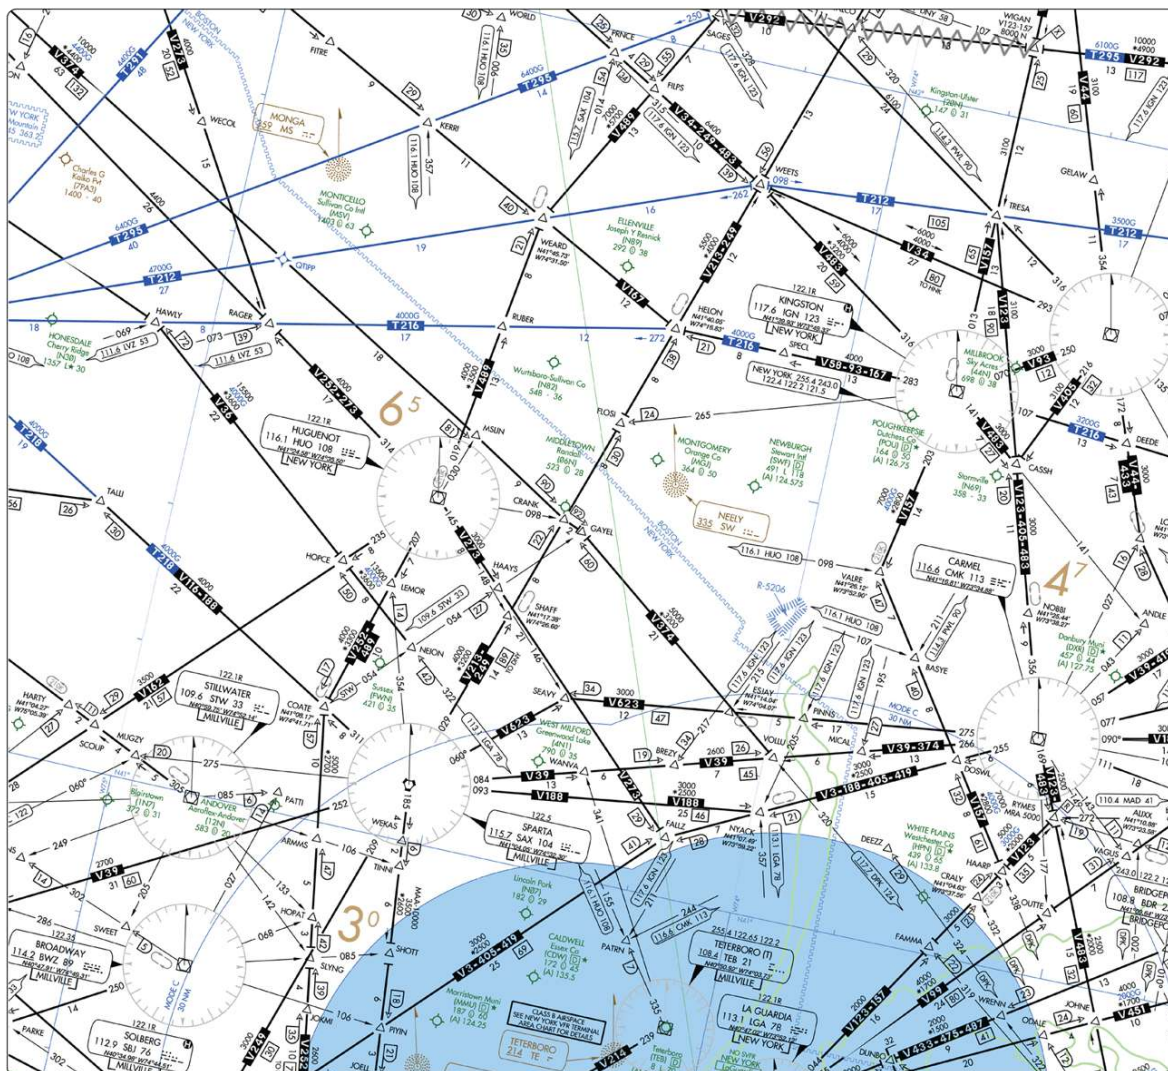


Figure 71. En Route Low-Altitude Chart Segment.
NOTE: Chart is not to scale and should not be used for navigation.
Chart is for testing purposes only.

©ASA



Figure 76. VOR Indications and Excerpts from Chart Supplement (HLN).

©ASA

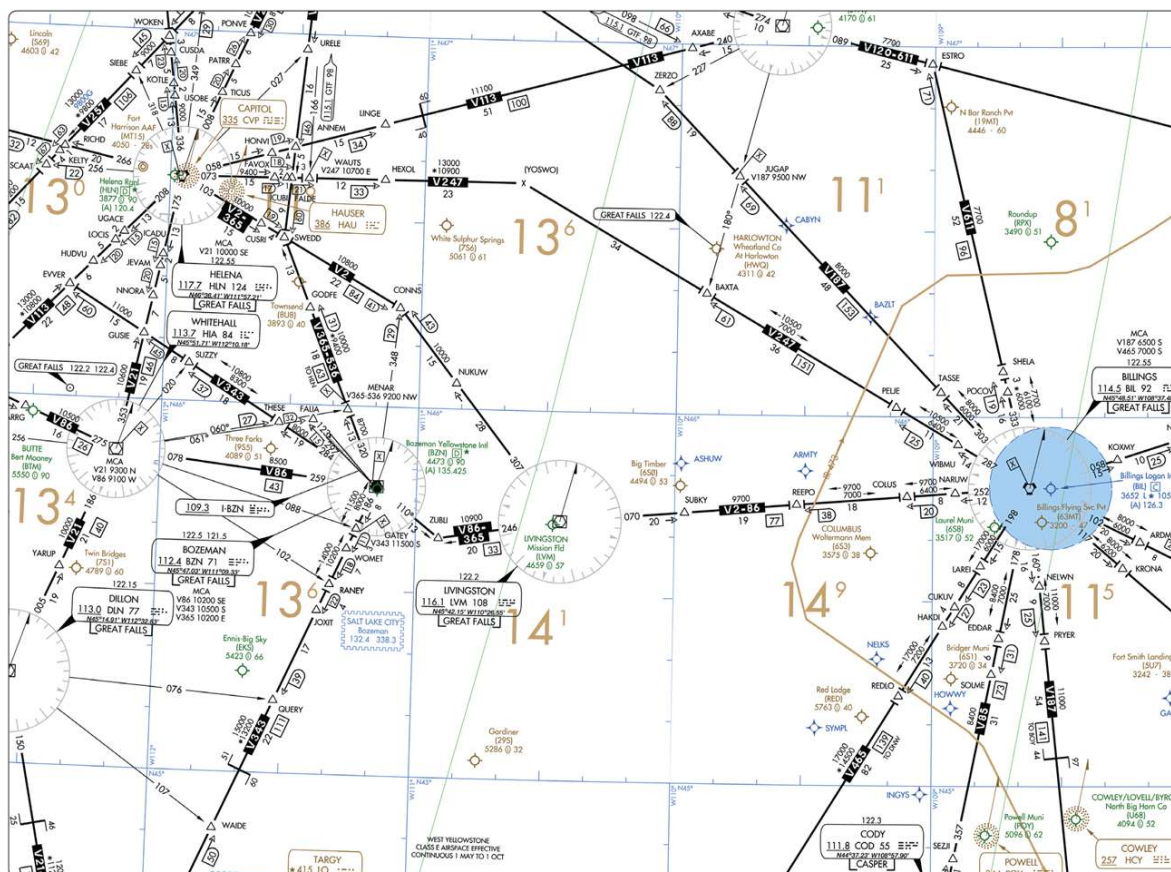


Figure 78. En Route Low-Alitude Chart Segment.
*NOTE: Chart is not to scale and should not be used for navigation.
Chart is for testing purposes only.*

©ASA



Figure 81. Dual VOR System, VOT Check.

©ASA



Figure 82. Dual VOR System, Accuracy Check.

©ASA

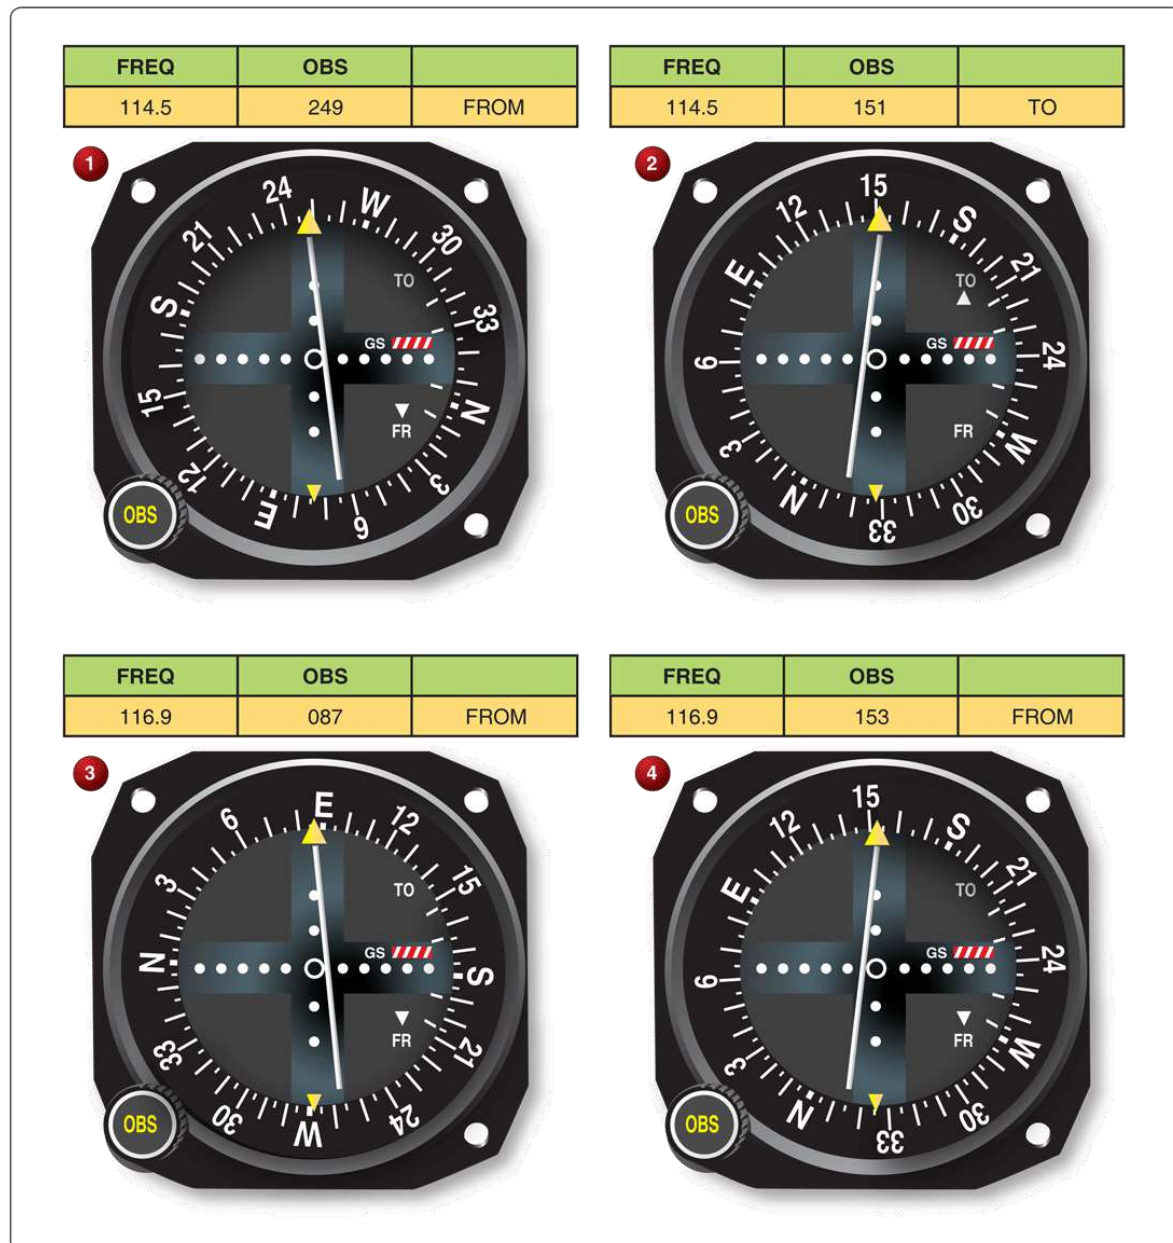


Figure 86. CDI and OBS Indicators.

©ASA

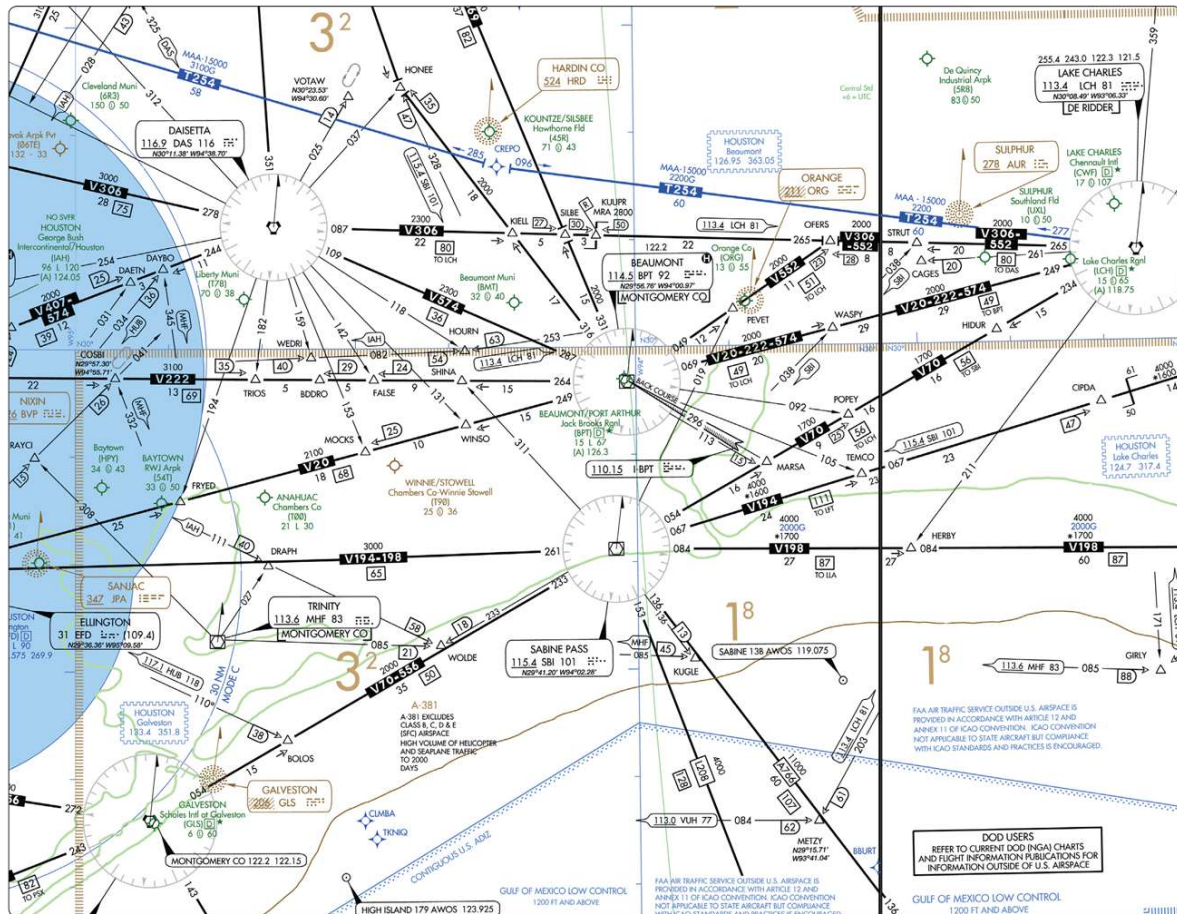


Figure 87. En Route Low-Altitude Chart Segment.
NOTE: Chart is not to scale and should not be used for navigation.
Chart is for testing purposes only.

©ASA



Figure 88. CDI and OBS Indicators.

©ASA

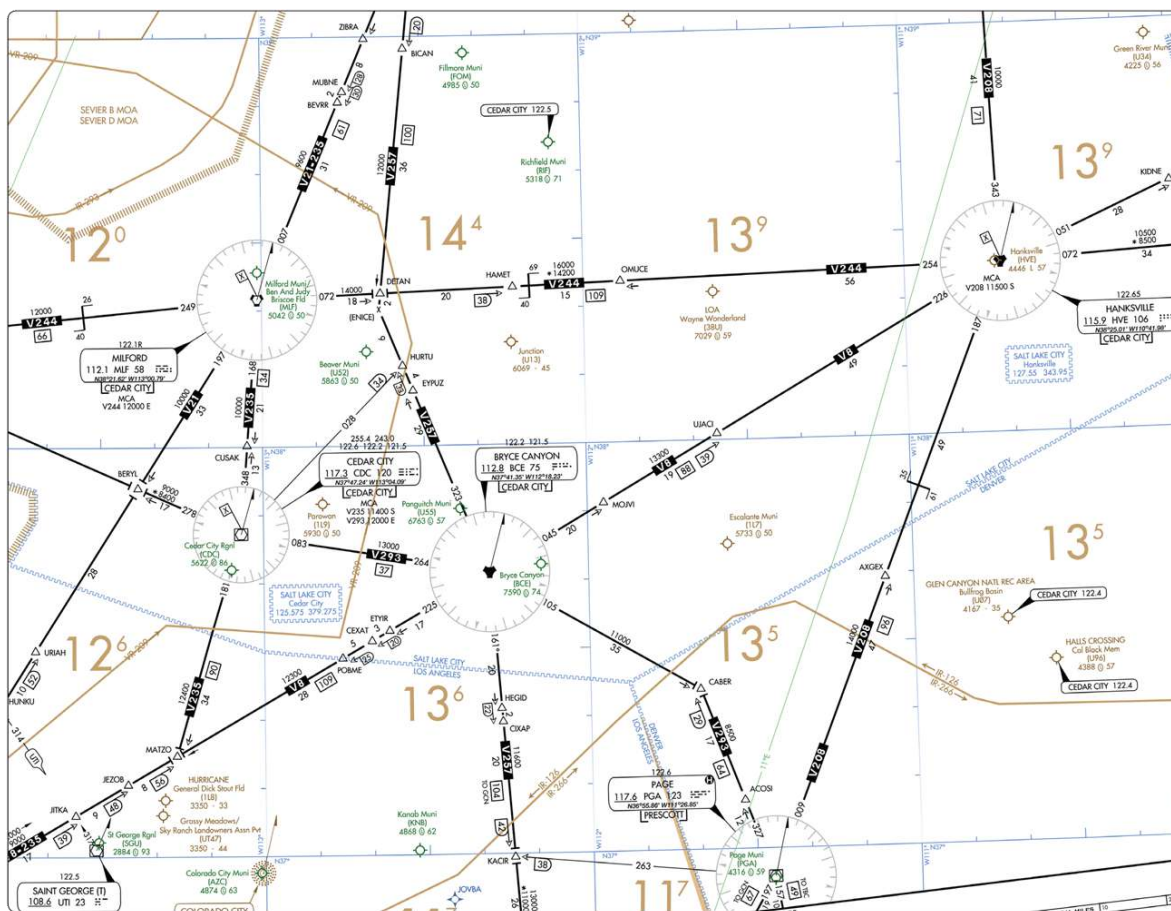


Figure 89. En Route Low-Altitude Chart Segment.
NOTE: Chart is not to scale and should not be used for navigation.
Chart is for testing purposes only.

©ASA

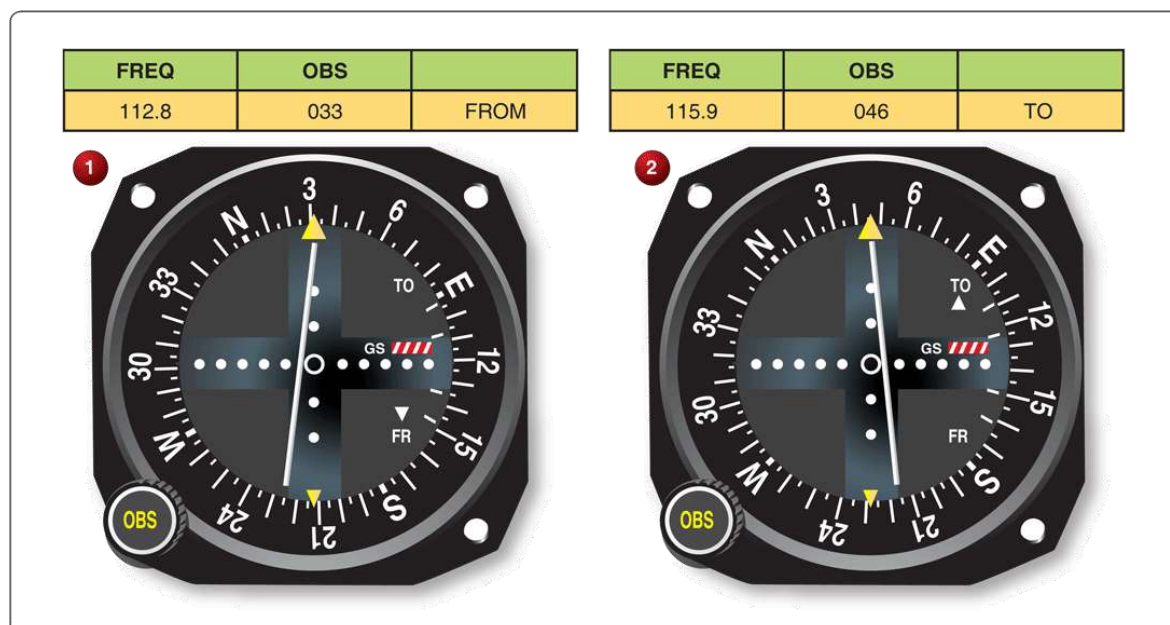


Figure 90. CDI/OBS Indicators.

©ASA

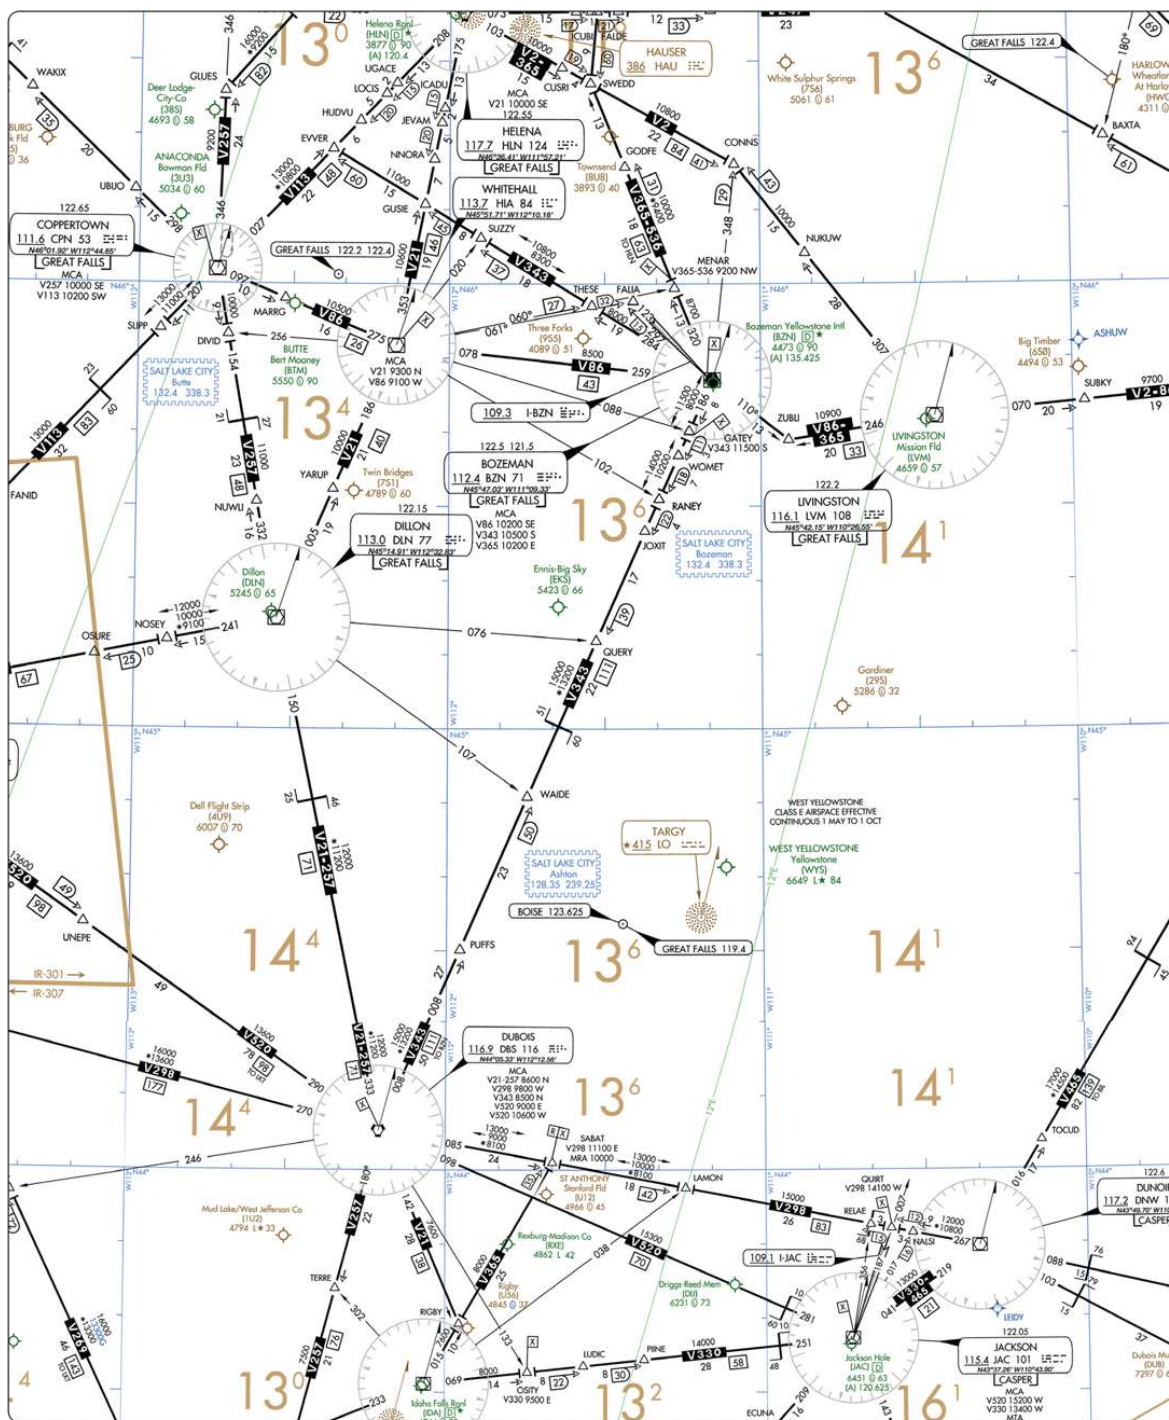


Figure 91. En Route Low-Altitude Chart Segment.
NOTE: Chart is not to scale and should not be used for navigation.
Chart is for testing purposes only.

©ASA



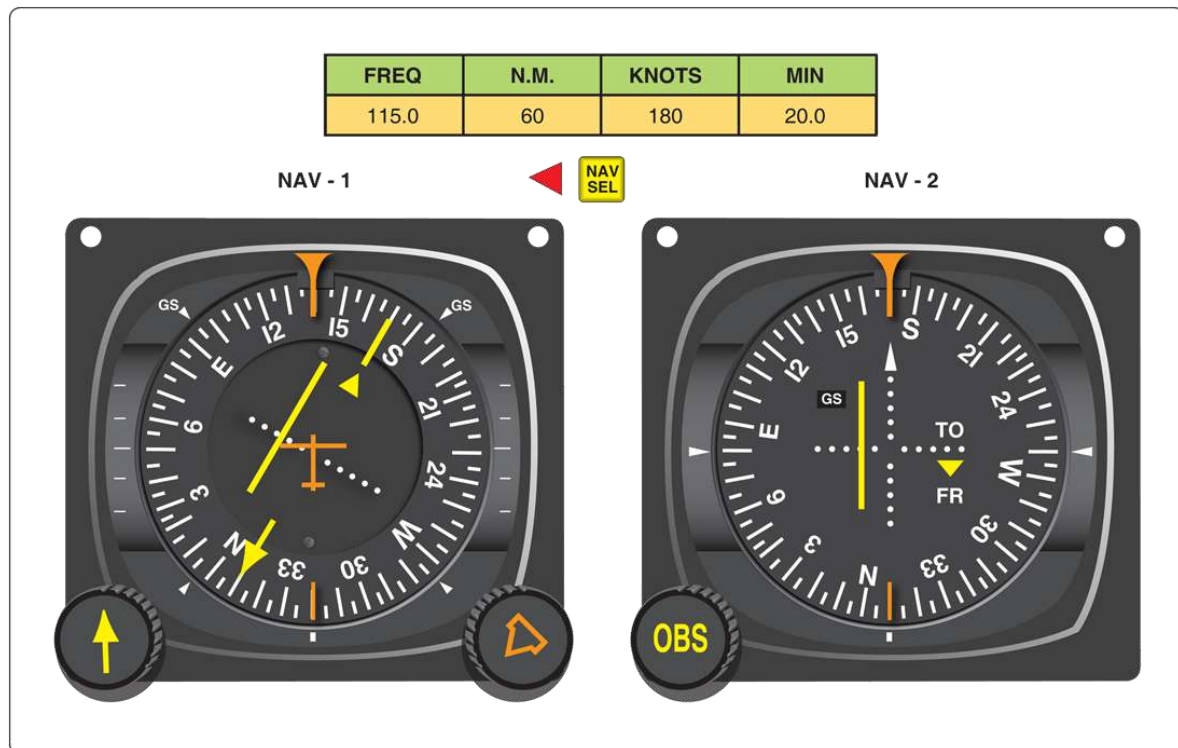


Figure 95. No. 1 and No. 2 NAV Presentation.

©ASA

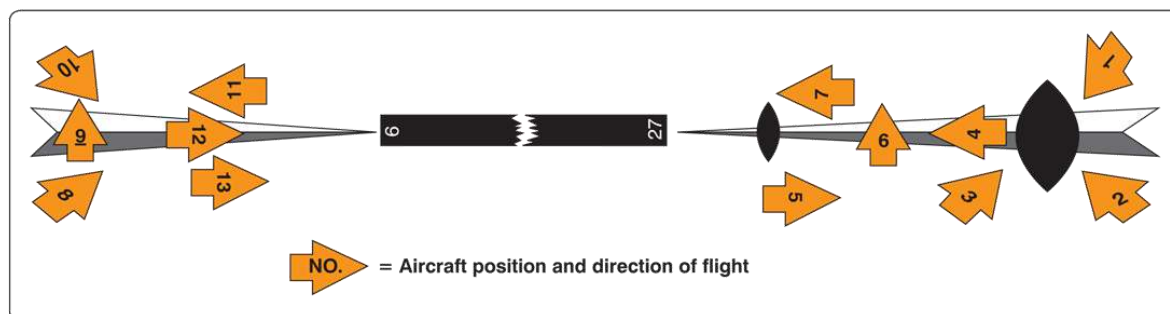


Figure 96. Aircraft Position and Direction of Flight.

©ASA



Figure 97. HSI Presentation.

©ASA


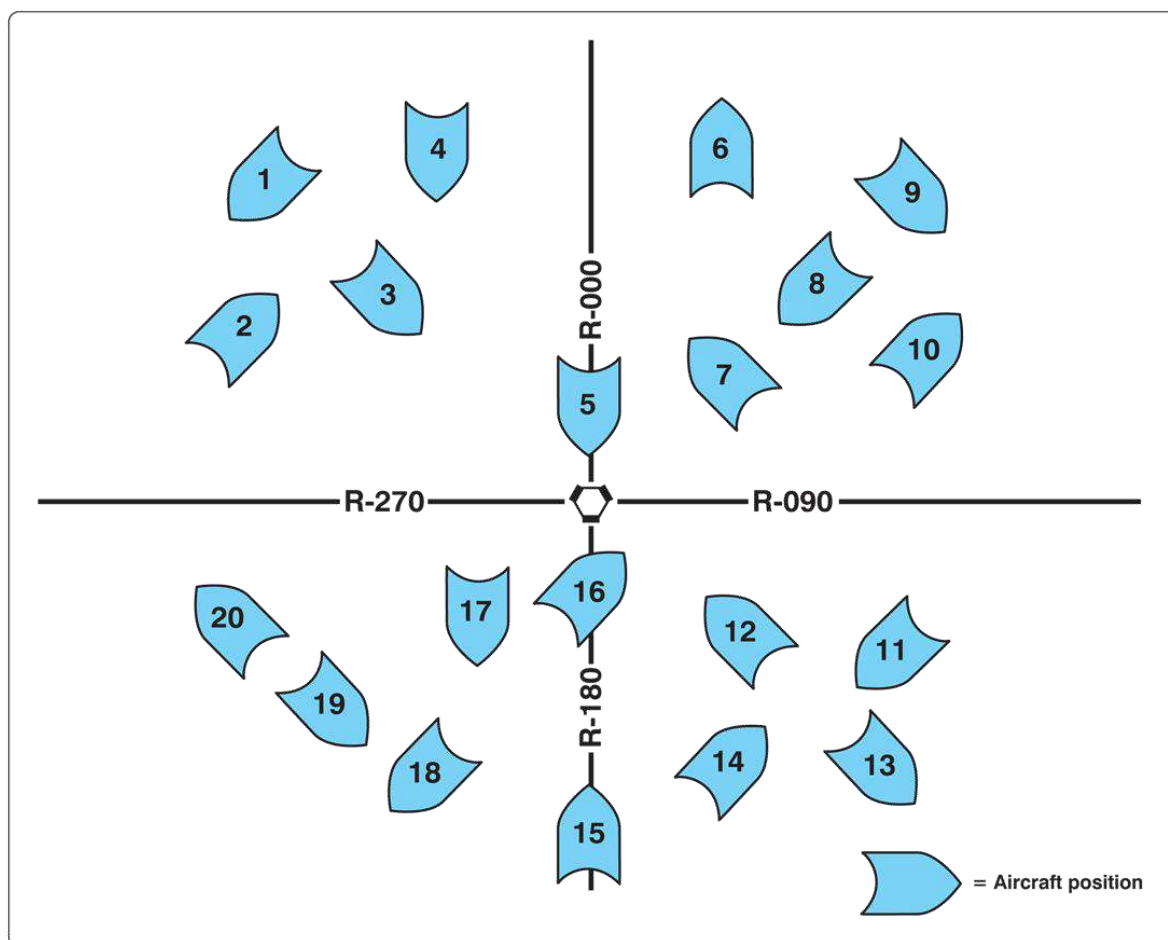


Figure 98. Aircraft Position.

©ASA



©ASA

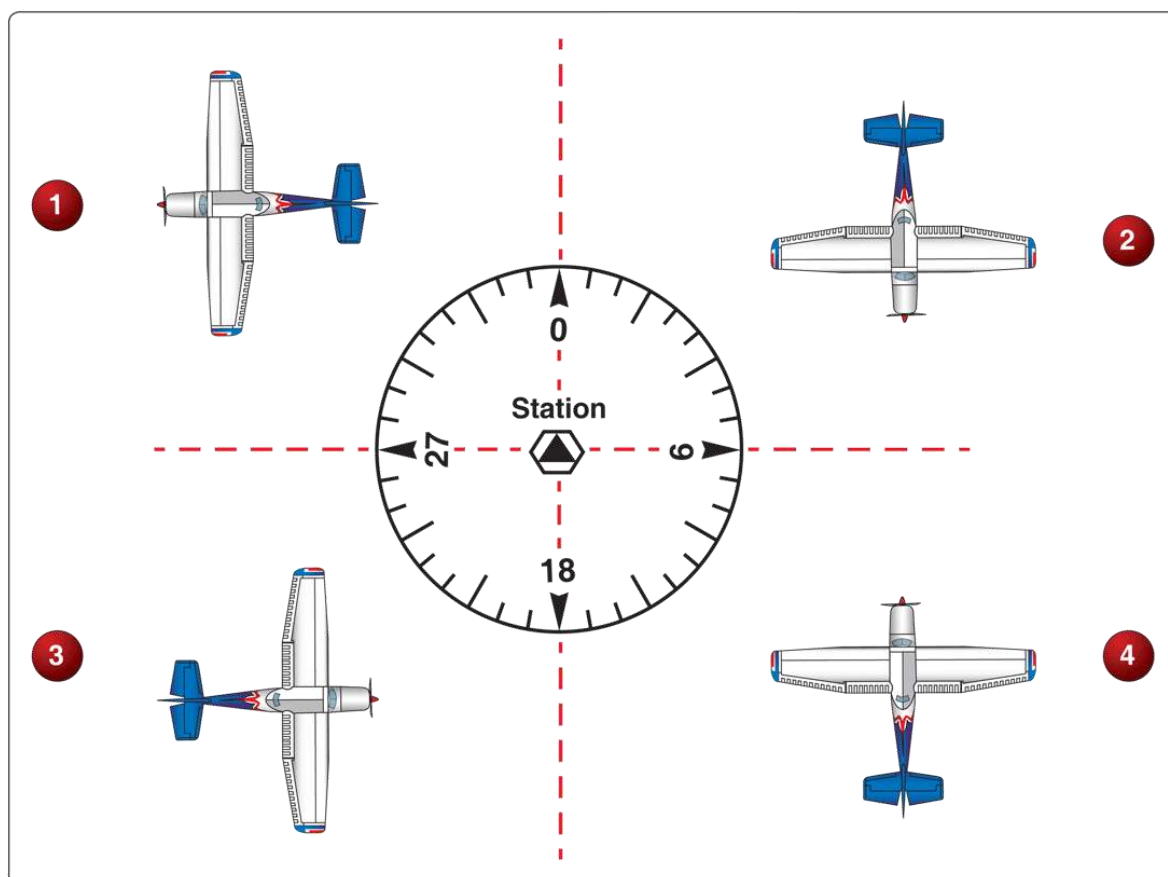


Figure 106. Aircraft Location Relative to VOR.

©ASA





Figure 110. CDI Direction from VORTAC.

©ASA



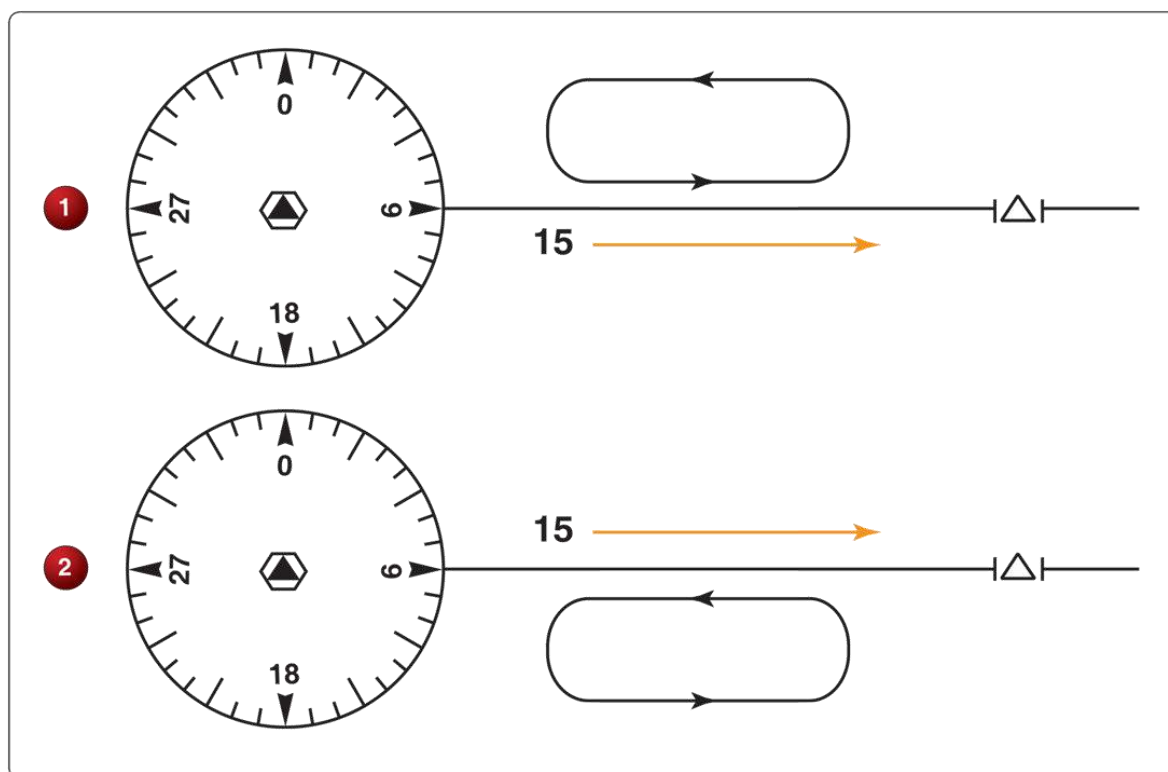


Figure 112. Holding Entry Procedure.

©ASA



Figure 113. Aircraft Course and DME Indicator. ©ASA



Figure 114. Aircraft Course and DME Indicator. ©ASA

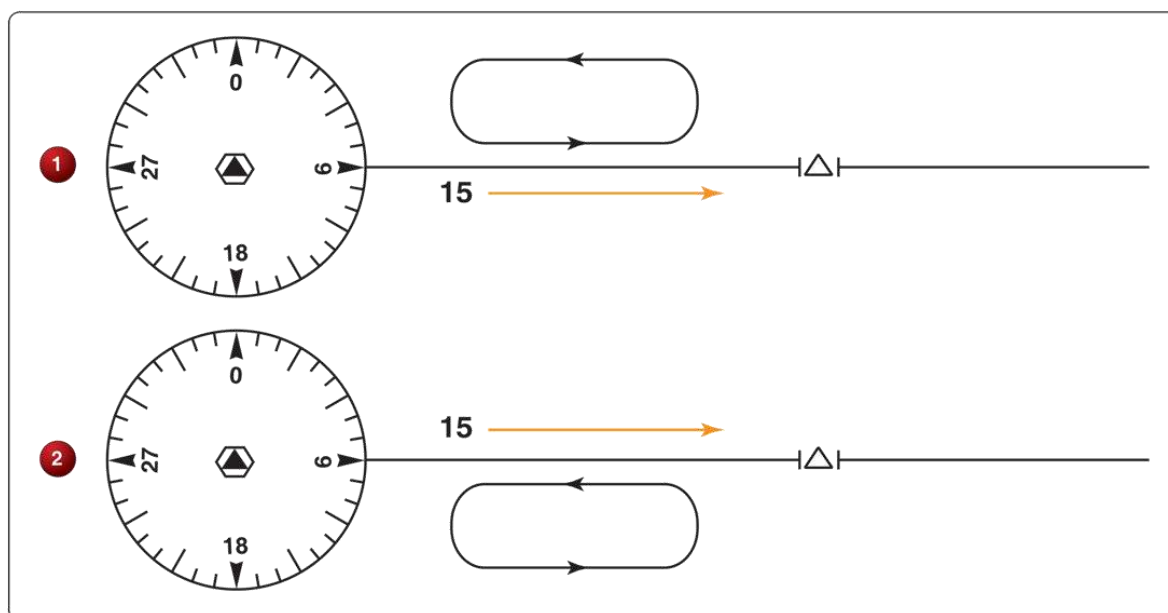


Figure 115. DME Fix with Holding Pattern.

©ASA

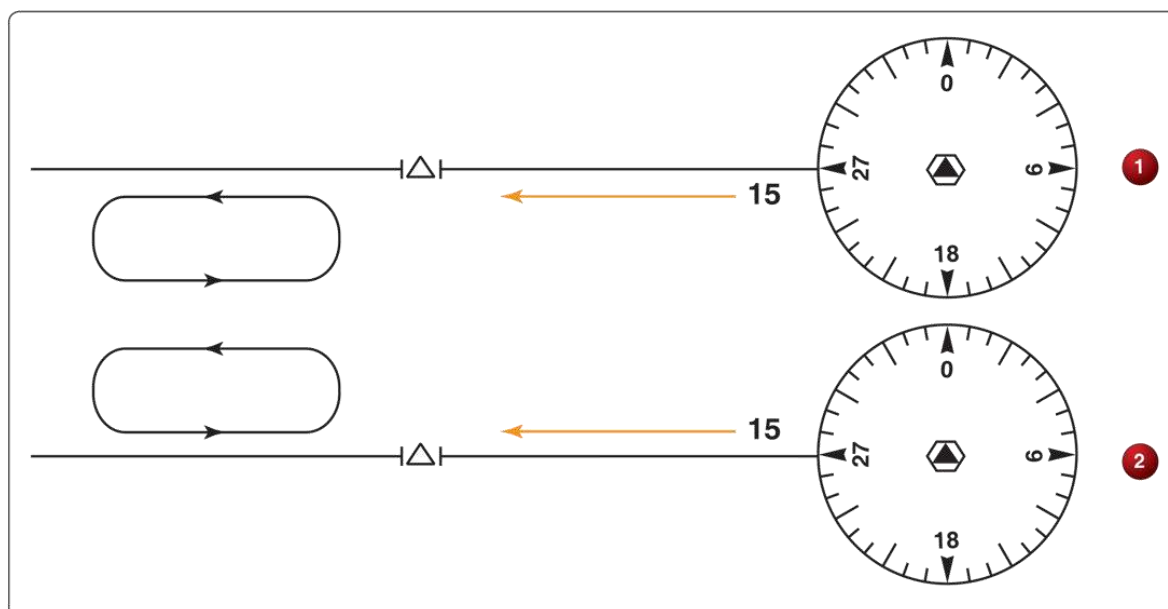


Figure 116. Holding Entry Procedure.

©ASA



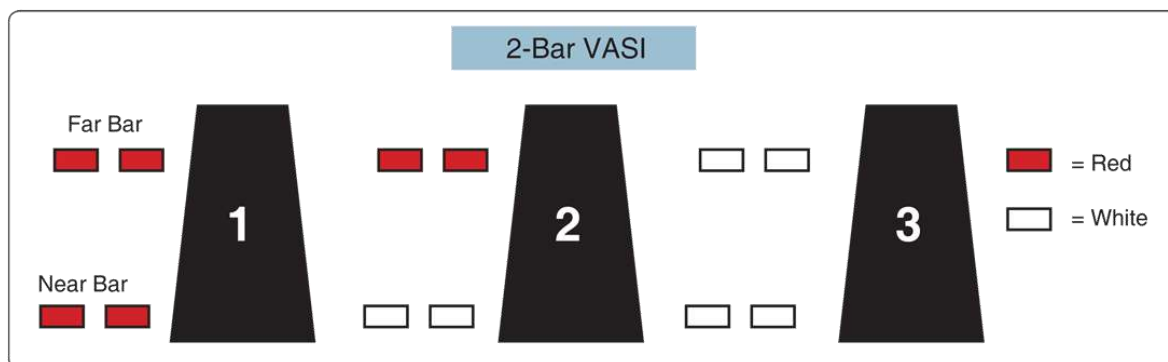


Figure 134. 2-BAR VASI.

©ASA

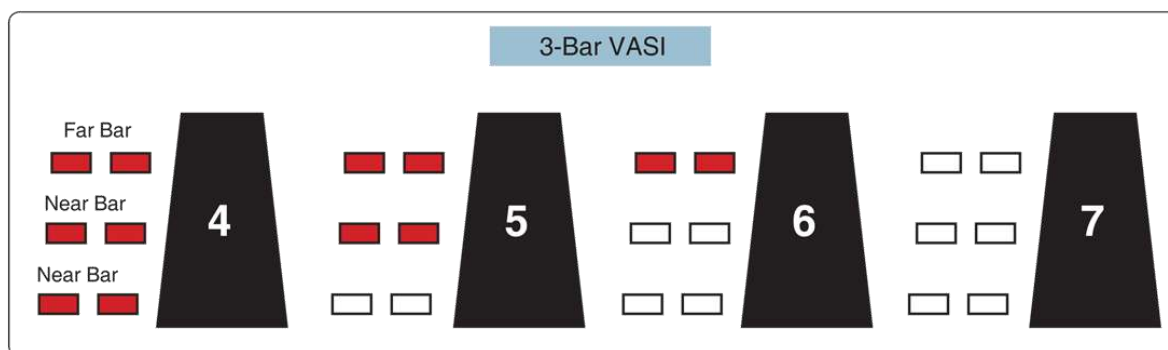


Figure 135. 3-BAR VASI.

©ASA

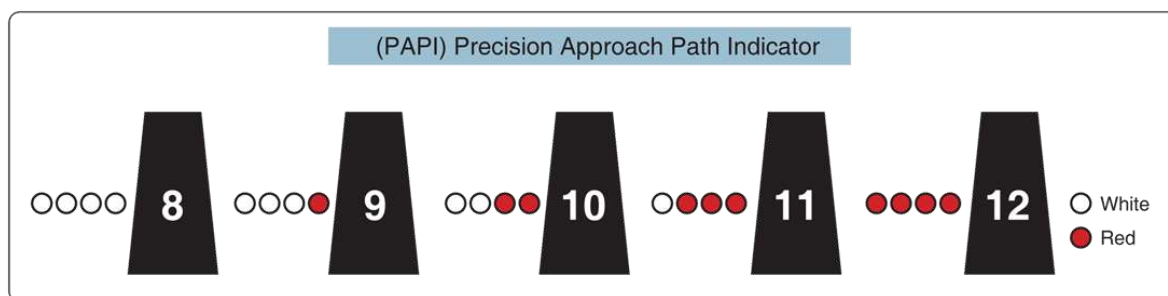


Figure 136. Precision Approach Path Indicator (PAPI).

©ASA

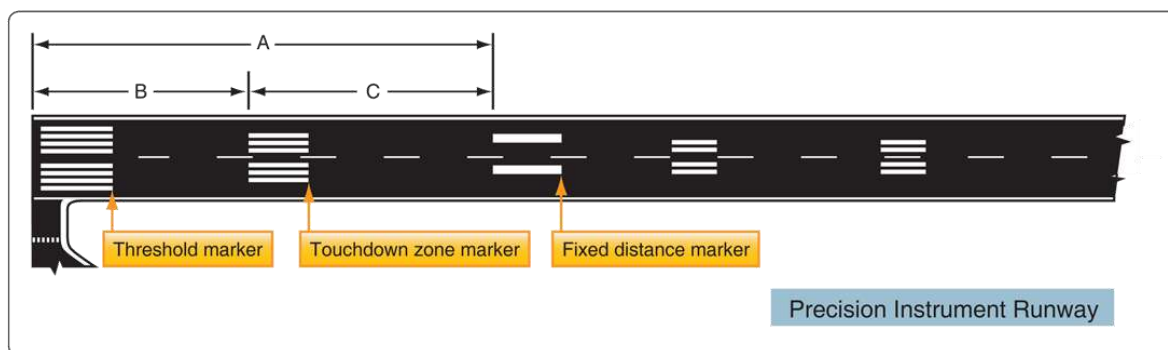


Figure 137. Precision Instrument Runway.

©ASA

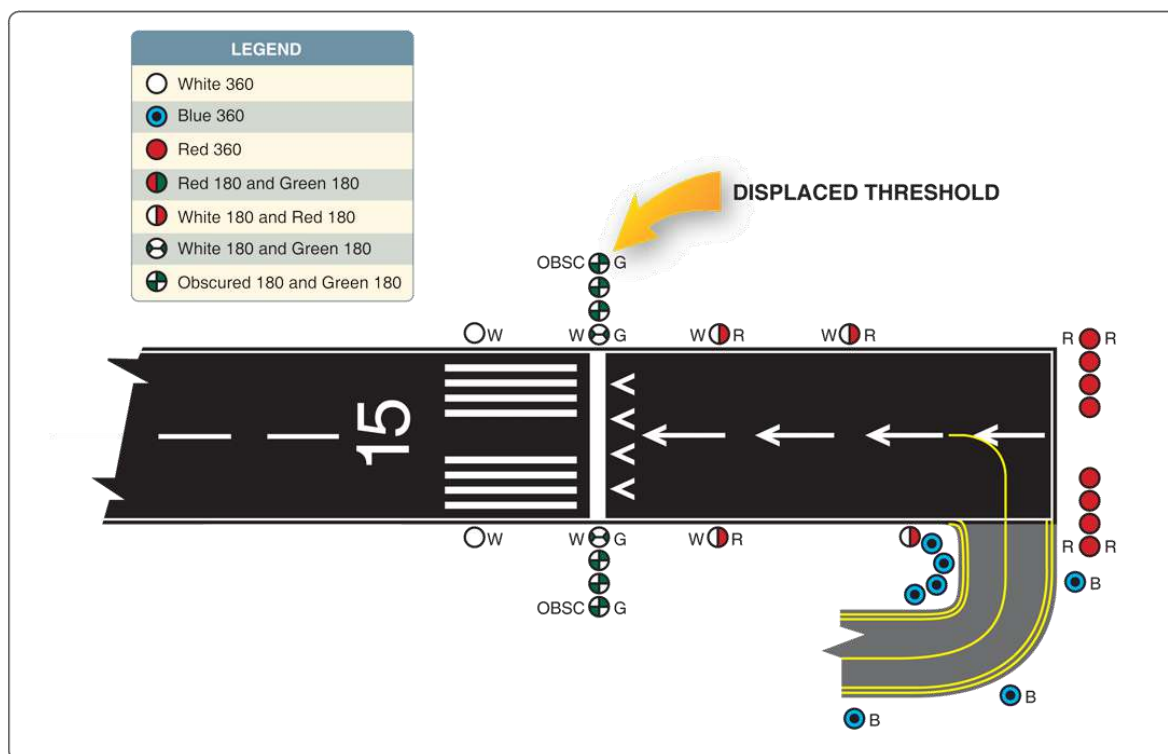


Figure 138. Runway Legend.

©ASA





Figure 140. OBS, ILS, and GS Displacement.

©ASA



Figure 141. OBS, ILS, and GS Displacement.

©ASA



Figure 142. OBS, ILS, and GS Displacement.

©ASA



Figure 144. Turn-and-Slip Indicator.

©ASA



Figure 145. Instrument Sequence (Unusual Attitude).

©ASA



Figure 146. Instrument Sequence (System Failed).

©ASA



Figure 147. Instrument Sequence (Unusual Attitude).

©ASA



Figure 148. Instrument Interpretation (System Malfunction).

©ASA



Figure 149. Instrument Interpretation (System Malfunction).

©ASA



Figure 150. Instrument Interpretation (Instrument Malfunction).

©ASA



Figure 151. Instrument Interpretation (Instrument Malfunction).

©ASA

(JNC6.JNC) 12320

SL-634 (FAA)

GRAND JUNCTION SIX DEPARTURE

GRAND JUNCTION RGNL (GJT)
GRAND JUNCTION, COLORADO

ATIS 118.55

GND CON 121.7 257.8


GRAND JUNCTION TOWER *

118.1 257.8

DENVER DEP CON *

119.7 317.4

UNICOM 122.95

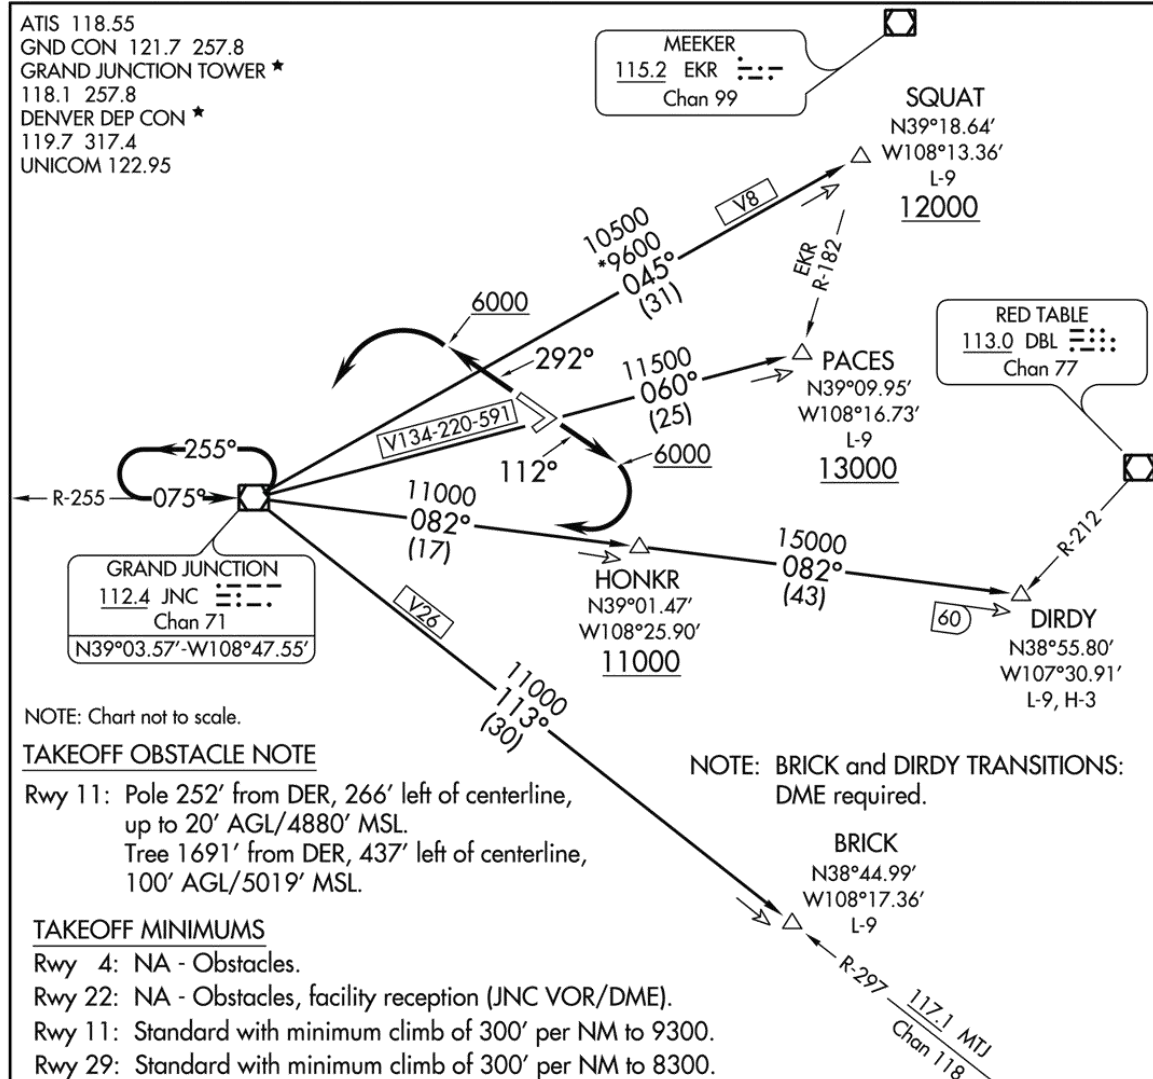

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 11: Climb heading 112° to 6000, then climbing right turn direct JNC VOR/DME, thence. . .

TAKEOFF RUNWAY 29: Climb heading 292° to 6000, then climbing left turn direct JNC VOR/DME, thence. . .

. . . on transition/route.

BRICK TRANSITION (JNC6.BRICK): From over JNC VOR/DME via JNC R-113 to BRICK/JNC 30 DME.

DIRDY TRANSITION (JNC6.DIRDY): From over JNC VOR/DME via JNC R-082 to DIRDY INT/JNC 60 DME.

PACES TRANSITION (JNC6.PACES): From over JNC VOR/DME via JNC R-060 to PACES INT/JNC 25 DME.

SQUAT TRANSITION (JNC6.SQUAT): From over JNC VOR/DME via JNC R-045 to SQUAT INT/JNC 31 DME.

GRAND JUNCTION SIX DEPARTURE

(JNC6.JNC) 12320

GRAND JUNCTION, COLORADO
GRAND JUNCTION RGNL (GJT)

Figure 155. Grand Junction Six Departure (JNC6.JNC).

©ASA

HOT SPOTS

An "airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.


A "hot spot" is a runway safety related problem area on an airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to: airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles or polygons designated as "HS 1", "HS 2", etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION*
ALAMOGORDO, NM HOLLOMAN AFB (HMN)	HS1	Twy R, Twy G, and Twy L have multiple hold lines for Rwy 07-25 and Rwy 04-22. Contact tower if confused or lost.
	HS2	Hold line on Twy /EOR A and Twy/EOR H have multiple POV access roads, possibility of high vehicle traffic.
	HS3	Hold line on Twy /EOR B and Twy C for Rwy 07-25 have multiple POV access roads, possibility of high vehicle traffic.
	HS4	Multiple hold lines at intersecting rwys. Landing/departing aircraft disregard hold lines, taxiing aircraft contact tower prior to crossing hold lines.
	HS5	Multiple hold lines where rwys intersect. Hold line also at Twy D. Contact tower if confused or lost.
	HS6	POV crossing controlled by tower. Hold line located on each side of Rwy 07-25. Possibility of high vehicular traffic.
ALBUQUERQUE, NM ALBUQUERQUE INTL SUNPORT (ABQ)	HS 1	Hold Position Marking on Twy E1 for Rwy 08 and Rwy 12.
	HS 2	Twy G1 from Cutter Aviation ramp and Rwy 12-30.
	HS 3	Complex int at Twy F, Twy C, Twy G. Twy G and Rwy 03-21
ASPEN, CO ASPEN-PITKIN COUNTY / SARDY FIELD (ASE)	HS 1	Twy A2. Short taxi distance from ramp to rwy.
	HS 2	Twy A3. Short taxi distance from ramp to rwy.
	HS 3	Twy A4. Short taxi distance from ramp to rwy.
COLORADO SPRINGS, CO CITY OF COLORADO SPRINGS (COS)	HS 1	The apch ends of Rwy 13 and Rwy 17R; and Twy A1.
	HS 2	Twy A4 and Twy G at Rwy 17R-35L.
	HS 3	Int of Twy E4, Twy G, Twy H and Twy E.
	HS 4	Apch ends of Rwy 35R and Rwy 35L.
DENVER, CO CENTENNIAL (APA)	HS 1	Rwy 17L at Twy A1.
	HS 2	Twy A, Twy A8, Twy A9 and Twy C1 congested INT.
	HS 3	Twy C1 and Twy D1 close proximity to Rwy 10.
DENVER, CO DENVER INTL (DEN)	HS 1	Rwy 35L hold signs may not be visible from Twy SC or Twy A until entering Twy M, pilots sometimes enter Rwy 35L without authorization.
	HS 2	Rwy 17R Apch Hold Position.
DENVER, CO ROCKY MOUNTAIN METROPOLITAN (BJC)	HS 1	Frequent helicopter operations.
	HS 2	Multiple hold lines in close proximity. Hold line on Twy B south of Rwy 11R-29L is prior to Twy D.
EAGLE, CO EAGLE COUNTY RGNL (EGE)	HS 1	High density parking area.
GRAND JUNCTION, CO GRAND JUNCTION RGNL (GJT)	HS 1	Rwy 22 and Rwy 29 close proximity, wrong rwy departure risk.

GRAND JUNCTION, COLORADO

AL-634 (FAA)

13150

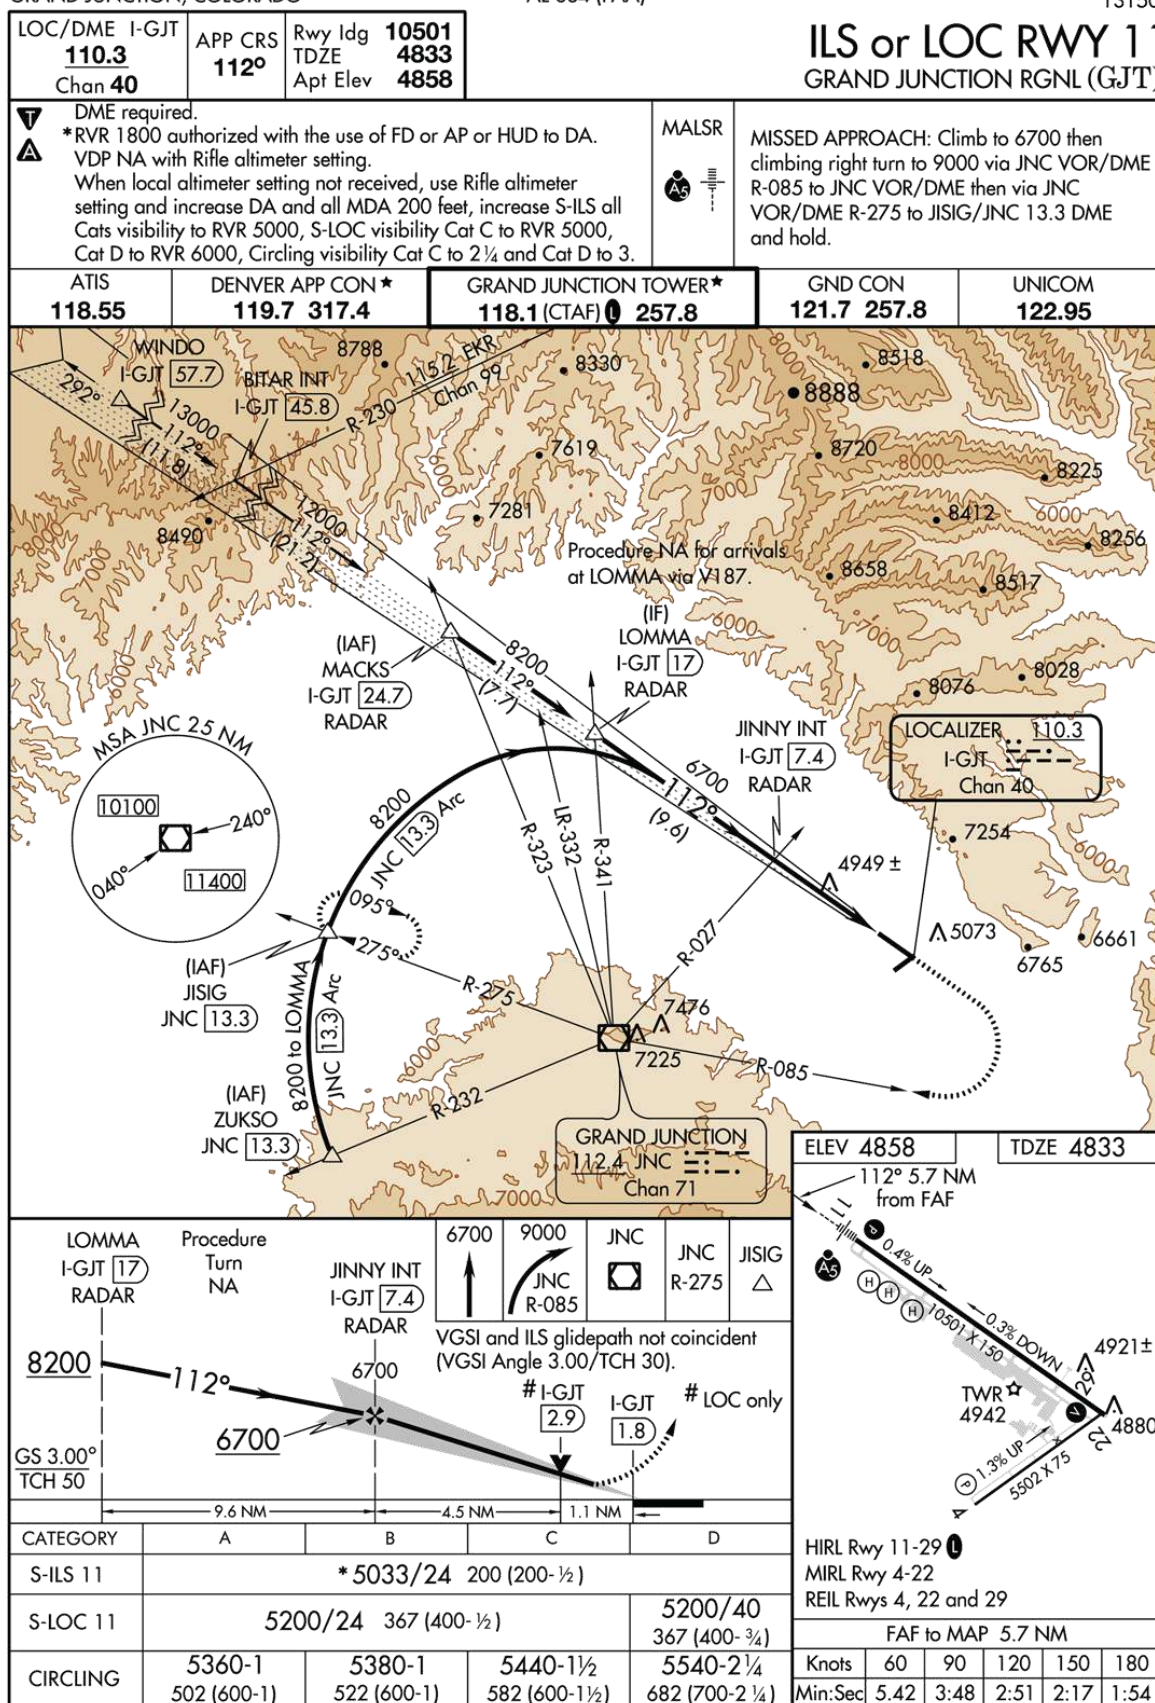

GRAND JUNCTION, COLORADO

Amdt 16A 30MAY13

39°07'N-108°32'W

GRAND JUNCTION RGNL (GJT)

ILS or LOC RWY 11


Figure 157. ILS RWY 11 (GJT).

©ASA

GRAND JUNCTION, COLORADO

AL-634 (FAA)

13150

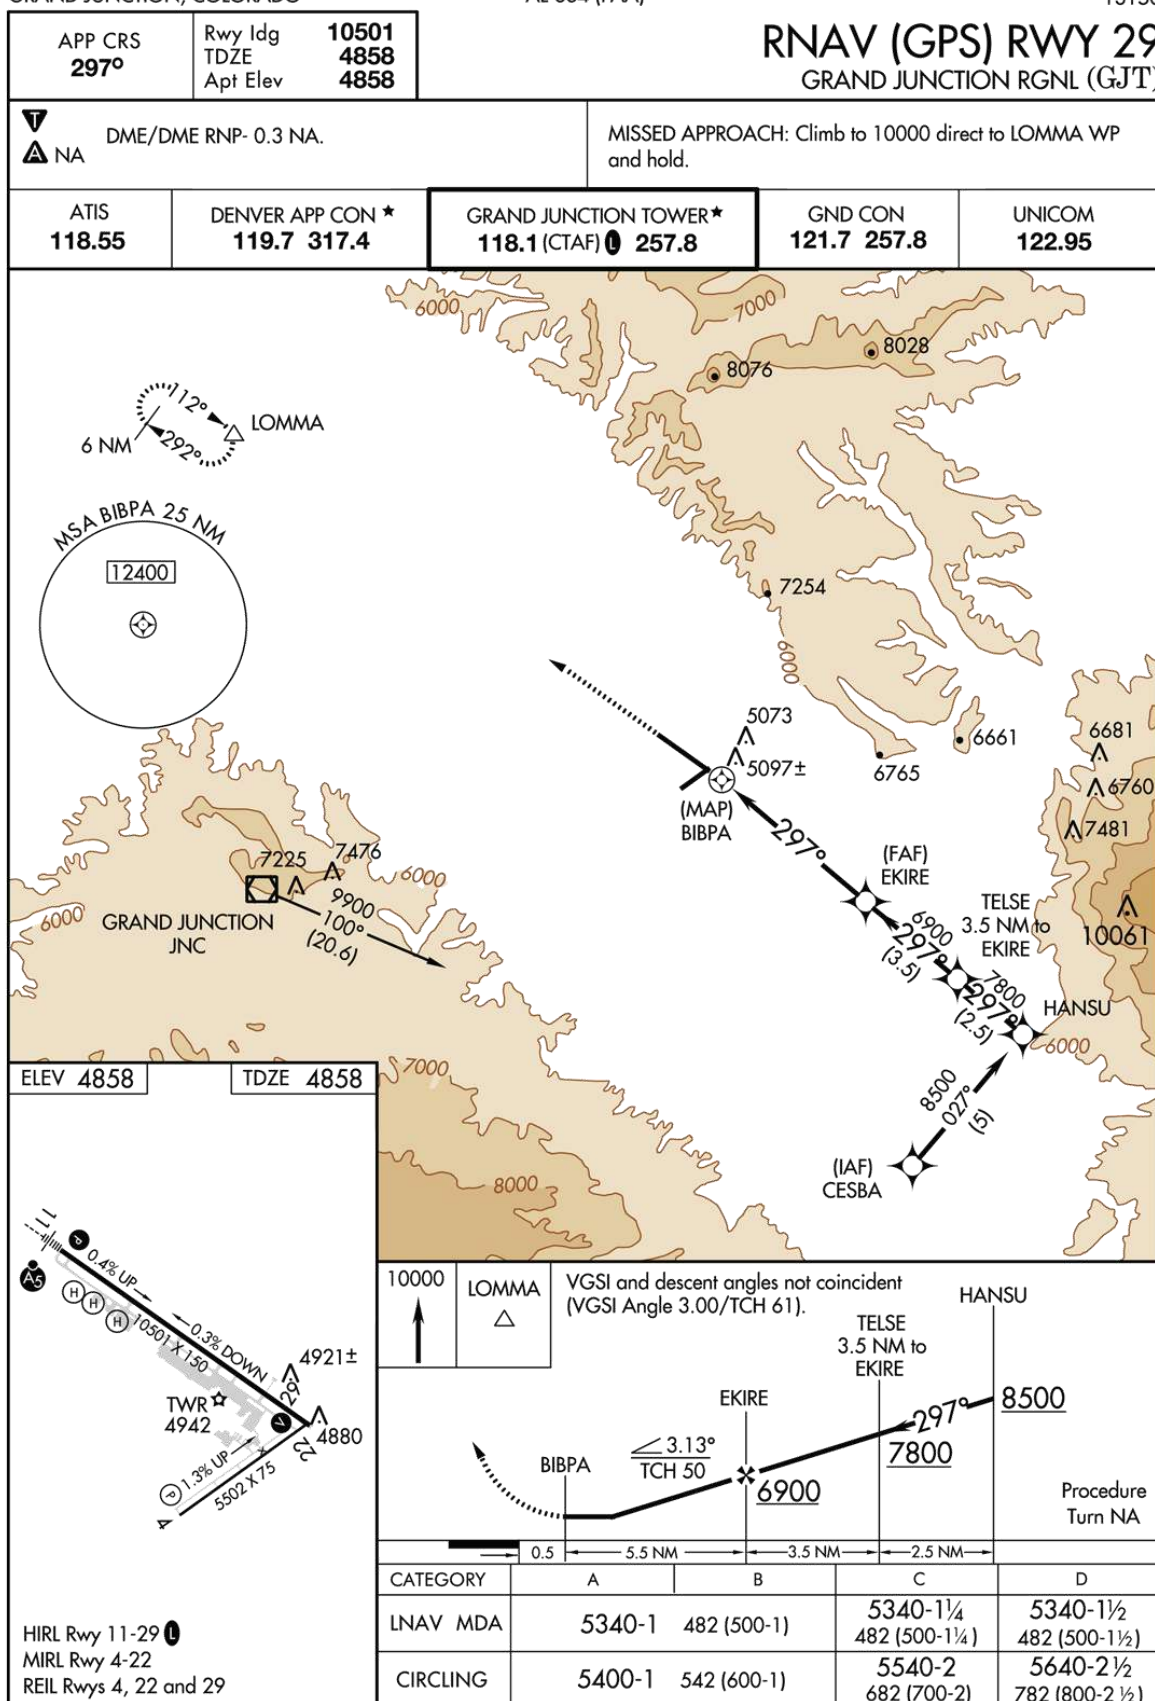

GRAND JUNCTION, COLORADO

Amdt 1B 30MAY13

39°07'N-108°32'W


GRAND JUNCTION RGNL (GJT)
RNAV (GPS) RWY 29

Figure 158. ILS RWY 11 (GJT).

©ASA

DURANGO, COLORADO

AL-480 (FAA)

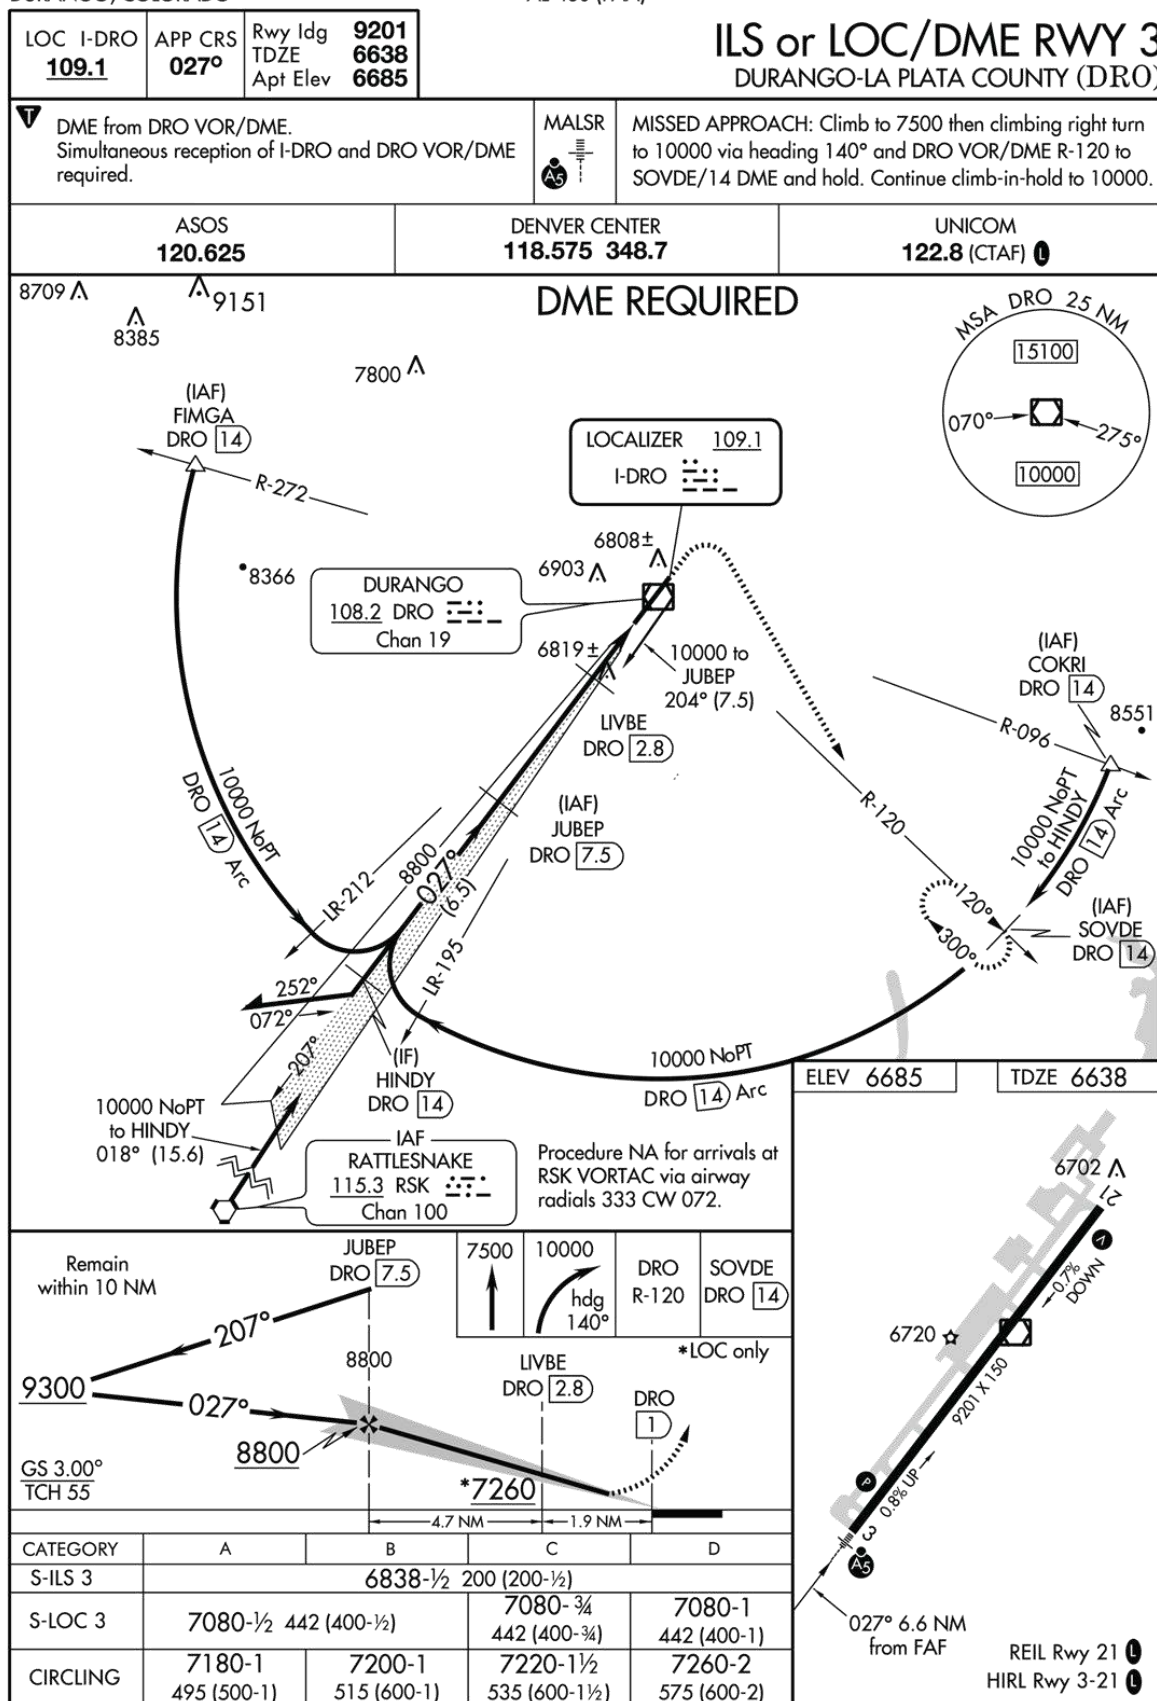

DURANGO, COLORADO
Amdt 4 12096

37°09'N-107°45'W

DURANGO-LA PLATA COUNTY (DRO)
ILS or LOC/DME RWY 3


Figure 159. ILS/DME RWY 3 (DRO).

©ASA

EUGENE, OREGON

AL-140 (FAA)

13290

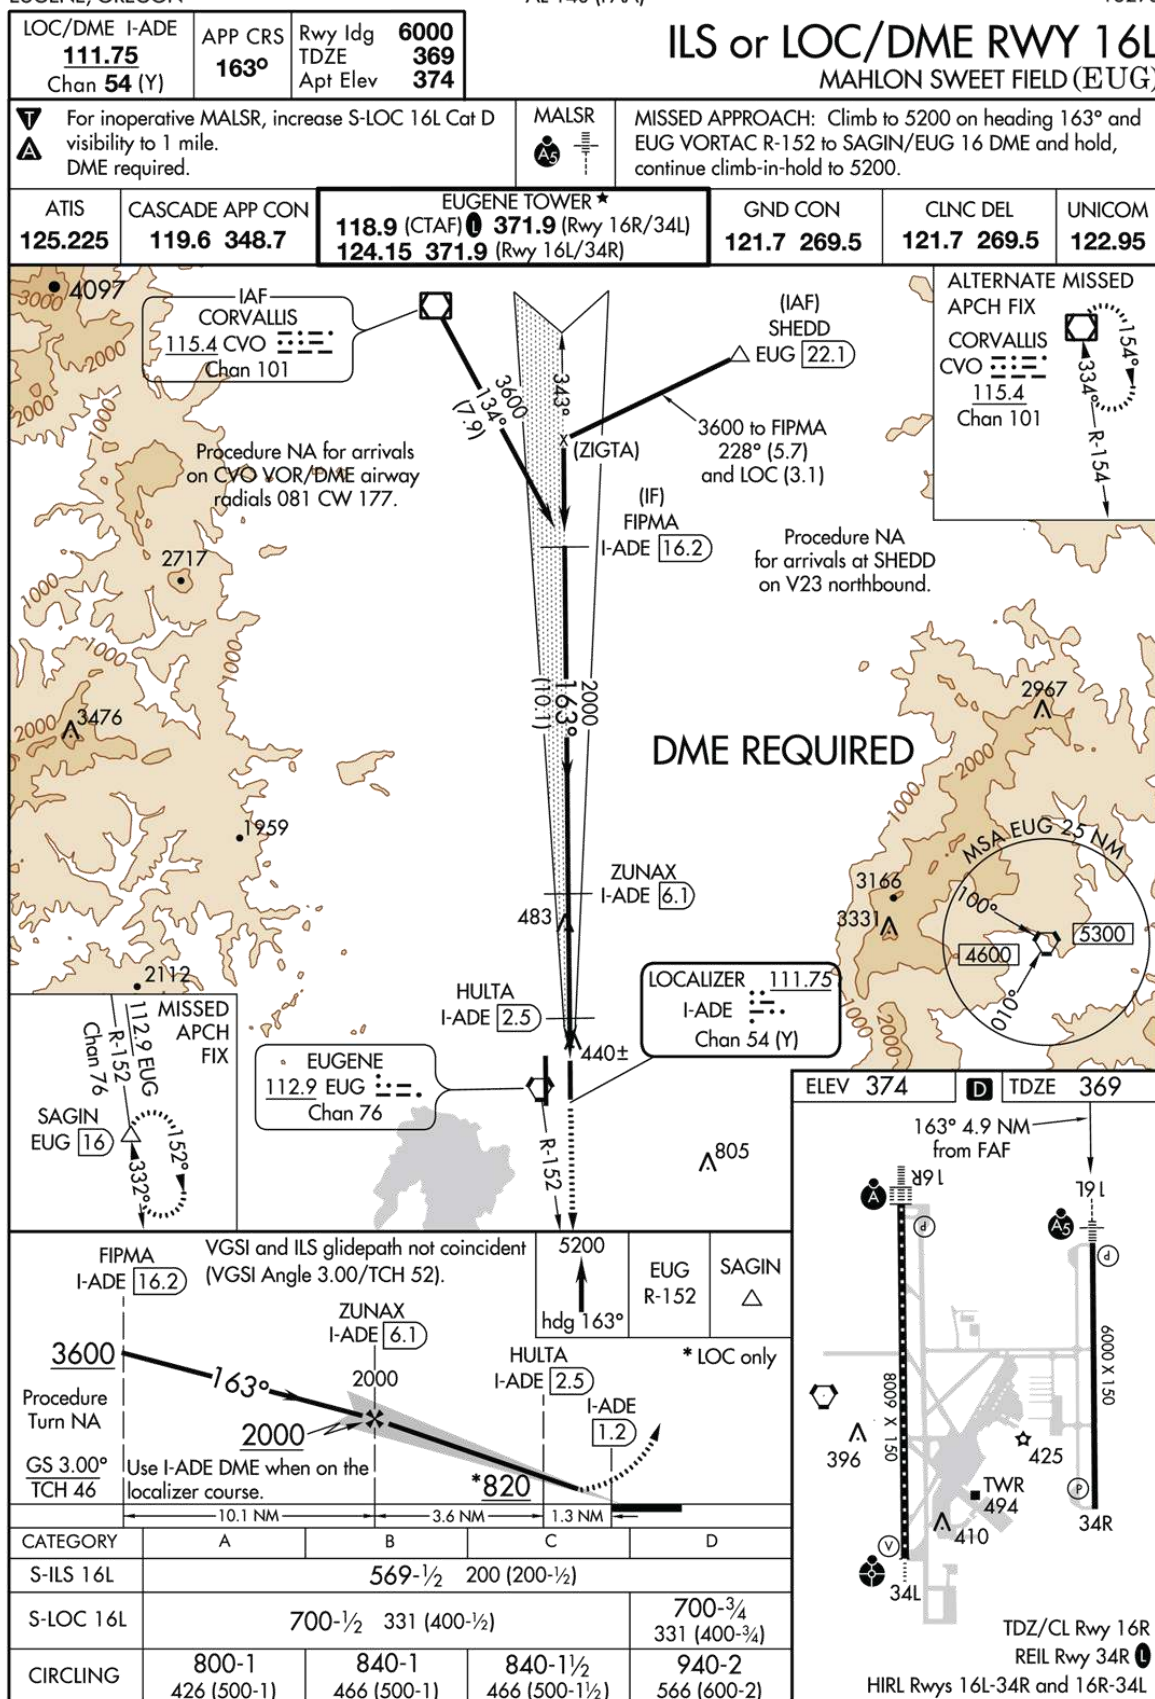

EUGENE, OREGON

Amdt 1 23SEP10

44°07'N-123°13'W

MAHLON SWEET FIELD (EUG)

ILS or LOC/DME RWY 16L


Figure 160. ILS or LOC/DME RWY 16L (EUG).

©ASA

EUGENE, OREGON

AL-140 (FAA)

13290

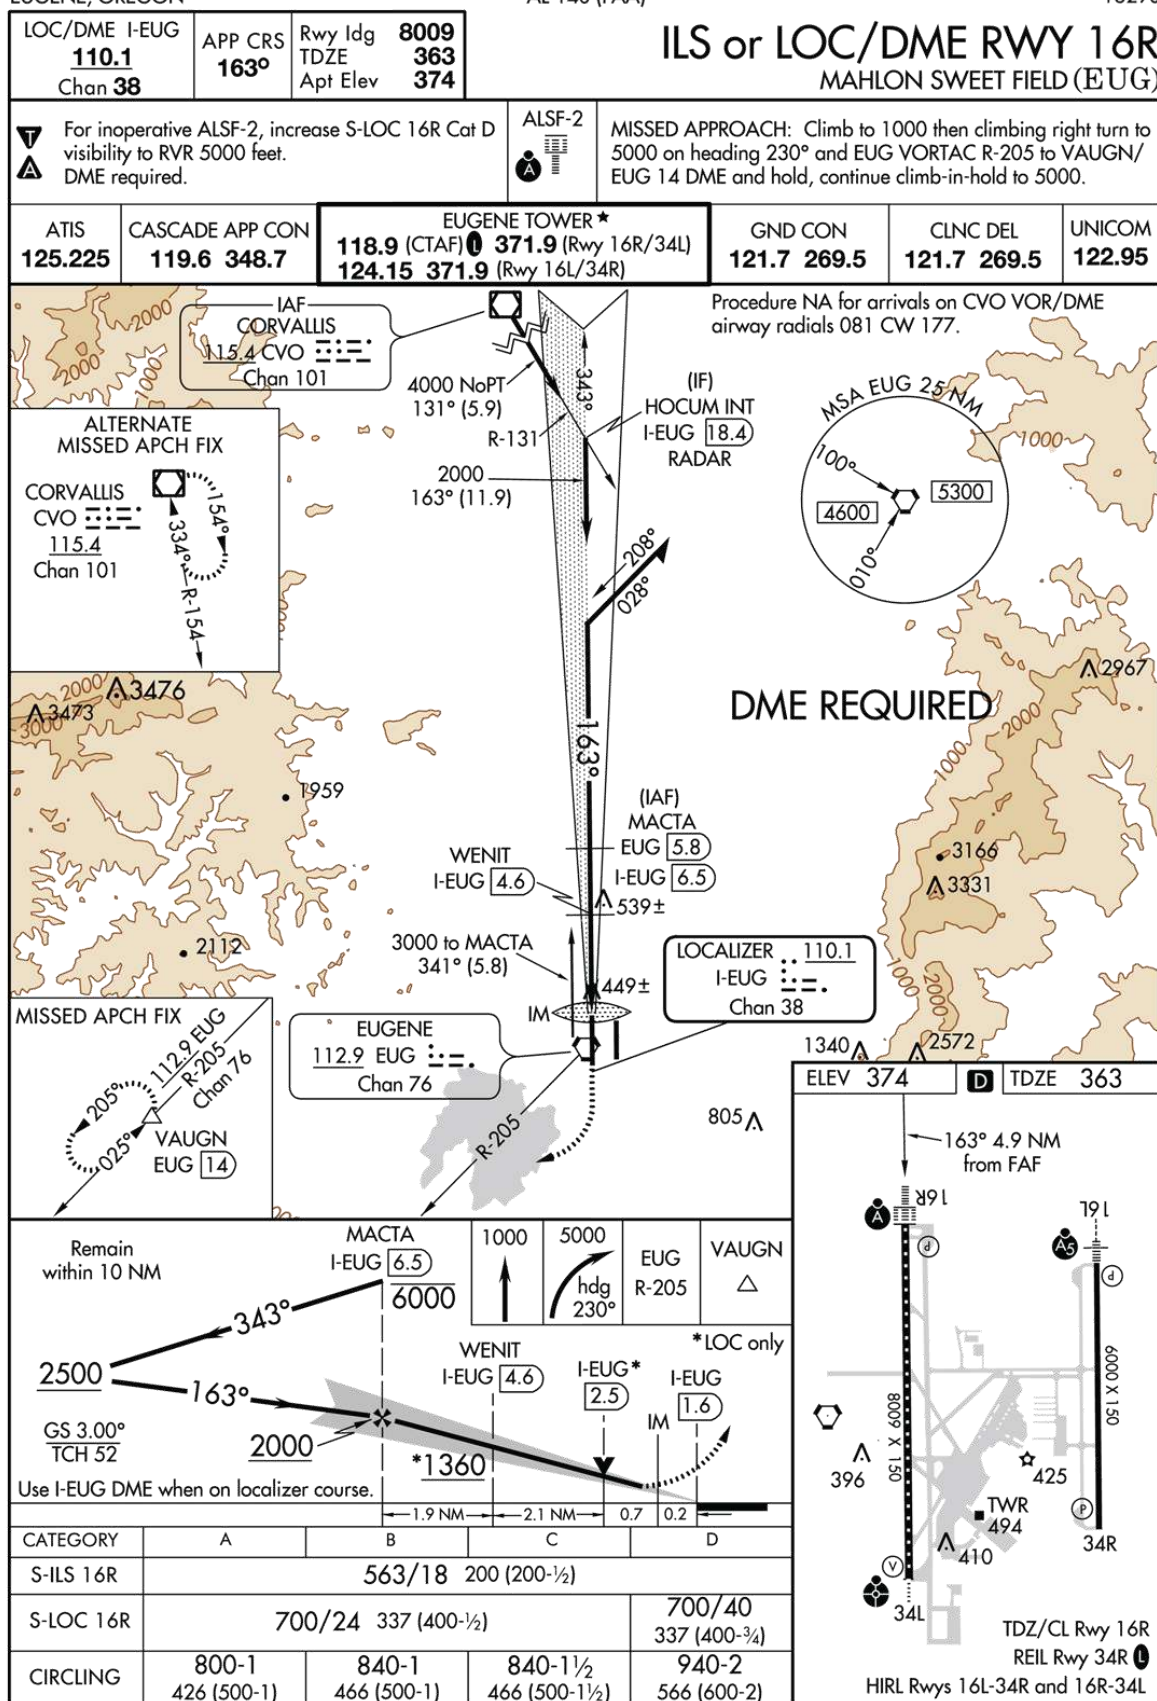

EUGENE, OREGON

Amdt 36 23SEP10

44°07'N-123°13'W

MAHLON SWEET FIELD (EUG)

ILS or LOC/DME RWY 16R

Figure 161. ILS or LOC/DME RWY 16R (EUG).

©ASA

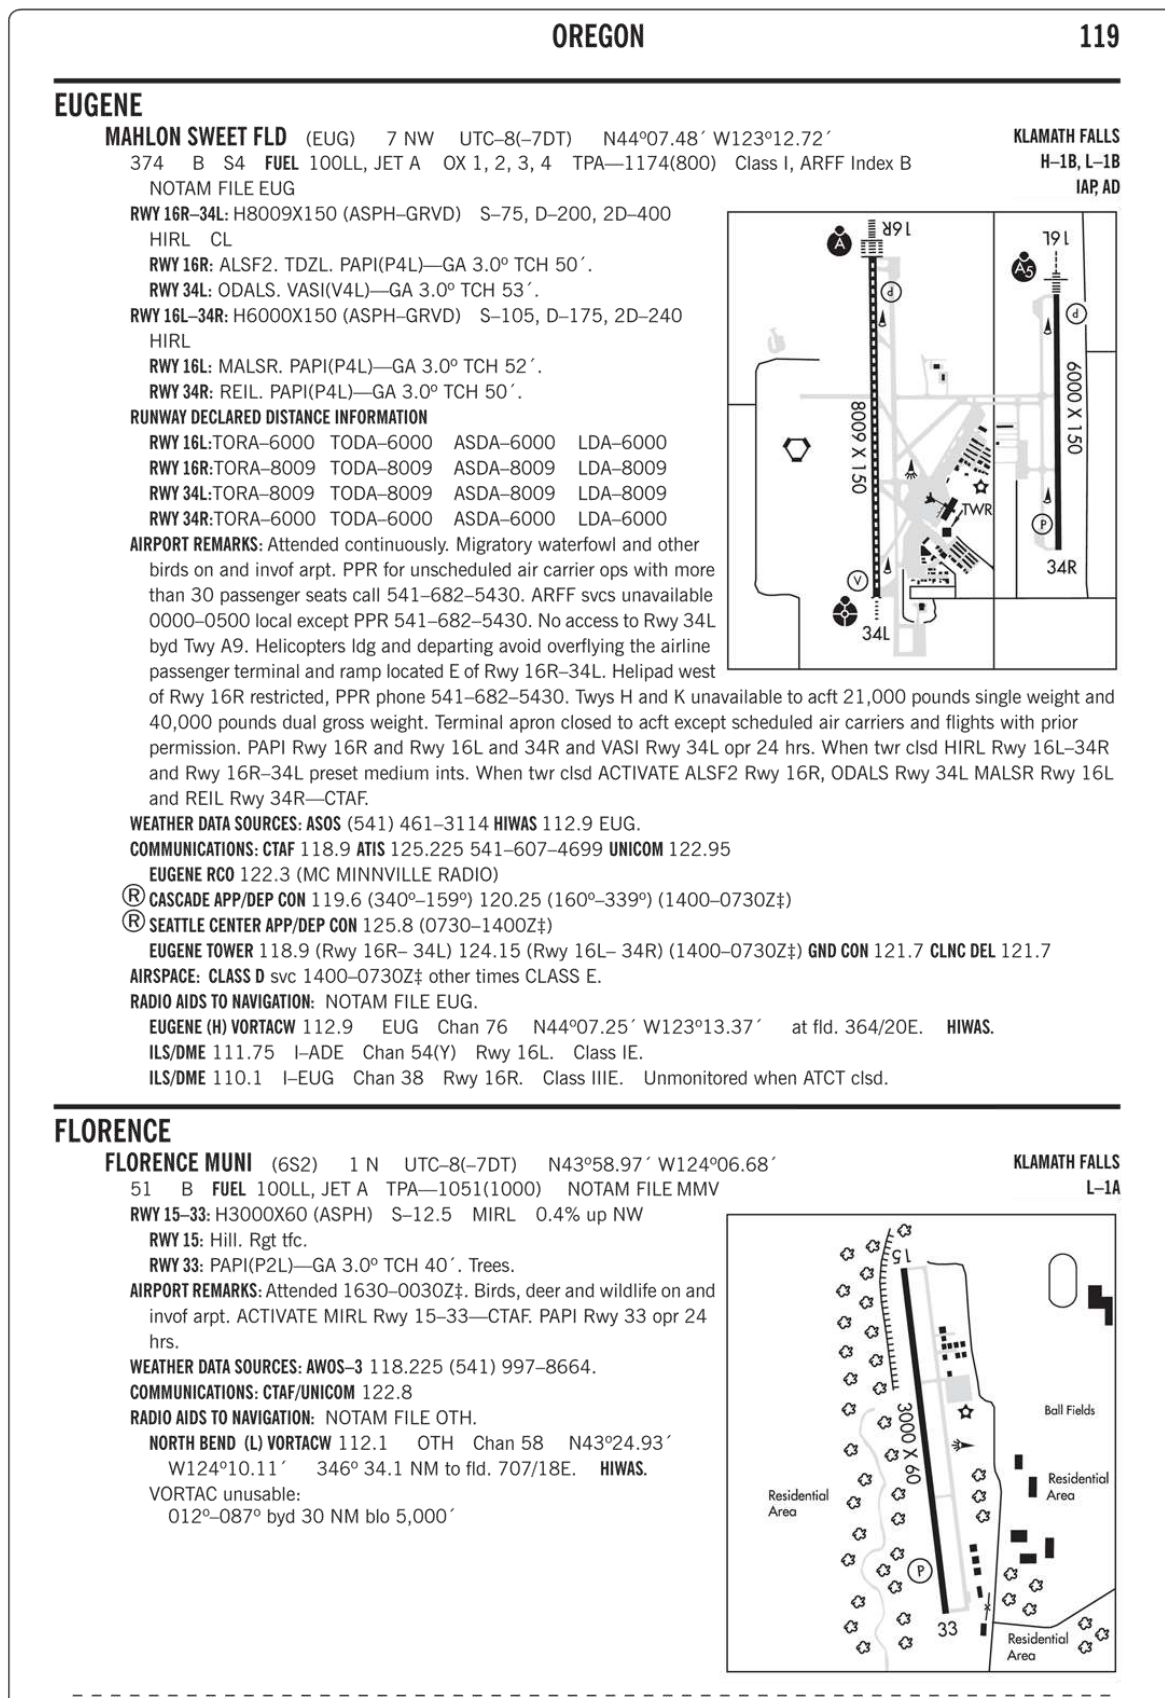



Figure 162. Excerpt from Chart Supplement.

©ASA

(GNATS6.GNATS) 13290
GNATS SIX DEPARTURE

SL-251 (FAA)

ROGUE VALLEY INTL-MEDFORD (MFR)
MEDFORD, OREGON

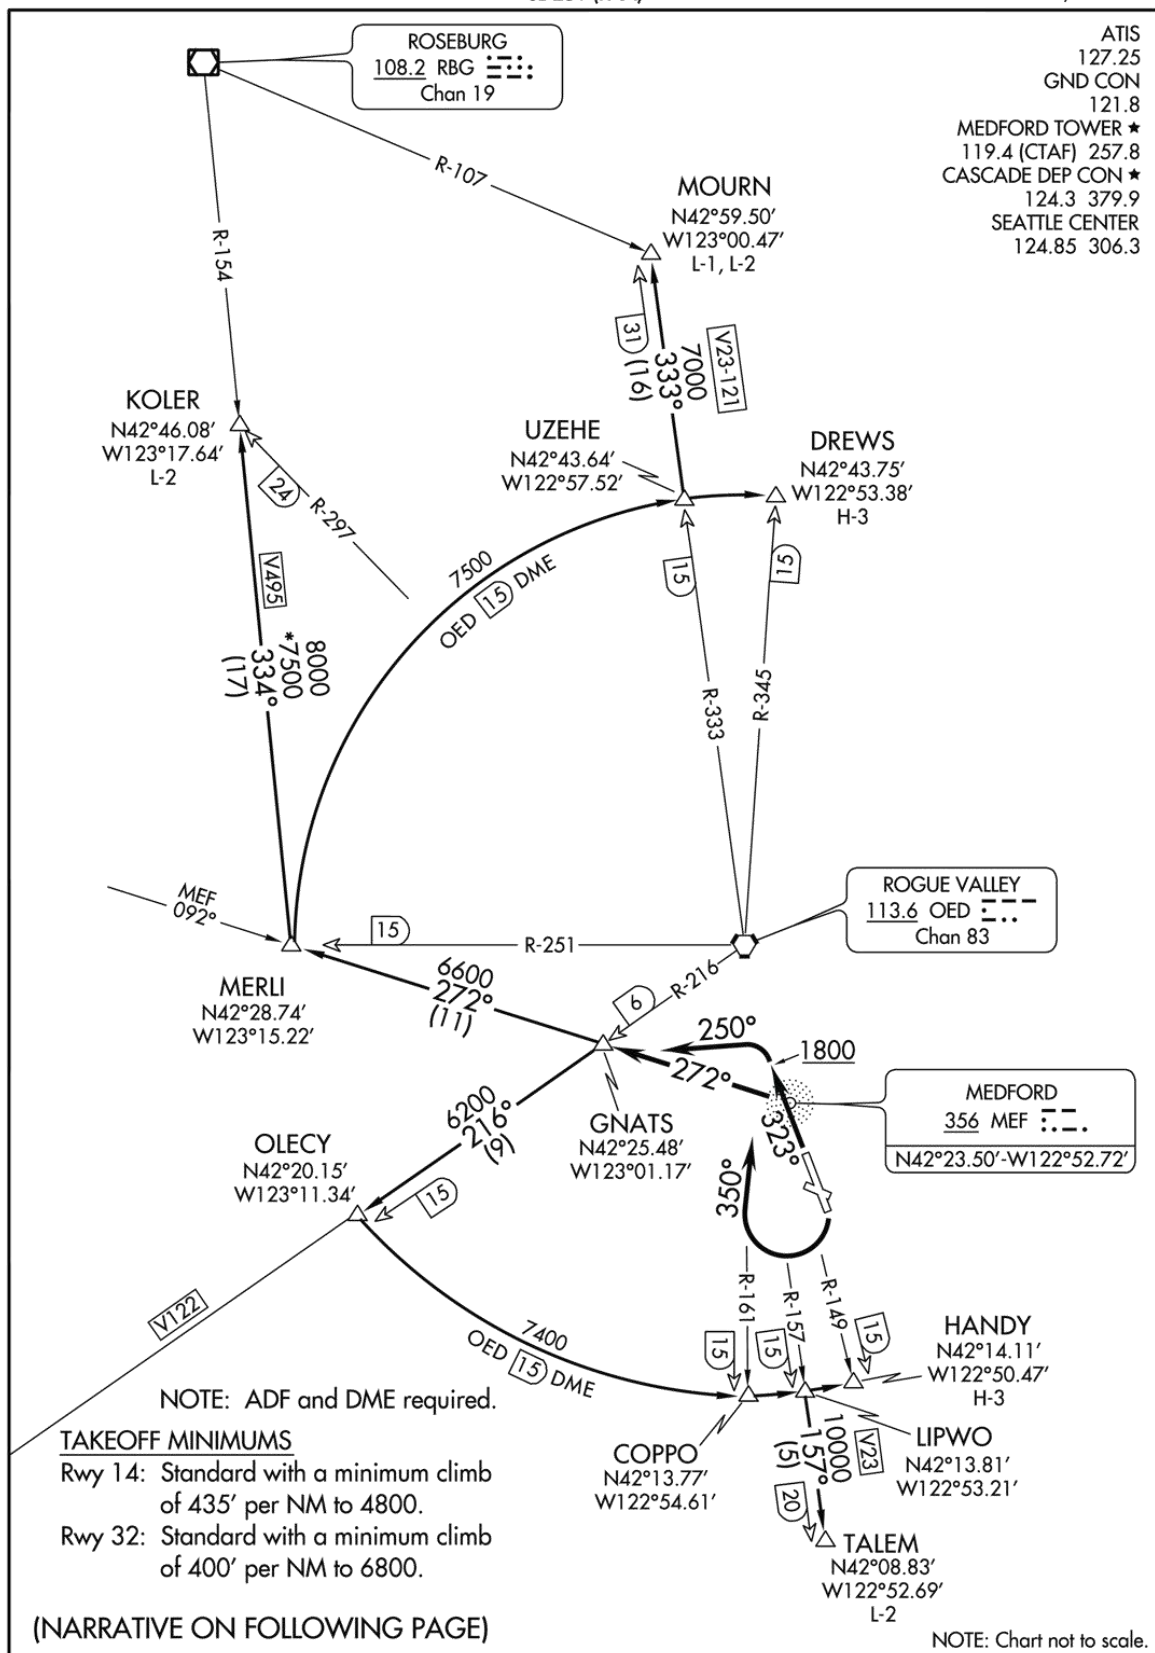

GNATS SIX DEPARTURE
(GNATS6.GNATS) 13290

MEDFORD, OREGON
ROGUE VALLEY INTL-MEDFORD (MFR)

Figure 163. GNATS Six Departure (GNATS6.GNATS).

©ASA

(GNATS6.GNATS) 13290
GNATS SIX DEPARTURE

SL-251 (FAA)

ROGUE VALLEY INTL-MEDFORD (MFR)
MEDFORD, OREGON



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 14: Climbing right turn on heading 350° to intercept bearing 272° from MEF NDB to GNATS INT. Thence

TAKEOFF RUNWAY 32: Climb on heading 323° to 1800 then climbing left turn on heading 250° to intercept bearing 272° from MEF NDB to GNATS INT. Thence

. . . . via (transition) or (assigned route). Maintain 11 000 or assigned lower altitude.

COPPO TRANSITION (GNATS6.COPPO): From over GNATS INT via OED VORTAC R-216 to OLECY DME, then via the OED VORTAC 15 DME Arc CCW to COPPO DME.

DREWS TRANSITION (GNATS6.DREWS): From over GNATS INT via MEF NDB 272° to MERLI INT, then via the OED VORTAC 15 DME Arc CW to DREWS DME.

HANDY TRANSITION (GNATS6.HANDY): From over GNATS INT via the OED VORTAC R-216 to OLECY DME, then via the OED VORTAC 15 DME Arc CCW to HANDY DME.

KOLER TRANSITION (GNATS6.KOLER): From over GNATS INT via MEF NDB 272° to MERLI INT, then via RBG VOR/DME R-154 to KOLER INT.

MOURN TRANSITION (GNATS6.MOURN): From over GNATS INT via MEF NDB 272° to MERLI INT, then via the OED VORTAC 15 DME Arc CW to UZEHE DME, then via OED VORTAC R-333 to MOURN INT.

TALEM TRANSITION (GNATS6.TALEM): From over GNATS INT via OED VORTAC R-216 to OLECY DME, then via the OED VORTAC 15 DME Arc CCW to LIPWO DME, then via OED VORTAC R-157 to TALEM DME.

GNATS SIX DEPARTURE
(GNATS6.GNATS) 13290

MEDFORD, OREGON
ROGUE VALLEY INTL-MEDFORD (MFR)

Figure 164. GNATS Six Departure (GNATS6.GNATS).

©ASA

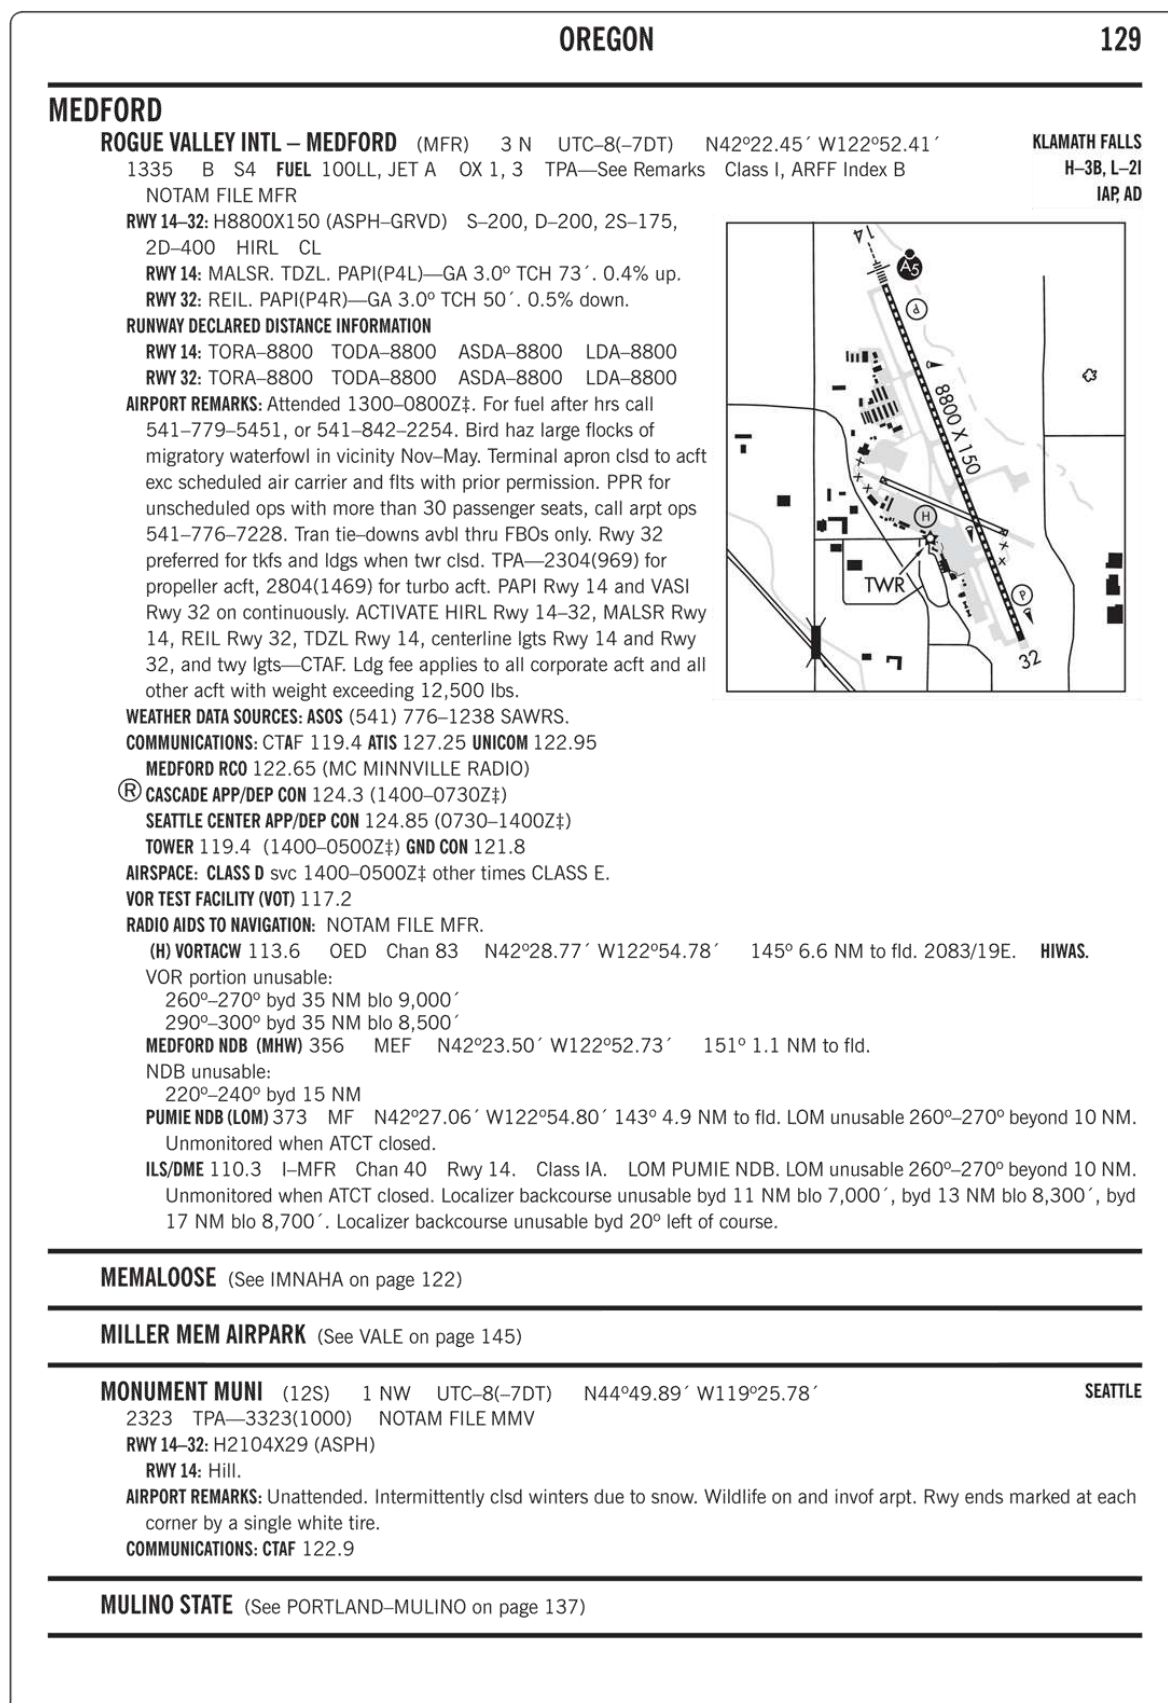


Figure 165. Excerpt from Chart Supplement.

©ASA

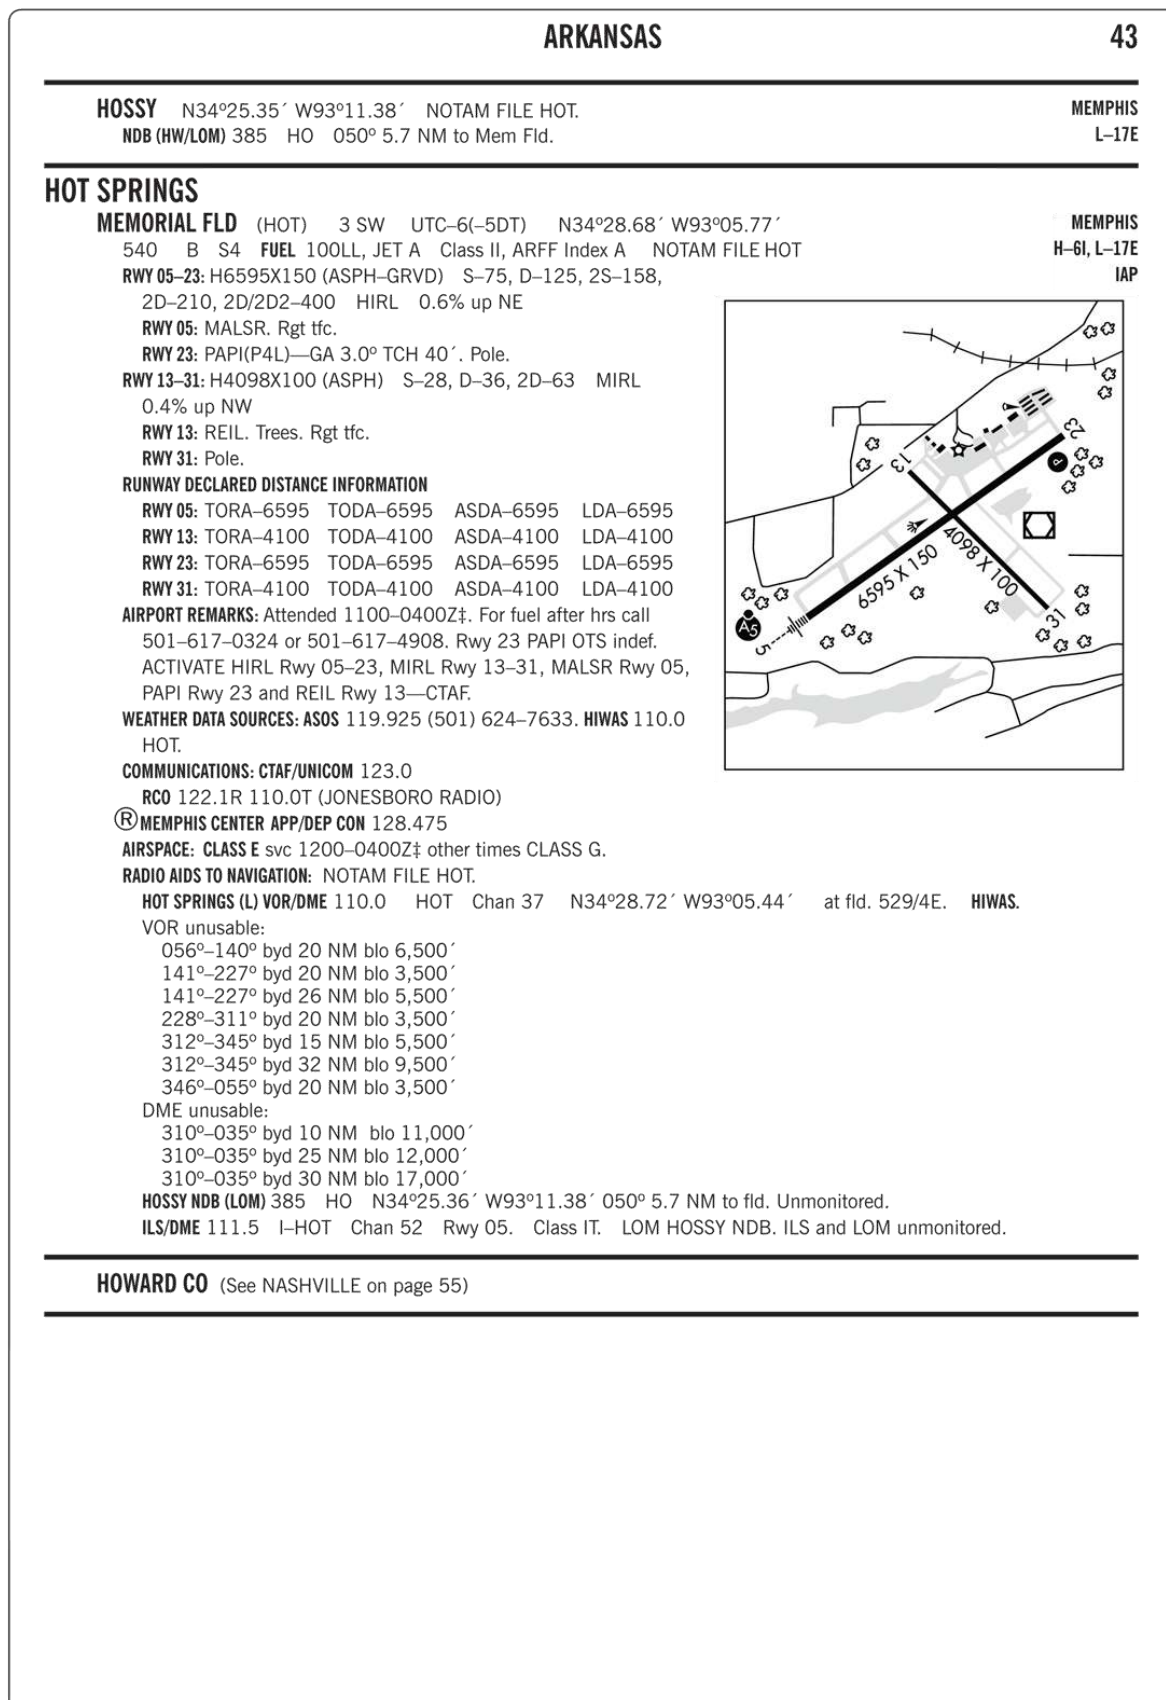


Figure 166. Chart Supplement (HOT).


©ASA

(BYP.BYP6) 13178

ST-6039 (FAA)

DALLAS-FORT WORTH INTL (DFW)
DALLAS-FORT WORTH, TEXAS

BONHAM SIX ARRIVAL Transition Routes

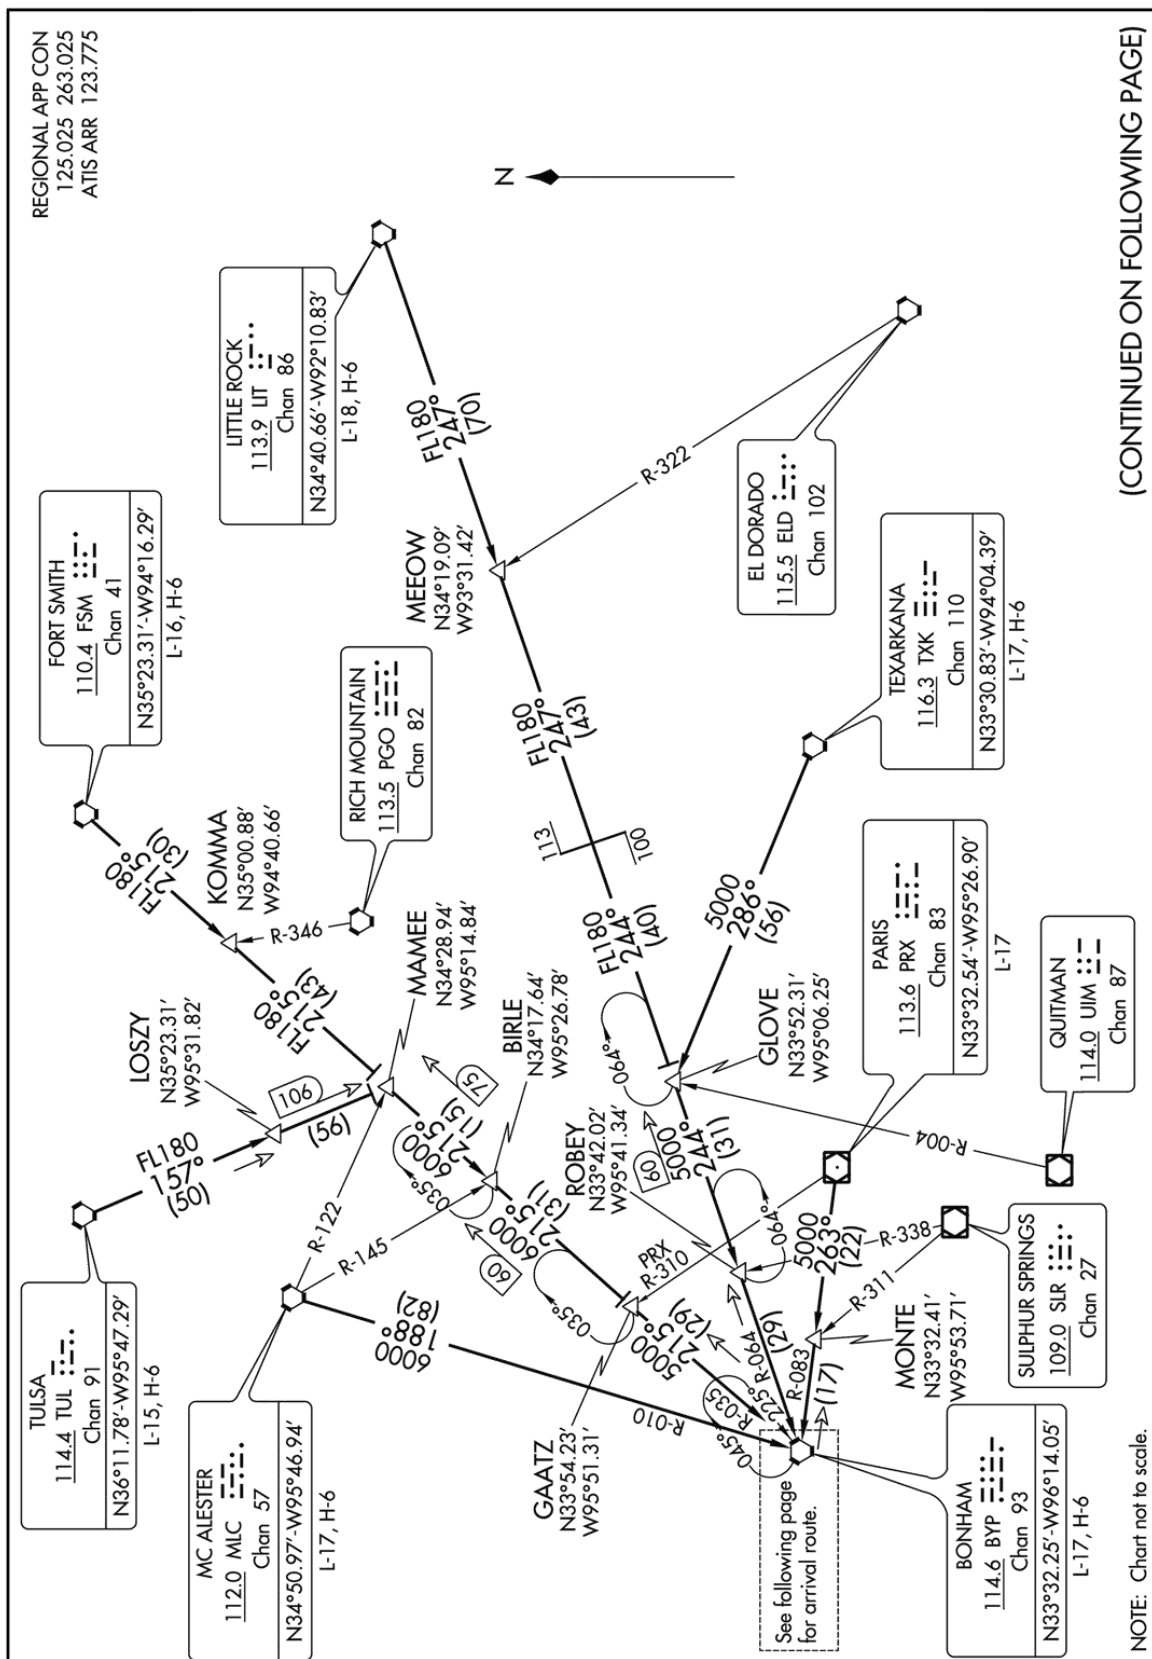

(CONTINUED ON FOLLOWING PAGE)

BONHAM SIX ARRIVAL Transition Routes

DALLAS-FORT WORTH, TEXAS
DALLAS-FORT WORTH INTL (DFW)

(BYP.BYP6) 13178

Figure 167. BONHAM Six Arrival Transition Routes (BYP.BYP6) (DFW).

©ASA


(BYP.BYP6) 13178

BONHAM SIX ARRIVAL Arrival Routes

ST-6039 (FAA)

DALLAS-FORT WORTH INTL (DFW)

DALLAS-FORT WORTH, TEXAS

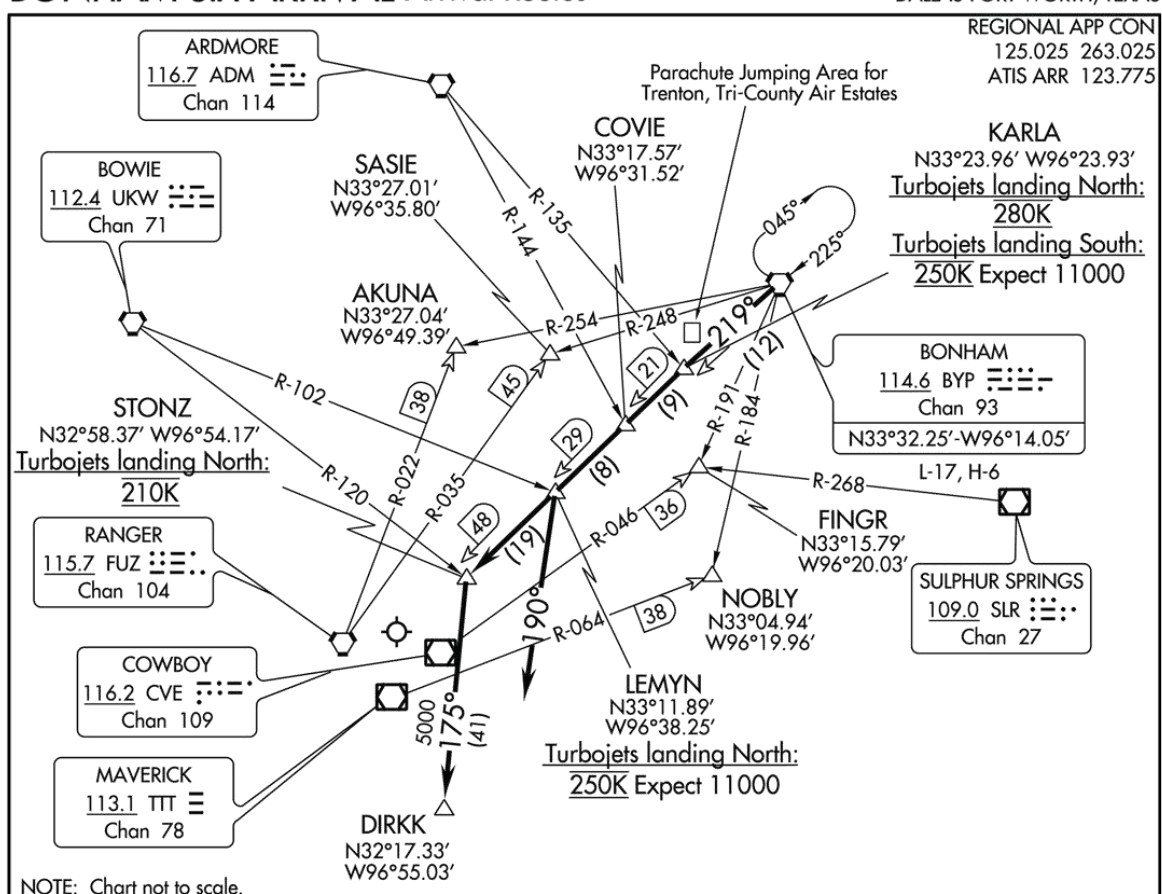

ARRIVAL DESCRIPTION

FORT SMITH TRANSITION (FSM.BYP6): From over FSM VORTAC on FSM R-215 to MAMEE INT, then on BYP R-035 to BYP VORTAC. Thence. . .

LITTLE ROCK TRANSITION (LIT.BYP6): From over LIT VORTAC on LIT R-247 to MEEOW INT then on LIT R-247 and BYP R-064 to GLOVE INT, then on BYP R-064 to BYP VORTAC. Thence. . .

MC ALESTER TRANSITION (MLC.BYP6): From over MLC VORTAC on MLC R-188 and BYP R-010 to BYP VORTAC. Thence. . .

PARIS TRANSITION (PRX.BYP6): From over PRX VOR/DME on PRX R-263 to MONTE INT then on BYP R-083 to BYP VORTAC. Thence. . .

TEXARKANA TRANSITION (TXK.BYP6): From over TXK VORTAC on TXK R-286 to GLOVE INT then on BYP R-064 to BYP VORTAC. Thence. . .

TULSA TRANSITION (TUL.BYP6): From over TUL VORTAC on TUL R-157 to MAMEE INT, then on BYP R-035 to BYP VORTAC. Thence. . .

. . . . **ALL AIRCRAFT:** From over BYP VORTAC on BYP R-219, thence. . .

ALL AIRCRAFT LANDING SOUTH: To LEMYN INT, expect vectors to final approach course.

JETS LANDING NORTH: FOR /E, /F, /G, and /R (RNP-2.0) EQUIPPED AIRCRAFT:
From over STONZ INT direct DIRKK, expect vector to final approach course prior to DIRKK, if not received by DIRKK fly present heading.

ALL OTHERS: To STONZ depart STONZ heading 175° for vector to final approach course.

PROPS LANDING NORTH: Depart LEMYN INT heading 190°, expect vectors to final approach course.

BONHAM SIX ARRIVAL Arrival Routes

(BYP.BYP6) 13178

DALLAS-FORT WORTH, TEXAS

DALLAS-FORT WORTH INTL (DFW)

Figure 168. BONHAM Six Arrival Routes (BYP.BYP6) (DFW).

©ASA

240

TEXAS

DALLAS

ADDISON (ADS) 9 N UTC-6(-5DT) N32°58.11' W96°50.19'
645 B S4 FUEL 100LL, JET A OX 2, 3 TPA—See Remarks LRA NOTAM FILE ADS

RWY 15-33: H7203X100 (ASPH-GRVD) S-60, D-120 HIRL

RWY 15: MALSR. PAPI(P4R)—GA 3.0° TCH 60'. Thld dsplcd 979'. Pole.

RWY 33: REIL. PAPI(P4L)—GA 3.0° TCH 60'. Thld dsplcd 772'. Bldg.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 15: TORA-7202 TODA-7202 ASDA-6592 LDA-5613

RWY 33: TORA-7202 TODA-7202 ASDA-7202 LDA-6431

AIRPORT REMARKS: Attended continuously. Birds on and in/ovf arpt. No touch and go landings without arpt managers approval. Numerous 200' buildings within 1 mile East, and South of arpt, transmission towers and water tanks West of arpt. Noise sensitive areas surround arpt. Pilots requested to use NBAA std noise procedures. TPA—1600 (956) for light acft, 2000 (1356) for large acft. Be alert: Rwy holding position markings located at the west edge of Twy A. ACTIVATE HIRL Rwy 15-33 and MALSR Rwy 15—CTAF. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: AWOS-3 (972) 386-4855 LAWRS.

COMMUNICATIONS: CTAF 126.0 ATIS 133.4 972-628-2439

UNICOM 122.95

® REGIONAL APP/DEP CON 124.3

TOWER 126.0 (1200-0400Z†) GND CON 121.6 CLNC DEL 119.55

AIRSPACE: CLASS D svc 1200-0400Z†, other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE FTW.

MAVERICK (H) VORW/DME 113.1 TTT Chan 78 N32°52.15' W97°02.43' 054° 11.9 NM to fld. 540/6E.

All acft arriving DFW are requested to turn DME off until departure due to traffic overload of Maverick DME

ILS/DME 110.1 I-ADS Chan 38 Rwy 15. Class IT. Unmonitored when ATCT closed. DME also serves Rwy 33.


ILS/DME 110.1 I-TBQ Chan 38 Rwy 33. Class IB. Localizer unmonitored when ATCT closed. DME also serves Rwy 15.

DALLAS-FT WORTH

COPTER

H-6H, L-17C, A

IAP, AD

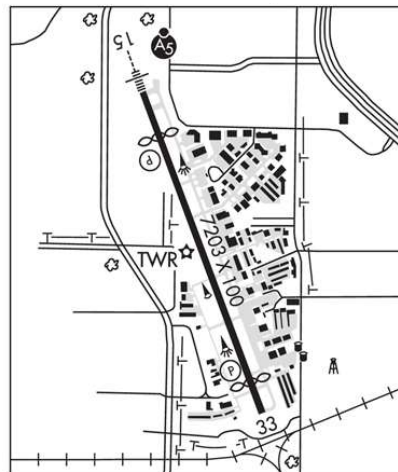

AIR PARK-DALLAS (F69) 16 NE UTC-6(-5DT) N33°01.41' W96°50.22'

695 S4 FUEL 100LL TPA-1890(1195) NOTAM FILE FTW

RWY 16-34: H3080X30 (ASPH) LIRL(NSTD)

RWY 16: Thld dsplcd 300'. Pole.

RWY 34: Tree. Rgt tfc.

AIRPORT REMARKS: Unattended. For fuel call 972-248-4265 prior to arrival. Rwy 16-34 extensive cracking, loose asph and stones rwy. Rwy 16-34 NSTD LIRL, south 2780' of rwy lgtd. Rwy 16 and Rwy 34 NSTD centerline marking incorrect size and spacing, dsplcd thld yellow. Rwy numbers 25' tall. ACTIVATE LIRL Rwy 16-34—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE FTW.

MAVERICK (H) VORW/DME 113.1 TTT Chan 78 N32°52.15' W97°02.43' 042° 13.8 NM to fld. 540/6E.

All acft arriving DFW are requested to turn DME off until departure due to traffic overload of Maverick DME

DALLAS-FT WORTH

COPTER

L-17C, A

AIRPARK EAST (1F7) 23 E UTC-6(-5DT) N32°48.78' W96°21.12'

510 B S4 NOTAM FILE FTW

RWY 13-31: H2630X30 (ASPH) LIRL

RWY 13: Tree. Rgt tfc.

RWY 31: Tree.

AIRPORT REMARKS: Unattended. ACTIVATE LIRL Rwy 13-31—122.9.

COMMUNICATIONS: CTAF/UNICOM 122.7

DALLAS-FT WORTH

COPTER

Figure 169. Excerpt from Chart Supplement (ADS).

©ASA

DALLAS, TEXAS

AL-768 (FAA)


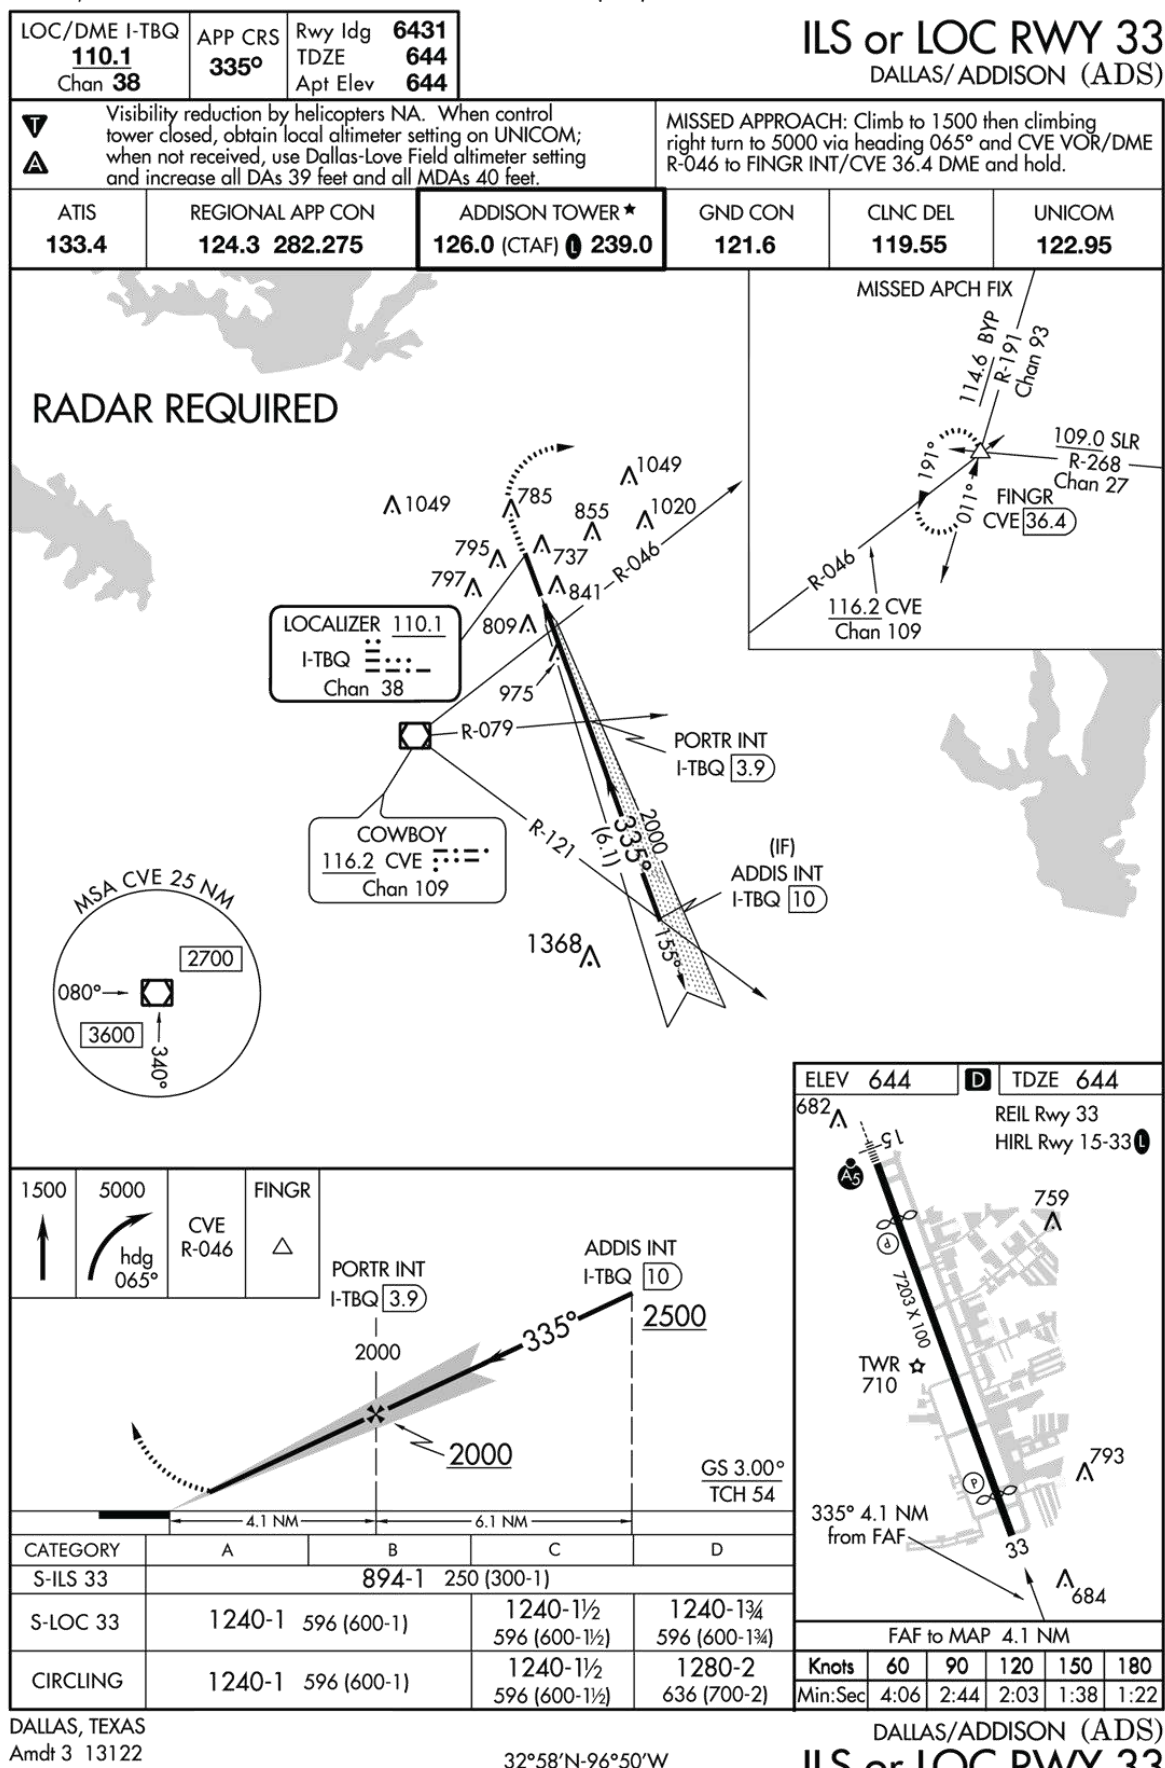


Figure 170. ILS or LOC RWY 33 (ADS).

©ASA

DALLAS, TEXAS

AL-768 (FAA)

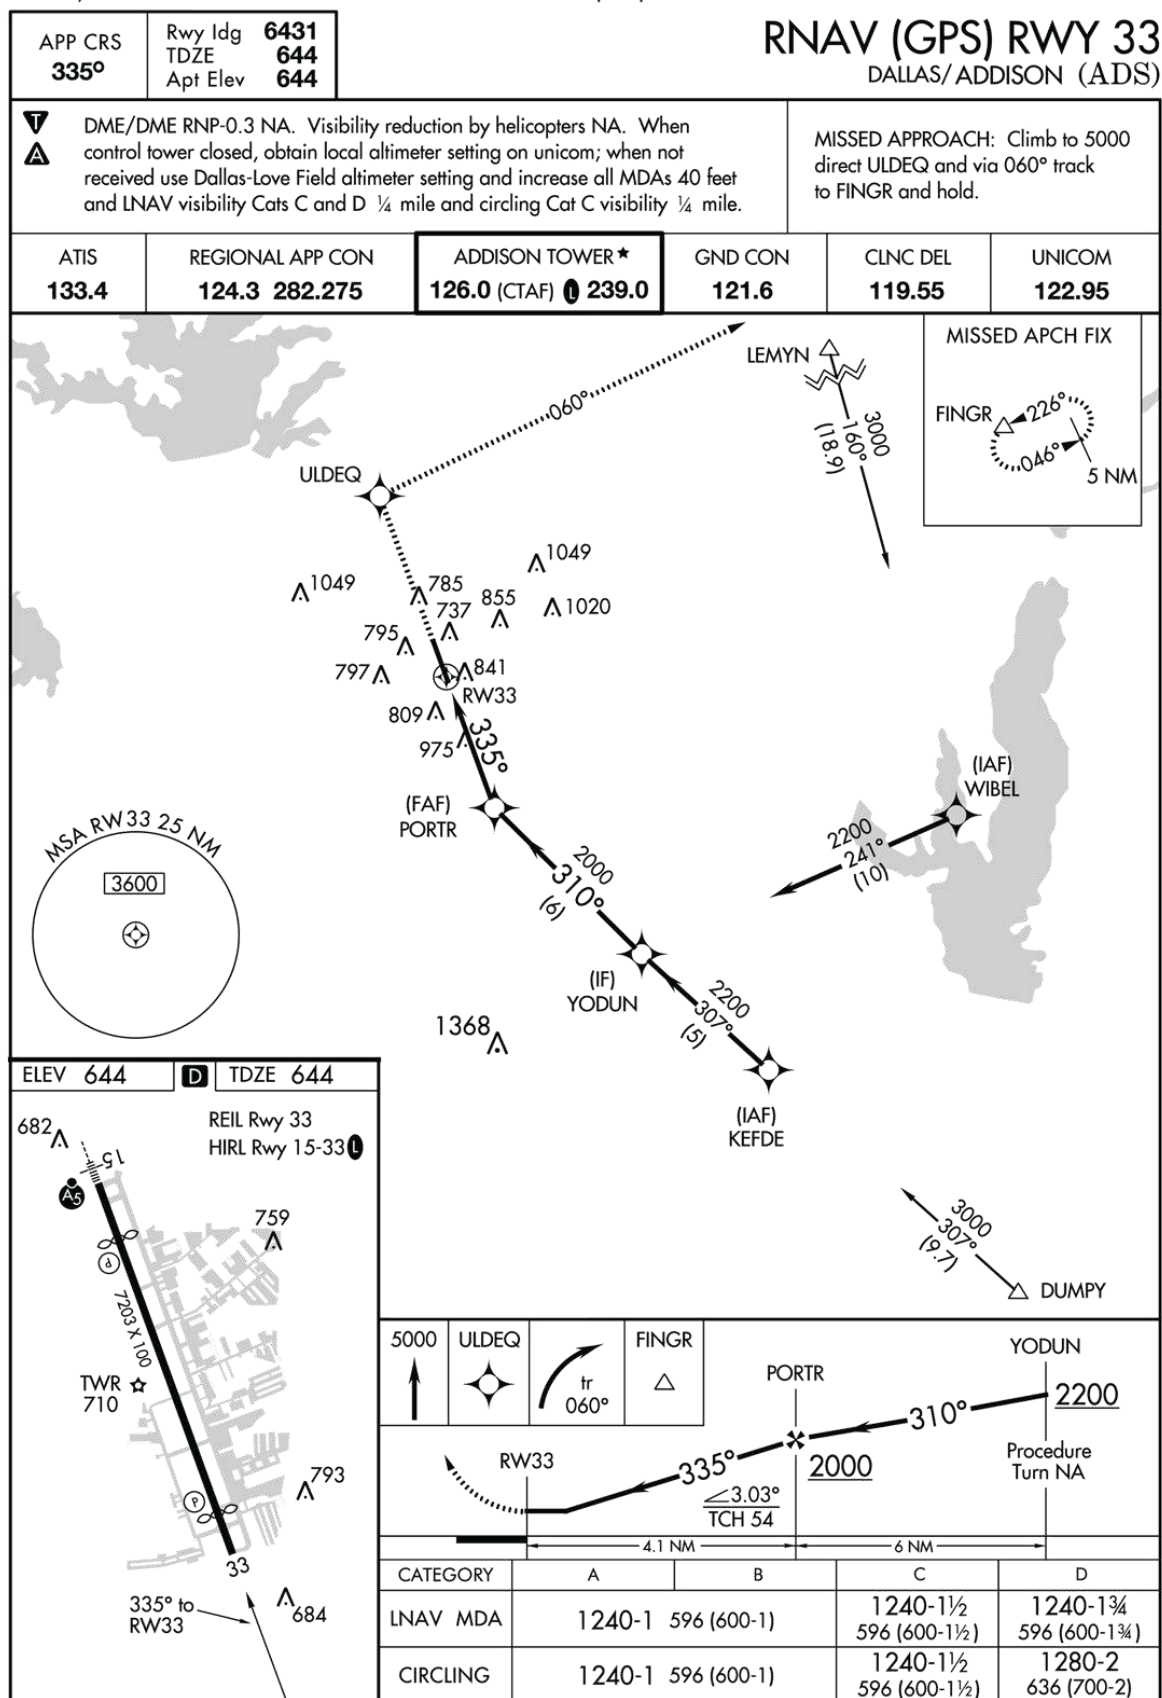

DALLAS, TEXAS
Amdt 1 13122

32°58'N-96°50'W

DALLAS/ADDISON (ADS)
RNAV (GPS) RWY 33

Figure 171. RNAV (GPS) RWY 33 (ADS).

©ASA

84

MONTANA

HELENA RGNL (HLN)(KHLN) P (ARNG) 2 NE UTC-7(-6DT) N46°36.41' W111°58.97' **GREAT FALLS**
3877 B S4 FUEL 80, 100, 100LL, JET A OX 1, 3 LRA Class I, ARFF Index B NOTAM FILE HLN H-1D, L-13C
RWY 09-27: H9000X150 (ASPH-PFC) S-100, D-160, 2S-175, IAP, DIAP, AD

2D-250 HIRL

RWY 09: REIL. VASI(V4L)—GA 3.0° TCH 45'. Ground. 0.3% down.

RWY 27: MALSR. VASI(V4L)—GA 3.0° TCH 47'. Rgt tfc.

RWY 05-23: H4644X75 (ASPH-PFC) S-21, D-30 MIRL 1.2% up SW
RWY 05: Road.

RWY 23: PAPI(P2L)—GA 3.0° TCH 49'. Fence. Rgt tfc.

RWY 17-35: H2989X75 (ASPH-PFC) S-21, D-30 MIRL 1.7% up SE
RWY 35: Ground. Rgt tfc.

MILITARY SERVICE: LGT When twr clsd, ACTIVATE-HIRL Rwy 09-27, MIRL Rwy 05-23 and 16-34, REIL Rwy 09, MALSR Rwy 27 – CTAF. FUEL A+, J8 (C406-442-2190. Opr 1200-0600Z†, OT \$150 fee, 90 min PPR.) (NC-80, 100, 100LL)

AIRPORT REMARKS: Attended 1200-0800Z†. ARFF coverage provided for scheduled Part 121 air carriers only exc with prior approval, call 406-442-2821. Ldg rights customs avbl call 406-449-5506. Rwy 17-35 and Rwy 05-23 (exc between Twy F and Rwy 09-27) not avbl for air carrier use by acft with greater than 30 passenger seats. Twy A, Twy B, and Twy C between Twy A and Rwy 35 not avbl for air carrier use by acft with greater than 30 passenger seats. When twr clsd

ACTIVATE HIRL Rwy 09-27, MIRL Rwy 05-23 and Rwy 17-35, REIL Rwy 09, MALSR Rwy 27—CTAF. Ldg fee for all commercial acft and all acft over 10,000 lbs. Flight Notification Service (ADCUS) avbl. NOTE: See SPECIAL NOTICE.

MILITARY REMARKS: ARNG Opr Mon-Fri 1400-0030Z†, exc holidays. Exercise caution while taxiing, AASF ramp not stressed for large acft. Ctc flt ops for ramp advisory 126.2, DSN 324-3055/56, C406-324-3055/56. No tran svc Sat, Sun, holidays or after 2300Z† Mon-Fri.

WEATHER DATA SOURCES: ASOS (406) 443-4317

COMMUNICATIONS: CTAF 118.3 ATIS 120.4 UNICOM 122.95

RCO 122.55 255.4 (GREAT FALLS RADIO)

APP/DEP CON 119.5 229.4 (1300-0500Z†)

SALT LAKE CENTER APP/DEP CON 133.4 285.4 (0500-1300Z†)

TOWER 118.3 257.8 (1300-0500Z†) GND CON 121.9

ARNG OPS 40.65 126.2 321.45

AIRSPACE: CLASS D svc 1300-0500Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE HLN.

(H) VORTACW 117.7 HLN Chan 124 N46°36.41' W111°57.21' 254° 1.2 NM to fld. 3823/16E.

VOR portion unusable:

035°-050° byd 35 NM blo 12,000'

105°-165° byd 25 NM blo 17,000'

165°-185° byd 25 NM blo 13,500'

185°-230° byd 25 NM blo 17,500'

203°-213° byd 22 NM blo 13,000'

230°-270° byd 25 NM blo 12,500'

TACAN AZIMUTH and DME unusable:

035°-070° byd 35 NM blo 13,000'

165°-185° byd 25 NM blo 13,500'

250°-300° byd 25 NM blo 14,000'

320°-035° byd 25 NM blo 13,000'

TACAN DME unusable:

035°-070° byd 35 NM blo 13,000'

105°-150° byd 25 NM

105°-210° byd 15 NM blo 11,100'

105°-210° byd 20 NM blo 12,000'

150°-165° byd 25 NM blo 17,000'

165°-185° byd 25 NM blo 13,500'

185°-210° byd 25 NM

203°-213° byd 22 NM blo 13,000'

210°-250° byd 15 NM blo 12,000'

210°-250° byd 25 NM blo 17,500'

250°-300° byd 25 NM blo 14,000'

320°-035° byd 25 NM blo 13,000'


TACAN AZIMUTH unusable:

105°-150° byd 15 NM

150°-165° byd 15 NM blo 17,000'

185°-210° byd 15 NM

210°-250° byd 15 NM blo 17,500'

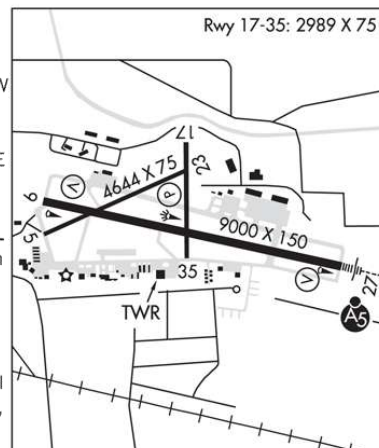

CONTINUED ON NEXT PAGE

Figure 172. Excerpt from Chart Supplement.

©ASA

216

TEXAS

BIG SPRING MC MAHON–WRINKLE (BPG) 2 SW UTC–6(–5DT) N32°12.76' W101°31.30' **DALLAS–FT WORTH**
2573 B S4 **FUEL** 100LL, JET A NOTAM FILE BPG **H–6G, L–6H**
RWY 17–35: H8802X100 (CONC) S–60, D–150, 2D–200 MIRL **IAP**
RWY 17: SSALS. PAPI(P4L)—GA 3.0° TCH 45'. Rgt tfc.
RWY 35: PAPI(P4L)—GA 3.0° TCH 36'.
RWY 06–24: H4601X75 (ASPH) MIRL 0.6% up NE
RWY 06: PVASI(PSIL)—GA 2.97° TCH 47'. Rgt tfc.
RWY 24: PVASI(PSIL)—GA 3.55° TCH 35'.
AIRPORT REMARKS: Attended Mon–Sat 1400–2300Z†. For fuel after hours call 432–267–8952 or 432–935–3395. Prairie dogs on rwys and twys. Extensive agricultural ops invof arpt. Sandhill Cranes crossing in the spring and fall. MIRL Rwy 06–24 and Rwy 17–35 preset low ints, to increase ints and ACTIVATE SSALS Rwy 17 and PVASI Rwy 06, Rwy 24, and PAPI Rwy 17 and Rwy 35—CTAF.
WEATHER DATA SOURCES: AWOS–3 118.025 (432) 263–3842.
COMMUNICATIONS: CTAF/UNICOM 122.8
RCO 122.4 (SAN ANGELO RADIO)
FORT WORTH CENTER APP/DEP CON 133.7
RADIO AIDS TO NAVIGATION: NOTAM FILE BPG.
(L) **VORTACW** 114.3 BGS Chan 90 N32°23.14' W101°29.02' 180° 10.5 NM to fld. 2670/11E.

BIGGS AAF (FORT BLISS) (BIF)(KBIF) A 5 NE UTC–7(–6DT) N31°50.97' W106°22.80' **EL PASO**
3948 B TPA—See Remarks NOTAM FILE ABQ Not insp. **H–4L, L–6F**
RWY 03–21: H13554X150 (PEM) PCN 120 R/C/W/T HIRL **DIAP AD**
RWY 03: PAPI(P4L)—GA 3.0° TCH 71'.
RWY 21: ALSF1. PAPI(P4L)—GA 3.0° TCH 71'. Rgt tfc. 0.3% down.
MILITARY SERVICE: LGT When unattended ACTIVATE 3–step HIRL Rwy 03–21, High Intensity ALS Category I configuration with sequenced Flashers (code) Rwy 21 and PAPI Rwy 21–127.9. **JASU** 4(A/M32A–86) 2(A/M32–95) **FUEL** A+ (Atlantic Avn, 1200–0400Z† Mon–Sun, C915–779–2831, 1 hr prior notice, after hr C915–861–2390, after hr call out fee \$100.)
FLUID SP TRAN ALERT 1300–0500Z† Mon–Sun, exc holidays.
MILITARY REMARKS: Attended Mon–Sun 1300–0500Z†, except holidays. See FLIP AP/1 Supplementary Arpt Remark. **RSTD** PPR all acft. 24 hr prior notice, ctc Airfield Ops DSN 621–8811/8330, C915–744–8811/8330. Twr and svcs avbl for all acft with PPR. PPR time valid +/– 1 hr. All acft ctc Afd Ops via PTD 30 min prior to arr. Twr and svcs unavbl before 1 hr prior to PPR sked arr. **CAUTION** El Paso Intl Rwy 22 2 NM SE can be mistaken for Rwy 21. Coyote hazard. **TFC PAT** Fixed Wing 5002(1054), Fixed Wing Category BCDE turbo prop 5502(1554), Rotary Wing 4502(554), Jet 6002(2054).
NS ABTMT VFR west arr/dep via mountain pass 15 NM NW of Biggs AAF. Avoid VFR over flight of city. Fly 1500' AGL, 1500' horizontal distance from mountain dwellings. **MISC** Approval required for access to ramp. Temporary storage of classified material avbl at Afd Ops. Intl garbage cap ltd. Expect delays unless placed in garbage bags prior to arrival. Hangar space extremely limited for transient acft. KBIF manual obsn and wx forecaster avbl Mon–Fri 1300–0500Z†, clsd holidays. DSN 621–1215/1214, C915–744–1215/1214, OT 25th OWS, Davis Monthan AFB, DSN 228–6598/6599.
COMMUNICATIONS: ATIS 120.0 254.3 (C915–772–9412) PTD 122.7
(R) **EL PASO APP CON** 119.15 353.5 (South of V16) 124.25 298.85 (North of V16)
TOWER 127.9 342.25 (Mon–Sun 1300–0500Z†, except holidays). Advisory svc twr freq other times.
(R) **EL PASO DEP CON** 121.3 263.0
EL PASO CLNC DEL 125.0 379.1
AIRSPACE: CLASS D svc 1300–0500Z† Mon–Sat except holidays other times CLASS E.
RADIO AIDS TO NAVIGATION: NOTAM FILE ABQ.
NEWMAN (L) VORTACW 112.4 EWM Chan 71 N31°57.10' W106°16.34' 210° 8.2 NM to fld. 4040/12E.
DME portion unusable:
220°–255° byd 25 NM blo 12,000'
COMM/NAV/WEATHER REMARKS: Radar—See Terminal FLIP for Radar Minima.

BIRD DOG AIRFIELD (See KRUM on page 297)

BISHOP (See DECATUR on page 245)

Figure 172A. Excerpt from Chart Supplement.

©ASA

MONTANA		85
CONTINUED FROM PRECEDING PAGE		
CAPITOL NDB (HW) 335 CVP N46°36.40' W111°56.23' 258° 1.9 NM to fld. NDB unmonitored when ATCT clsd. HAUSER NDB (MHW) 386 HAU N46°34.13' W111°45.48' 268° 9.6 NM to fld. NDB unmonitored when HLN ATCT clsd. ILS 110.1 I-HLN Rwy 27. Unmonitored when ATCT closed. Localizer backcourse unusable byd 22° rgt of course, unusable within 2.7 DME.		
HINSDALE (6U5) 0 SE UTC-7(-6DT) N48°23.28' W107°05.00'		BILLINGS
2220 NOTAM FILE GTF RWY 07-25: 2200X75 (TURF) LIRL(NSTD) 0.7% up W RWY 07: Road. RWY 10-28: 2160X200 (TURF) 0.3% up W RWY 10: Road. RWY 16-34: 1960X75 (TURF) 1.5% up S RWY 16: P-line. RWY 34: Fence. AIRPORT REMARKS: Unattended. Rwy soft when wet. Hay bales and farm equipment adjacent to rwy. Rwy not clearly defined. Rwy 16-34, Rwy 07-25 and Rwy 10-28 marked with white cones full length of rwy. Rwy 16 p-lines marked with globes. Rwy 07-25 NSTD LIRL 335' spacing between lgts, one thld lgt each end. For rwy lgts phone 406-364-2272/2387. COMMUNICATIONS: CTAF 122.9		
HOGELAND (6U6) 1 NW UTC-7(-6DT) N48°51.61' W108°39.66'		BILLINGS
3139 B NOTAM FILE GTF RWY 07-25: 3140X60 (TRTD) 0.6% up W RWY 16-34: 1230X50 (TURF) RWY 34: Bldg. AIRPORT REMARKS: Unattended. Rwy 16-34 for emerg use only, road and drainage ditch parallel rwy on east side. Rwy 07-25 patches of loose aggregate and grvl. COMMUNICATIONS: CTAF 122.9		
HOT SPRINGS (SØ9) 2 E UTC-7(-6DT) N47°36.75' W114°36.81'		GREAT FALLS
2763 B NOTAM FILE GTF RWY 06-24: H3550X45 (ASPH-TRTD) MIRL RWY 24: Thld dspld 411'. Road. AIRPORT REMARKS: Unattended. Ultralights on and in vicinity of arpt. Occasional snow removal. Rwy 06-24 asph grvl composition full length. Rwy 24 has 411' unlighted, 2169' lgtd at ngt. Rwy 06-24 cones adjacent to MIRL full length and dspld thld marked with white cones. Rwy 06 and Rwy 24 numbers 4' x 8' in measure, thld line and rwy lines NSTD. COMMUNICATIONS: CTAF 122.9		
HYSHAM (6U7) 2 E UTC-7(-6DT) N46°17.61' W107°11.60'		BILLINGS
2624 B NOTAM FILE GTF RWY 07-25: H3060X45 (ASPH-TRTD) LIRL AIRPORT REMARKS: Unattended. 1030' dirt extension east of Rwy 07 thld soft when wet. Rwy 07 basic markings NSTD numbers and stripes, markings are faded. Rwy 25 basic markings NSTD small numbers and stripes, markings are faded. Numerous rwy lgts inop. ACTIVATE LIRL Rwy 07-25—CTAF. COMMUNICATIONS: CTAF 122.9		
JORDAN (JDN) 2 NW UTC-7(-6DT) N47°19.73' W106°57.16'		BILLINGS L-13D
2662 B NOTAM FILE JDN RWY 10-28: H4300X75 (ASPH-PFC) S-12.5 MIRL RWY 28: PAPI(P2L)—GA 3.0° TCH 29'. AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 10-28 and PAPI Rwy 28—CTAF. COMMUNICATIONS: CTAF 122.9 RADIO AIDS TO NAVIGATION: NOTAM FILE GGW. GLASGOW (H) VORW/DME 113.9 GGW Chan 86 N48°12.92' W106°37.53' 180° 54.8 NM to fld. 2283/14E. NDB (MHW) 263 JDN N47°20.00' W106°56.29' at fld. NOTAM FILE JDN. VFR only.		
JUDITH MOUNTAIN N47°13.03' W109°13.31'		GREAT FALLS L-13D
RCO 122.2 (GREAT FALLS RADIO)		

Figure 173. Excerpt from Chart Supplement.


©ASA

(JEN.JEN9) 09351

GLEN ROSE NINE ARRIVAL

ST-6039 (FAA)

DALLAS-FT. WORTH, TEXAS

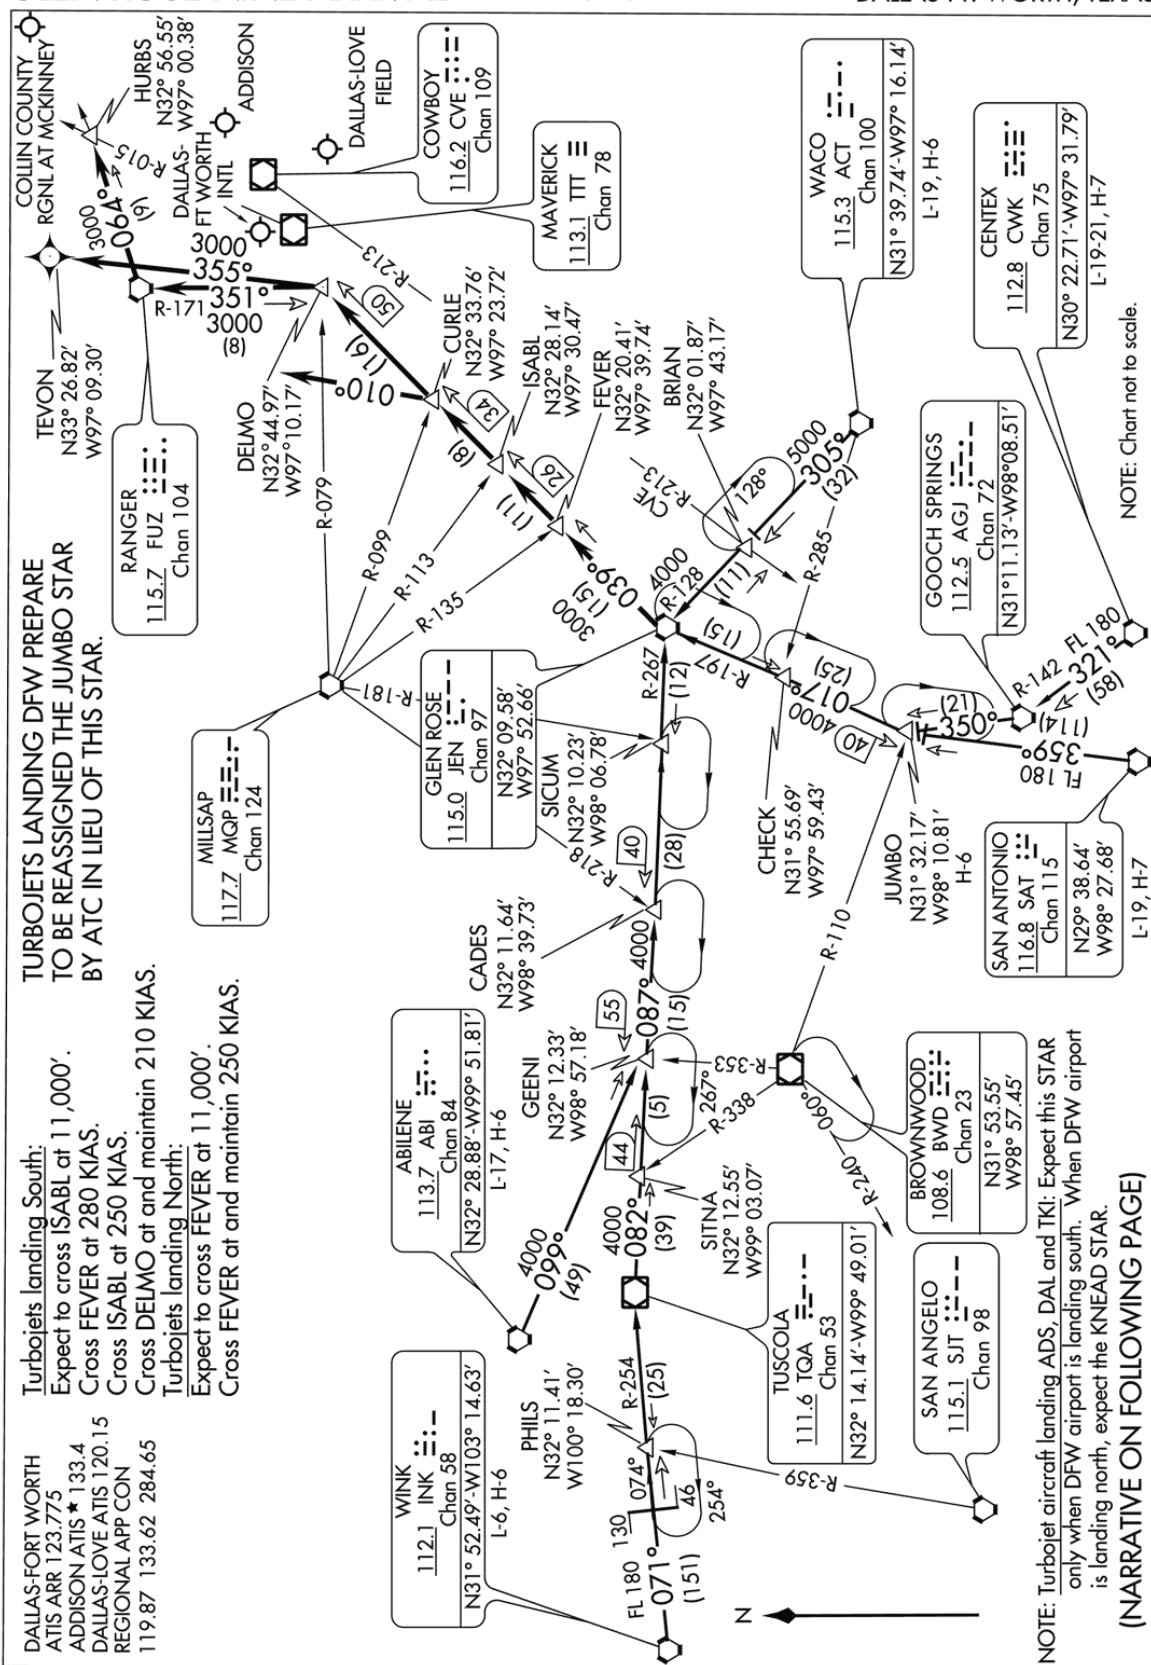

GLEN ROSE NINE ARRIVAL

DALLAS-FT. WORTH, TEXAS

(JEN.JEN9) 09351

Figure 174. GLEN ROSE Nine Arrival (JEN.JEN9).

©ASA

(JEN.JEN9) 09351

GLEN ROSE NINE ARRIVAL

ST-6039 (FAA)

DALLAS-FT. WORTH, TEXAS

ARRIVAL DESCRIPTION

ABILENE TRANSITION (ABI.JEN9): From over ABI VORTAC via R-099 to GEENI INT, then via JEN R-267 to JEN VORTAC. Thence. . . .

CENTEX TRANSITION (CWK.JEN9): From over CWK VORTAC via CWK R-321 and AGJ R-142 to AGJ VORTAC, then via AGJ R-350 to JUMBO INT, then via JEN R-197 to JEN VORTAC. Thence. . . .

JUMBO TRANSITION (JUMBO.JEN9): From over JUMBO INT via JEN R-197 to JEN VORTAC. Thence. . . .

SAN ANTONIO TRANSITION (SAT.JEN9): From over SAT VORTAC via SAT R-359 to JUMBO INT, then via JEN R-197 to JEN VORTAC. Thence. . . .

WACO TRANSITION (ACT.JEN9): From over ACT VORTAC via ACT R-305 and JEN R-128 to JEN VORTAC. Thence. . . .

WINK TRANSITION (INK.JEN9): From over INK VORTAC via INK R-071 and TQA R-254 to TQA VOR/DME, then via TQA R-082 to GEENI INT, then via JEN R-267 to JEN VORTAC. Thence. . . .

. . . . ALL AIRCRAFT: From over JEN VORTAC via JEN R-039, thence. . . .

ALL AIRCRAFT LANDING NORTH: To CURLE INT, expect vectors to final approach course.

JETS LANDING SOUTH: To DELMO, depart DELMO heading 355°.

For /E, /F, /G and /R (RNP 2.0) EQUIPMENT SUFFIXED AIRCRAFT: From over DELMO WP direct TEVON WP, expect vector to final approach course prior to TEVON WP. If not received by TEVON fly present heading.

NON TURBOJETS LANDING SOUTH: To CURLE INT, depart CURLE heading 010° for vectors to final approach course.

AIRCRAFT LANDING DAL, ADS, TKI: To DELMO INT, depart DELMO via FUZ R-171 to FUZ VORTAC then FUZ R-064 to HURBS INT, expect vectors to final approach course.

GLEN ROSE NINE ARRIVAL

DALLAS-FT. WORTH, TEXAS

(JEN.JEN9) 09351

Figure 175. GLEN ROSE Nine Arrival (JEN.JEN9).

©ASA

244

TEXAS

CONTINUED FROM PRECEDING PAGE

AIRPORT REMARKS: Attended continuously. Rwy 17L–35R CLOSED 0400–1200Z† except PPR. Rwy 13R–31L CLOSED 0400–1200Z† except PPR. Rwy 13L–31R CLOSED 0400–1200Z† except PPR. Rwy 31R last 625' CLOSED indef. Visual screen 20' AGL 1180' south AER 35C. Visual screen 22' AGL 1179' south AER 35L. ASDE-X SURVEILLANCE system in use: Pilots should opr transponders with mode C on all twys and rwys. PPR for acft with wingspan 215' or greater (GROUP VI), call arpt ops 972–973–3112 for follow me services while taxiing to and from ramp and rwys. Rwy 13L, Rwy 17L, Rwy 31R, and Rwy 35R rwy visual range touchdown, midpoint and rollout avbl. Rwy 31L and Rwy 31R runway visual range touchdown and rollout avbl. Arpt under construction, PAEW in movement areas. Birds on and in vicinity of arpt. Tkf distance for Rwy 17L from Twy Q2 is 8196'. Tkf distance for Rwy 35R from Twy Q9 is 8196'. Tkf distance for Rwy 17R from Twy EG is 13082' and from Twy EH is 12816'. Tkf distance for Rwy 35L from Twy EQ is 13084' and from Twy EP is 12811'. Tkf distance for Rwy 36R from Twy WP is 12815', from Twy WQ is 13082'. Tkf distance for Rwy 18L from Twy WG is 13082', from Twy WH is 12815'. Tkf distance for Rwy 17C from Twy EG is 13,082'. Tkf distance for Rwy 18R from Twy WG is 13,082'. Land and hold–short signs on Rwy 17C at Twy B 10,460' south of Rwy 17C thld, Rwy 18R at Twy B 10,100' south of Rwy 18R thld, Rwy 35C at Twy EJ 9050' north of Rwy 35C thld, Rwy 36L at Twy Z 10,650' north of Rwy 36L thld, lgtd and marked with in–pavement pulsating white lgts. Twy G11 east of Twy G clsd to acft with wingspan 125' and greater. Acft using gates D6–D17 must obtain approval from DFW ramp twr 129.95 prior to entering ramp and prior to pushback 1130–0430Z†. Use extreme care at other times. Apron Terminal E ramp work in progress, ctc DFW ramp on 131.0 1530–1200Z† for Terminal E procedure change. Apron entrance/exit Points 32, 33, 34, 35, 36, 37, 38 and 39 clsd to acft with wingspan greater than 135'. Acft pushing back or powering back on Terminal B Apron have right of way. Frequent ground support equip under escort crossing Twys A and B at Twy HA. Apron entrance/exit points 5, 7, 42 and 44 clsd to acft with wingspan 118' and greater. Apron entrance/exit points 42 and 44 clsd to acft with wingspan greater than 118'. Terminal B apron taxilane btn apron entrance/exit point taxilanes 110 and 115 clsd to acft with wingspan 118' and greater. Apron entrance/exit points 22, 24, 105, 107 and 122 clsd to acft with wingspan 125' and greater. Apron entrance/exit point 124 clsd to acft with wingspan 200' and greater. Twy A5 clsd to acft with wingspan 171' and greater. Twys may require judgemental oversteering for large acft. Apron entrance/exit points 52 and 53 clsd to acft with wingspan 171' and greater. Acft exiting via apron entrance/exit points 42, 43 and 44 ctc Gnd Con prior to taxiing. PPR general aviation ops 0400–1200Z†, call arpt ops 972–973–3112. PPR from arpt ops for general aviation acft to proceed to airline terminal gate except to general aviation facility. PPR from the primary tenant airlines to operate within the central terminal area. Proper minimum object free area distances may not be maintained for ramp/apron taxi lanes. Twy edge reflectors along all twys. Landing fee. Flight Notification Service (ADCUS) available. NOTE: See Land and Hold Short Operations, Intersection Departures During Periods of Darkness, Noise Abatement Procedures and Continuous Power Facilities.

WEATHER DATA SOURCES: ASOS (972) 453–0992 LLWAS.

COMMUNICATIONS: D–ATIS ARR 123.775 (972) 615–2701 D–ATIS DEP 135.925 (972) 615–2701 UNICOM 122.95

Ⓡ RGNL APP CON 125.025 133.525 (E) 119.875 133.625 (W)

DFW TOWER 126.55 127.5 (E) 124.15 134.9 (W) GND CON 121.65 121.8 (E) 121.85 (W)

CLNC DEL 128.25

Ⓡ RGNL DEP CON 118.55 (E) 126.475 (W) 124.825 (N) 125.125 (S)

AIRSPACE: CLASS B See VFR Terminal Area Chart

RADIO AIDS TO NAVIGATION: NOTAM FILE FTW.

MAVERICK (H) VORW/DME 113.1 TTT Chan 78 N32°52.15' W97°02.43' 358° 1.7 NM to fld. 540/6E.

ILS/DME 109.5 I–LWN Chan 32 Rwy 13R. Class IE.

ILS/DME 110.3 I–FLQ Chan 40 Rwy 17C. Class IIIIE. DME also serves Rwy 35C.

ILS/DME 111.75 I–PPZ Chan 54(Y) Rwy 17L. Class IIIIE. DME also serves Rwy 35R.

ILS/DME 111.35 I–JHZ Chan 50(Y) Rwy 17R. Class IE. DME also serves Rwy 35L.

ILS/DME 110.55 I–CIX Chan 42(Y) Rwy 18L. Class IE. DME also serves Rwy 36R.

ILS/DME 111.9 I–VYN Chan 56 Rwy 18R. Class IIIIE. DME also serves Rwy 36L.

ILS/DME 110.9 I–RRA Chan 46 Rwy 31R. Class IE.

ILS/DME 110.3 I–PKQ Chan 40 Rwy 35C. Class IIIIE. DME also serves Rwy 17C. OM/comlo also serves Rwy 35L.

ILS/DME 111.35 I–UWX Chan 50(Y) Rwy 35L. Class IE. OM/comlo also serves Rwy 35R. LOC unusable byd 14 NM blo 3,400'. DME also serves Rwy 17R.

ILS/DME 111.75 I–AJQ Chan 54(Y) Rwy 35R. Class IIIIE. DME also serves Rwy 17L. LOC unusable byd 16 NM 5° right of course.

ILS/DME 111.9 I–BXN Chan 56 Rwy 36L. Class ID. DME also serves Rwy 18R. OM also serves Rwy 36R. LOC unusable byd 15 NM 5° right of course.

ILS/DME 110.55 I–FJN Chan 42(Y) Rwy 36R. Class IE. OM also serves Rwy 36L. DME also serves Rwy 18L.

COMM/NAV/WEATHER REMARKS: All acft arriving DFW are requested to turn DME off until dep due to tfc overload of Maverick DME.

DALLAS/FORT WORTH INTL (See DALLAS–FORT WORTH on page 243)

DAN E RICHARDS MUNI (See PADUCAH on page 325)

DAN JONES INTL (See HOUSTON on page 279)

Figure 176A. ILS-1 RWY 36L, Dallas-Fort Worth Intl.

©ASA

TEXAS

243

DALLAS–FORT WORTH

DALLAS/FORT WORTH INTL (DFW) 12 NW UTC–6(–5DT) N32°53.81' W97°02.28'
607 B FUEL 100LL, JET A OX 1, 3 AOE Class I, ARFF Index E NOTAM FILE DFW
RWY 17C–35C: H13401X150 (CONC–GRVD) S–120, D–200, 2S–175, 2D–600, 2D/2D2–850 HIRL
CL
RWY 17C: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 74'.
RWY 35C: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 76'.
RWY 17R–35L: H13401X200 (CONC–GRVD) S–120, D–200, 2S–175, 2D–600, 2D/2D2–850 HIRL CL
RWY 17R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 68'.
RWY 35L: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 63'.
RWY 18L–36R: H13400X200 (CONC–GRVD) S–120, D–200, 2S–175, 2D–600, 2D/2D2–850 HIRL CL
RWY 18L: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 70'.
RWY 36R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 66'.
RWY 18R–36L: H13400X150 (CONC–GRVD) S–120, D–200, 2S–175, 2D–600, 2D/2D2–850 HIRL CL
RWY 18R: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 74'.
RWY 36L: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 72'.
RWY 13R–31L: H9301X150 (CONC–GRVD) S–120, D–200, 2S–175, 2D–600, 2D/2D2–850 HIRL CL
RWY 13R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 71'.
RWY 31L: REIL. PAPI(P4L)—GA 3.13° TCH 72'.
RWY 13L–31R: H9000X200 (CONC–GRVD) S–120, D–200, 2S–175, 2D–600, 2D/2D2–850 HIRL CL
RWY 13L: REIL. PAPI(P4L)—GA 3.0° TCH 82'. Thld dsplcd 625'. 0.5% down.
RWY 31R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 69'. 0.5% up.
RWY 17L–35R: H8500X150 (CONC–GRVD) S–120, D–200, 2S–175, 2D–600, 2D/2D2–850 HIRL CL
RWY 17L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 77'. Antenna. 0.6% up.
RWY 35R: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 73'. 0.6% down.

LAND AND HOLD–SHORT OPERATIONS

LDG RWY	HOLD–SHORT POINT	AVBL LDG DIST
RWY 17C	TWY B	10460
RWY 18R	TWY B	10100
RWY 35C	TWY EJ	9050
RWY 36L	TWY Z	10650

RUNWAY DECLARED DISTANCE INFORMATION

RWY 13L:TORA–9000	TODA–9000	ASDA–9000	LDA–8375
RWY 13R:TORA–9301	TODA–9301	ASDA–9301	LDA–9301
RWY 17C:TORA–13401	TODA–13401	ASDA–13401	LDA–13401
RWY 17L:TORA–8500	TODA–8500	ASDA–8500	LDA–8500
RWY 17R:TORA–13401	TODA–13401	ASDA–13401	LDA–13401
RWY 18L:TORA–13400	TODA–13400	ASDA–13400	LDA–13400
RWY 18R:TORA–13400	TODA–13400	ASDA–13400	LDA–13400
RWY 31L:TORA–9301	TODA–9301	ASDA–9301	LDA–9301
RWY 31R:TORA–8375	TODA–8375	ASDA–8375	LDA–8375
RWY 35C:TORA–13401	TODA–13401	ASDA–13401	LDA–13401
RWY 35L:TORA–13401	TODA–13401	ASDA–13401	LDA–13401
RWY 35R:TORA–8500	TODA–8500	ASDA–8500	LDA–8500
RWY 36L:TORA–13400	TODA–13400	ASDA–13400	LDA–13400
RWY 36R:TORA–13400	TODA–13400	ASDA–13400	LDA–13400

CONTINUED ON NEXT PAGE

DALLAS–FT WORTH
COPTER
H–6H, L–17C, A
IAP, AD

Figure 176. ILS-1 RWY 36L, Dallas-Fort Worth Intl.

©ASA

DALLAS-FORT WORTH, TEXAS

AL-6039 (FAA)

13122


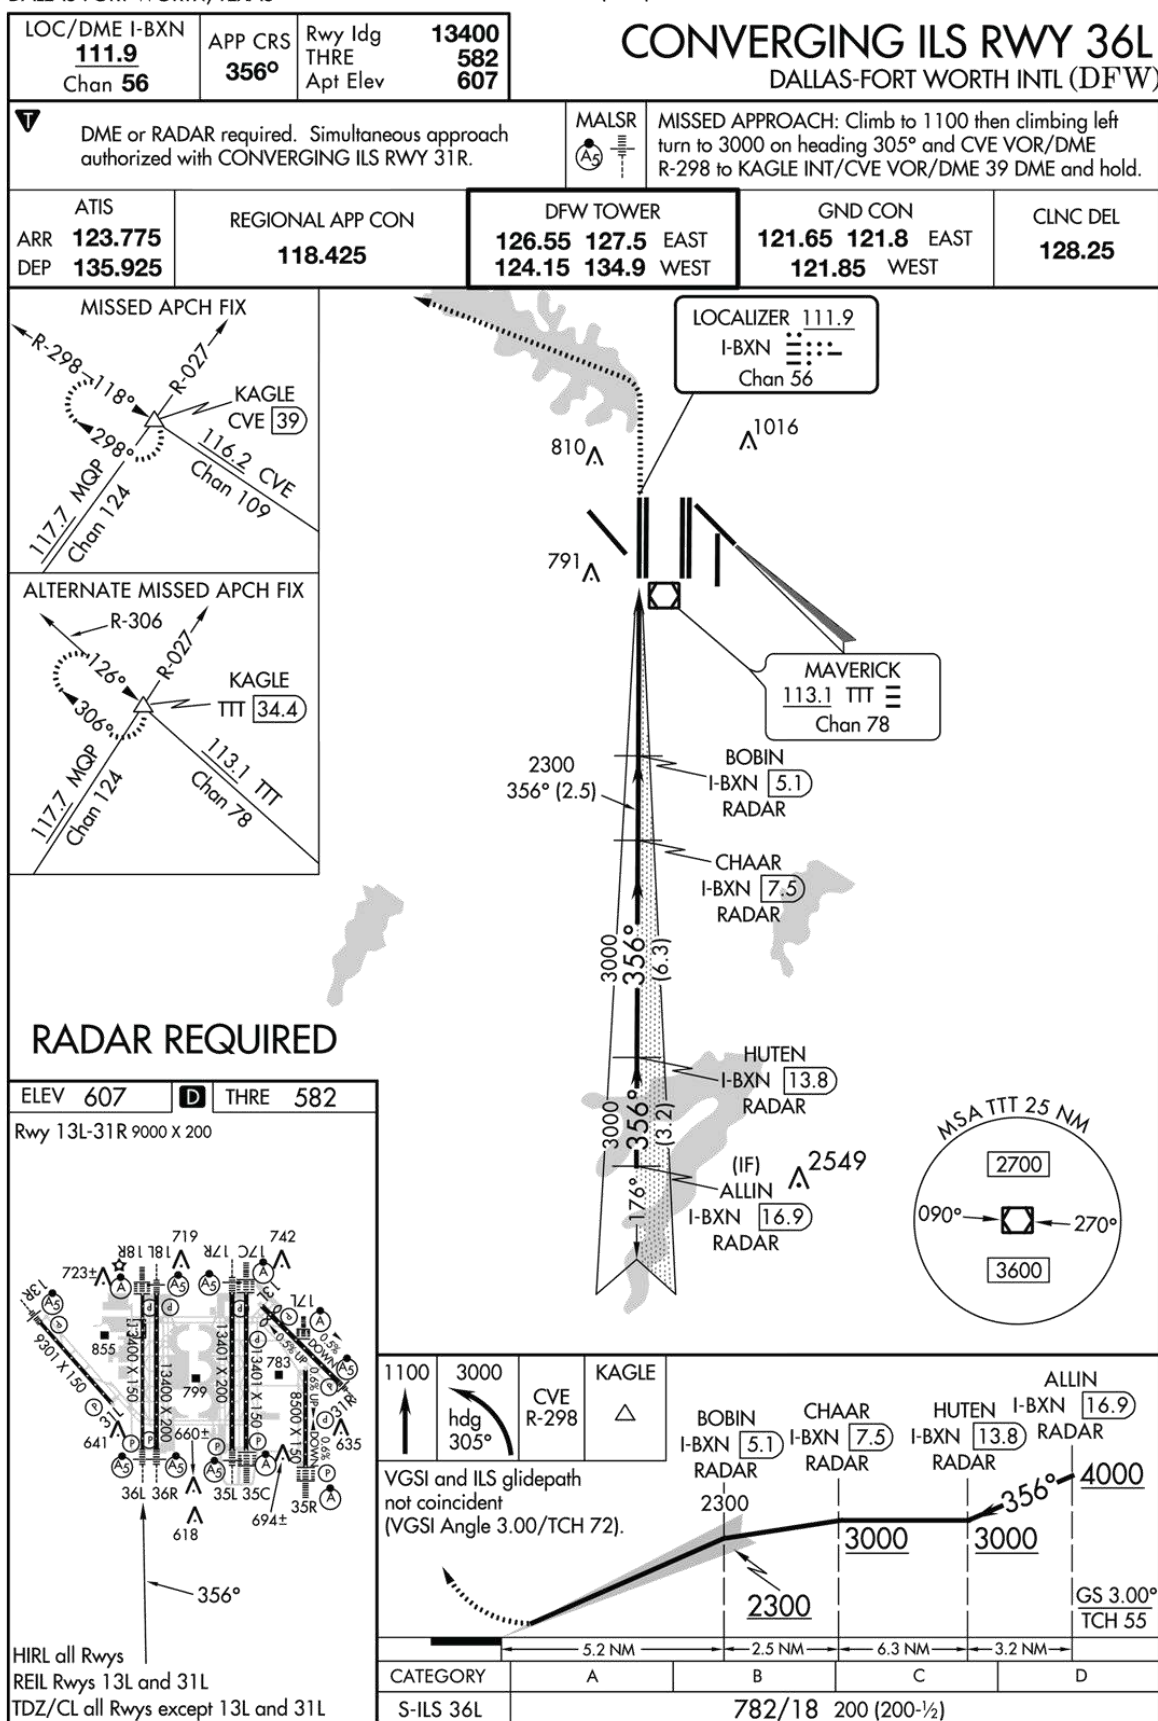


Figure 177. Converging ILS RWY 36L (DFW).

DALLAS, TEXAS

AL-106 (FAA)

13234

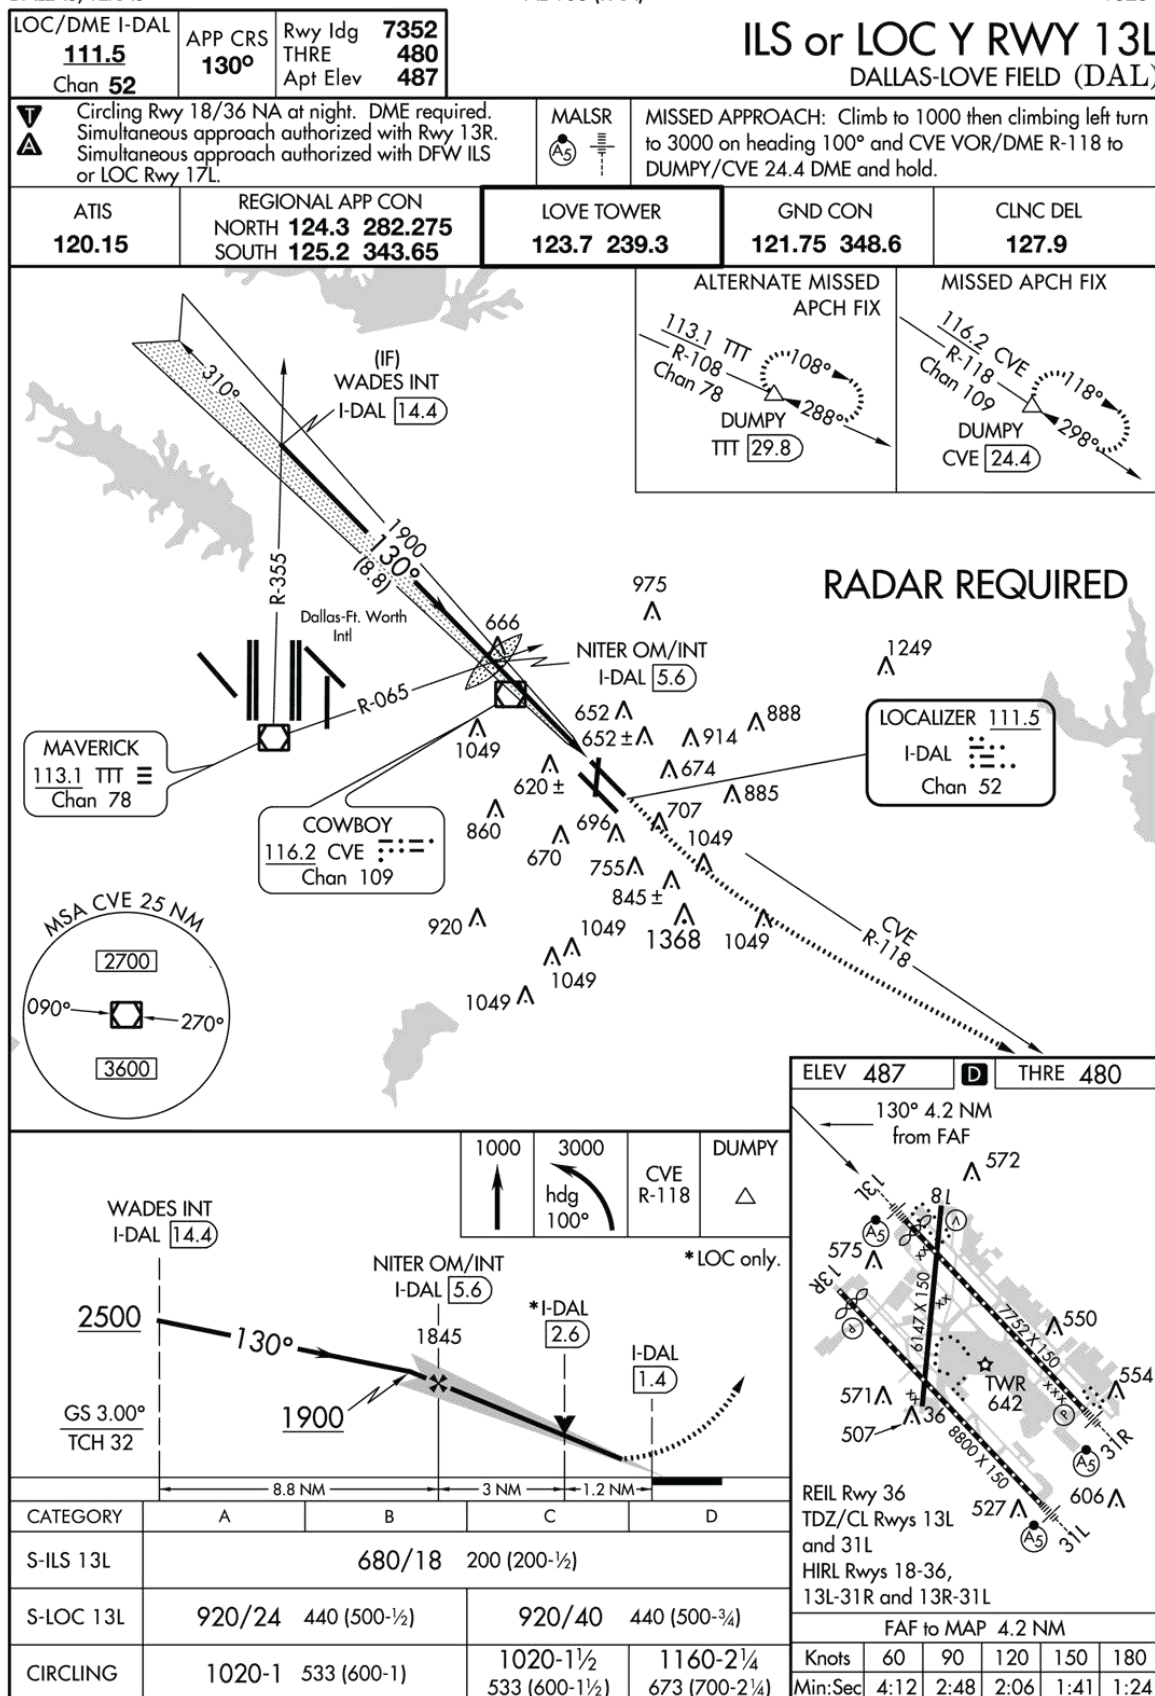

DALLAS, TEXAS

Amdt 32 27JUN13

32°51'N-96°51'W

DALLAS-LOVE FIELD (DAL)


ILS or LOC Y RWY 13L

©ASA

DALLAS, TEXAS

AL-742 (FAA)

13178

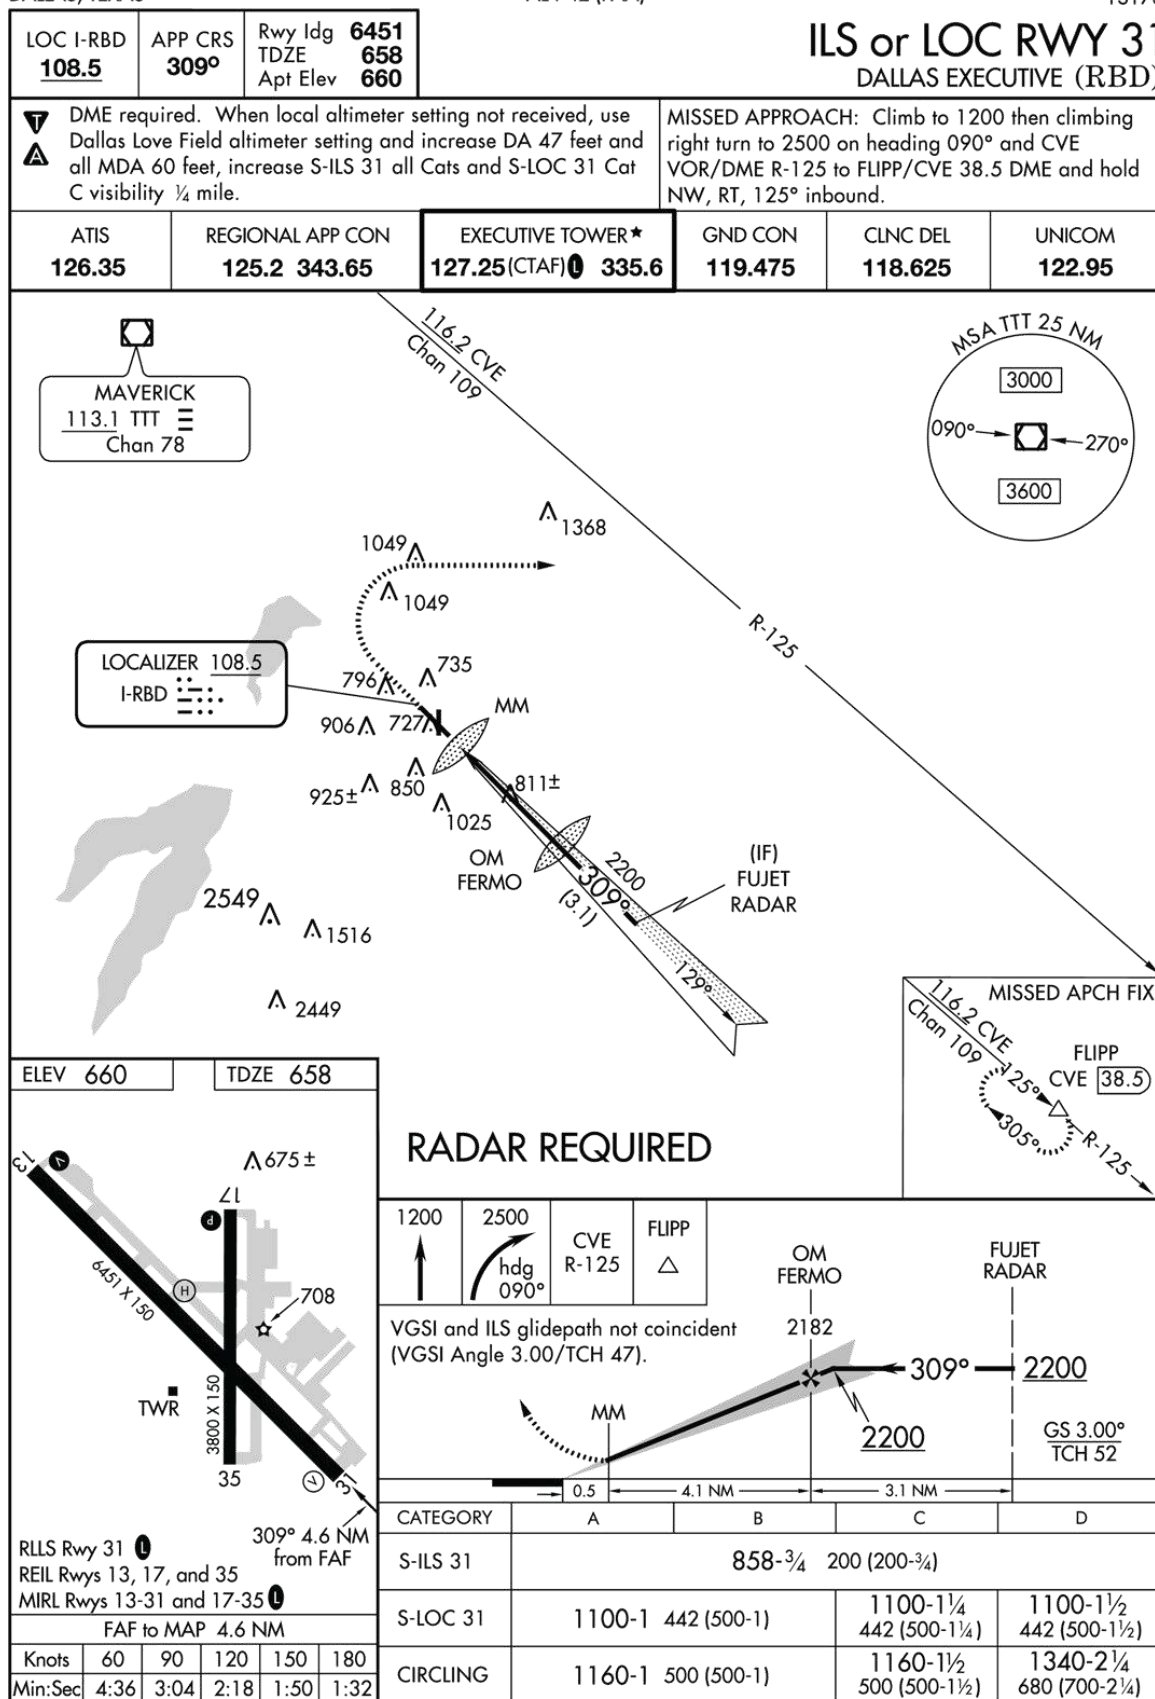

DALLAS, TEXAS
Amdt 8C 05APR12

32°41'N-96°52'W

DALLAS EXECUTIVE (RBD)
ILS or LOC RWY 31


Figure 179. ILS or LOC RWY 31 (RBD).

©ASA

ARLINGTON, TEXAS

AL-5189 (FAA)

13066

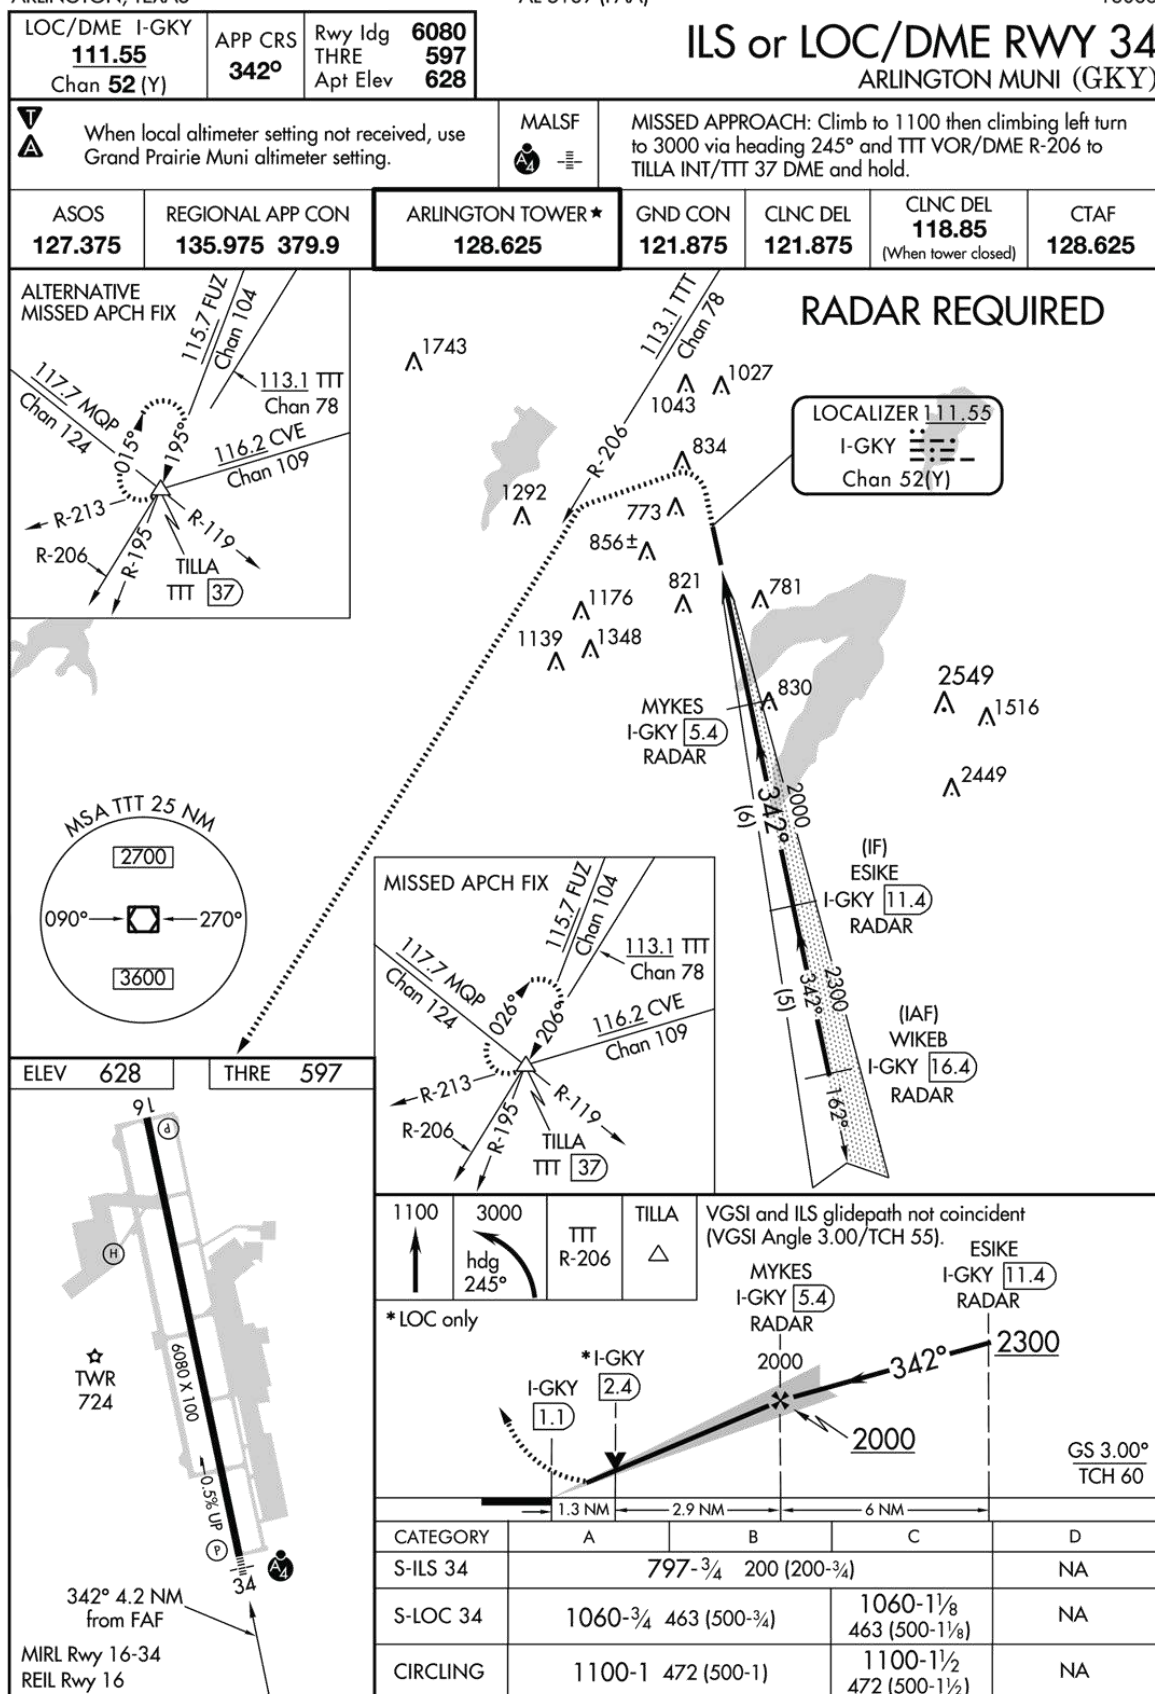

ARLINGTON, TEXAS

Amdt 2 09FEB12

32°40'N-97°06'W

ARLINGTON MUNI (GKY)

ILS or LOC/DME RWY 34

Figure 180. ILS or LOC/DME RWY 34 (GKY).

©ASA

208

TEXAS

ARCHER CITY MUNI (T39) 1 SE UTC-6(-5DT) N33°34.94' W98°37.12'
1065 S2 NOTAM FILE FTW

RWY 17-35: H3200X60 (ASPH) S-12.5

RWY 17: Road.


AIRPORT REMARKS: Unattended. Wildlife on and in/ovf arpt. 70' AGL drilling rig 700' northwest of Rwy 17-35. Rwy 17-35 loose grvl, tall grass and pot holes on rwy.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE SPS.

WICHITA FALLS (H) VORTACW 112.7 SPS Chan 74 N33°59.24' W98°35.61' 173° 24.3 NM to fld. 1133/10E.

DALLAS-FT WORTH
L-17B

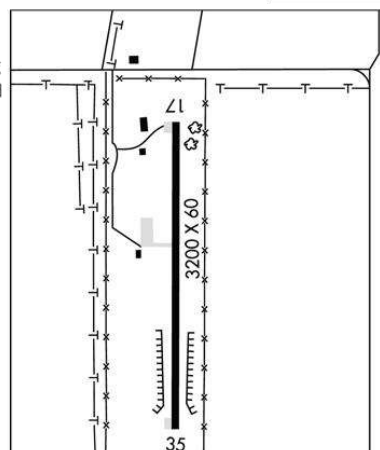

ARDYTH N27°38.54' W99°27.48' NOTAM FILE SJT.
NDB (MHW) 405 AGH 174° 5.9 NM to Laredo Intl.

BROWNSVILLE
L-20G

ARLEDGE FLD (See STAMFORD on page 351)

ARLINGTON MUNI (GKY) 4 S UTC-6(-5DT) N32°39.83' W97°05.66'
628 B S4 FUEL 100LL, JET A OX 4 TPA-1628(1000) NOTAM FILE GKY

RWY 16-34: H6080X100 (CONC) S-60 MIRL 0.5% up NW

RWY 16: REIL. PAPI(P4L)-GA 3.0° TCH 42'.

RWY 34: MALSF. PAPI(P4L)-GA 3.0° TCH 55'.

AIRPORT REMARKS: Attended continuously. Self serve fuel with major credit card. Helicopter test facility at arpt mostly from private helipad adjoining ldg area. Extensive helicopter traffic west of rwy. Rwy 34 PAPI unusable byd 8° right of centerline. MIRL Rwy 16-34 preset medium ints, higher ints by twr request. When twr clsd ACTIVATE MALSF Rwy 34-CTAF. PAPI Rwy 16 and Rwy 34 opr continuously.

WEATHER DATA SOURCES: ASOS 127.375 (817) 557-0251.

COMMUNICATIONS: CTAF 128.625

® **REGIONAL APP/DEP CON** 135.975

TOWER 128.625 (1300-0300Z±) **GND CON/CLNC DEL** 121.875

CLNC DEL 118.85 (RGNL APP CON when twr clsd)

AIRSPACE: CLASS D svc 1300-0300Z± other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE FTW.

MAVERICK (H) VORW/DME 113.1 TTT Chan 78 N32°52.15' W97°02.43' 186° 12.6 NM to fld. 540/6E.

All acft arriving DFW are requested to turn DME off until departure due to traffic overload of Maverick DME

ILS/DME 111.55 I-GKY Chan 52(Y) Rwy 34. Class IE. LOC unusable byd 15° right of course. Unmonitored when ATCT clsd.

DALLAS-FT WORTH
COPTER
H-6H, L-17C, A
IAP, AD

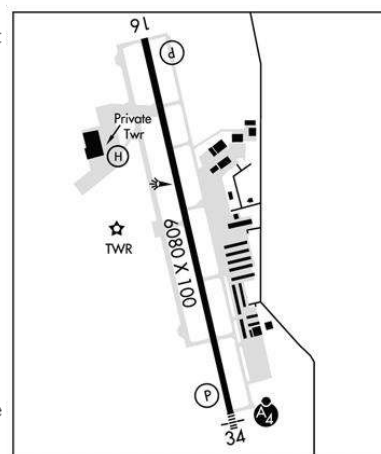



Figure 181. Excerpt from Chart Supplement.

©ASA

(GROMO3.GROMO) 12320

GROMO THREE DEPARTURE

YAKIMA AIR TERMINAL/MCALLISTER FIELD (YKM)
SL-465 (FAA) YAKIMA, WASHINGTON

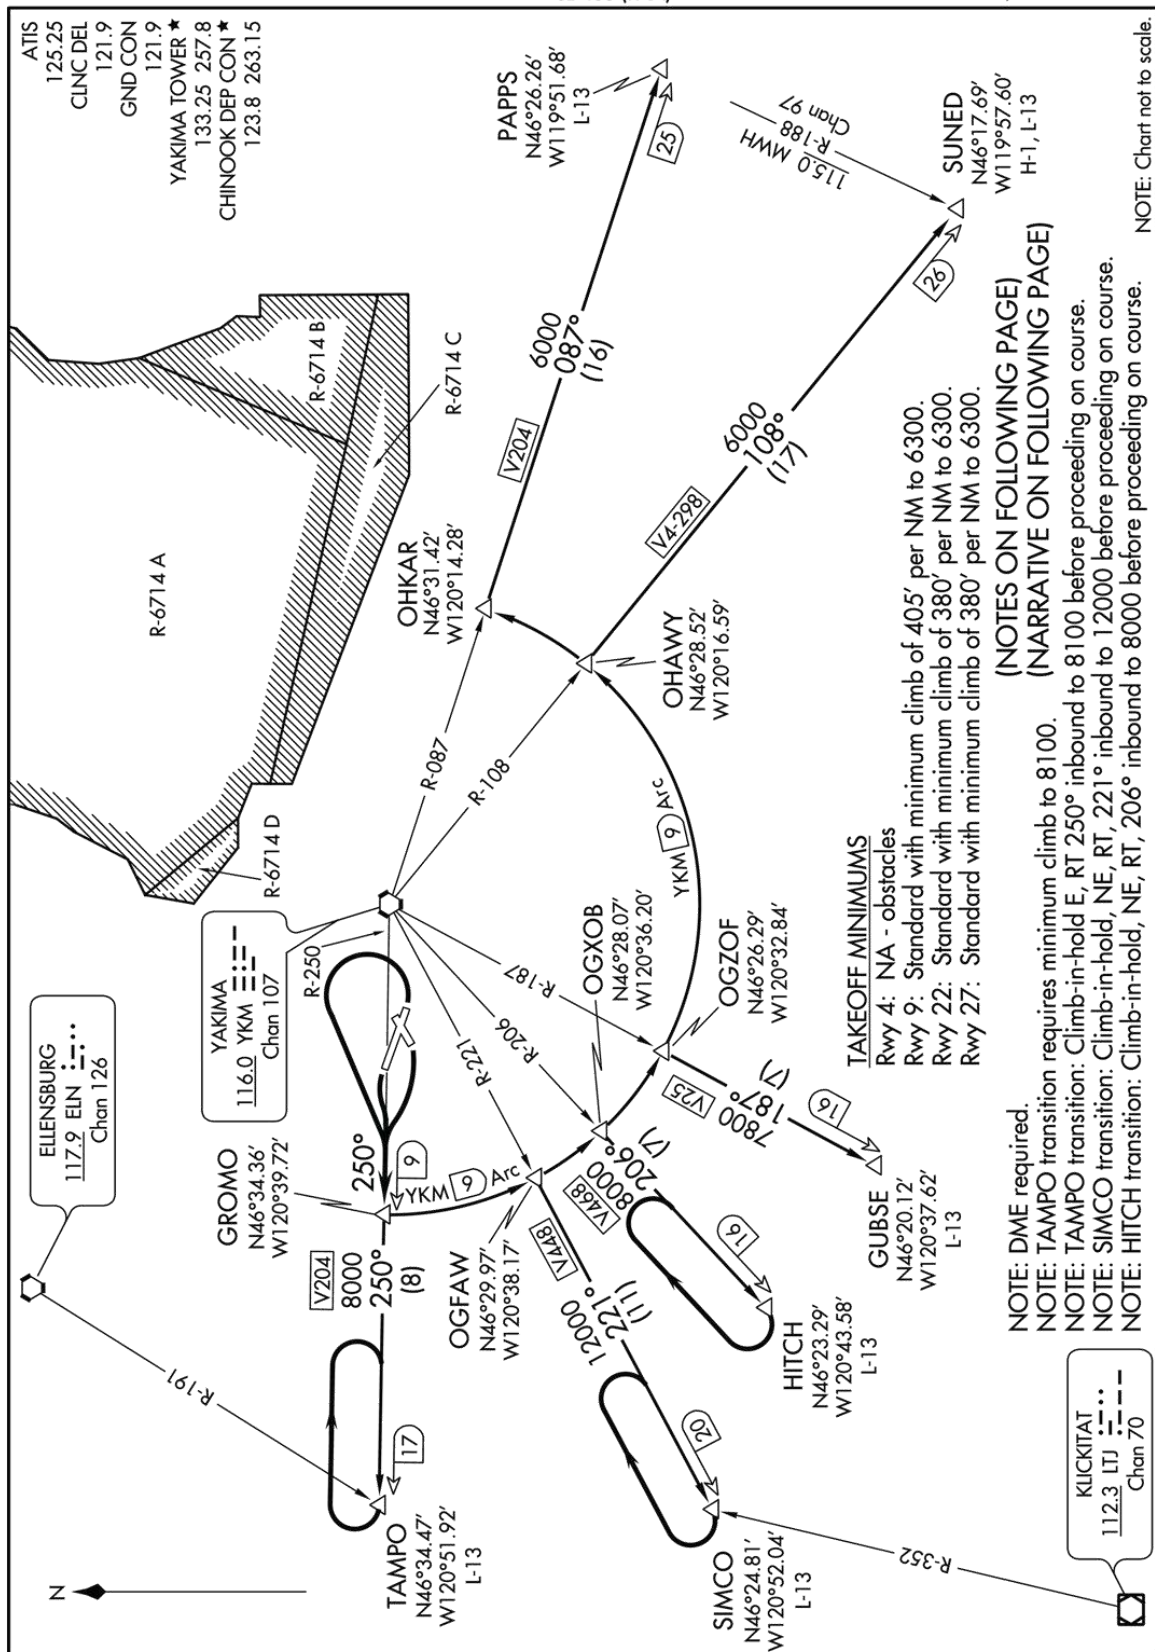

GROMO THREE DEPARTURE

(GROMO3.GROMO) 12320

YAKIMA, WASHINGTON
YAKIMA AIR TERMINAL/MCALLISTER FIELD (YKM)

Figure 182. GROMO Three Departure (GROMO3.GROMO).

©ASA

(GROMO3.GROMO) 12208

GROMO THREE DEPARTURE

YAKIMA AIR TERMINAL/MCALLISTER FIELD (YKM)
SL-465 (FAA) YAKIMA, WASHINGTON



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 9,27: Climbing left turn thence. . . .

TAKEOFF RUNWAY 22: Climbing right turn thence. . . .

. . . . intercept and proceed via YKM R-250 to GROMO/YKM 9 DME,
then on assigned transition.

GUBSE TRANSITION (GROMO3.GUBSE): From over GROMO DME Fix via YKM 9 DME
Arc to OGZOF DME fix and YKM VORTAC R-187 to GUBSE DME fix.

HITCH TRANSITION (GROMO3.HITCH): From over GROMO DME Fix via YKM 9 DME
Arc to OGXOB DME fix and YKM VORTAC R-206 to HITCH DME fix.

PAPPS TRANSITION (GROMO3.PAPPS): From over GROMO DME Fix via YKM 9 DME
Arc to OKHAR DME fix and YKM VORTAC R-087 to PAPPS DME fix.

SIMCO TRANSITION (GROMO3.SIMCO): From over GROMO DME Fix via YKM 9 DME
Arc to OGFAW DME fix and YKM VORTAC R-221 to SIMCO INT.

SUNED TRANSITION (GROMO3.SUNED): From over GROMO DME Fix via 9 DME
Arc to OHAWY DME fix and KM R-108 to SUNED INT.

TAMPO TRANSITION (GROMO3.TAMPO): From over GROMO DME Fix via
YKM VORTAC R-250 to TAMPO INT.

TAKEOFF OBSTACLE NOTES

Rwy 9: OL on building 27' from DER, 507' right of centerline, 34' AGL/1074' MSL.

Pole 388' from DER, 561' right of centerline, 34' AGL/1073' MSL.

Trees beginning 586' from DER, 550' right of centerline, up to 100' AGL/1139' MSL.

Rwy 22: Fence beginning 27' from DER, 435' right of centerline, up to 10' AGL/1085' MSL.

Trees beginning 570' from DER, 228' left of centerline, up to 100' AGL/1199' MSL.

Trees beginning 3195' from DER, 202' right of centerline, up to 100' AGL/1199' MSL.

Trees beginning 1 NM from DER, 732' left of centerline, up to 100' AGL/1239' MSL.

Rwy 27: Ant on building 398' from DER, 282' left of centerline, 15' AGL/1117' MSL.

Trees beginning 3893' from DER, 1341' right of centerline, up to 100' AGL/1239' MSL.

GROMO THREE DEPARTURE

(GROMO3.GROMO) 12208

YAKIMA, WASHINGTON
YAKIMA AIR TERMINAL/MCALLISTER FIELD (YKM)

Figure 183. GROMO Three Departure (GROMO3.GROMO).

©ASA

200

WASHINGTON

YAKIMA AIR TERMINAL/MCALLISTER FLD (YKM) 3 S UTC-8(-7DT) N46°34.09' W120°32.64' **SEATTLE**
1099 B S4 FUEL 100LL, JET A OX 1, 3 Class I, ARFF Index A NOTAM FILE YKM **H-1C, L-13A**
RWY 09-27: H7604X150 (ASPH-GRVD) S-95, D-160, 2S-175, 2D-220, 2D/2D2-550 PCN 33 F/C/X/T **IAP, DIAP, AD**
HIRL 0.7% up W
RWY 09: REIL. VASI(V4L)—GA 3.0° TCH 50'.
RWY 27: MALSR. PAPI(P4L)—GA 3.0° TCH 57'.
RWY 04-22: H3835X150 (ASPH-PFC) S-70, D-80, 2S-102, 2D-120 PCN 28 F/C/X/T MIRL 0.5% up SW
RWY 04: REIL. PAPI(P4L)—GA 3.0° TCH 57'.
RWY 22: REIL. PAPI(P4L)—GA 3.0° TCH 45'.
RUNWAY DECLARED DISTANCE INFORMATION
RWY 04: TORA-3835 TODA-3835 ASDA-3835 LDA-3835
RWY 09: TORA-7604 TODA-7604 ASDA-7604 LDA-7604
RWY 22: TORA-3835 TODA-3835 ASDA-3535 LDA-3835
RWY 27: TORA-7604 TODA-7604 ASDA-7604 LDA-7604
AIRPORT REMARKS: Attended 1400-0400Z†. Sfc conditions unmonitored 0800-1330Z†. Be alert, birds invof Yakima River 5 NM east of apch to Rwy 27. Reflectors on Twy C only. Rwy 04-22 some spalling and raveling. PPR for unscheduled air carrier ops with more than 30 passenger seats, call arpt manger 509-575-6149/6150. Twy B from apch end of Rwy 22 to Twy A rstd to acft with wingspans 79' or less. MIRL Rwy 04-22, REIL Rwy 04 and Rwy 22, PAPI Rwy 04 and Rwy 22 OTS when twr clsd. Twy B1 and Twy B2 twy lgts OTS when twr clsd. Twy B lgts south of Rwy 09-27 OTS when twr clsd. When twr clsd ACTIVATE HIRL Rwy 09-27 and MALSR Rwy 27—CTAF.
WEATHER DATA SOURCES: ASOS (509) 248-1502
COMMUNICATIONS: CTAF 133.25 ATIS 125.25 UNICOM 122.95
RCO 122.5 (SEATTLE RADIO)
Ⓡ CHINOOK APP/DEP CON 123.8 (1400-0600Z†)
Ⓡ SEATTLE CENTER APP/DEP CON 132.6 (0600-1400Z†)
TOWER 133.25 (1400-0600Z†) GND CON 121.9 CLNC DEL 121.9
AIRSPACE: CLASS D svc 1400-0600Z† other times CLASS E.
RADIO AIDS TO NAVIGATION: NOTAM FILE YKM.
(H) VORTACW 116.0 YKM Chan 107 N46°34.21' W120°26.68' 247° 4.1 NM to fld. 984/21E.
DME unusable:
095°-115° byd 26 NM blo 8,000'
095°-115° byd 35 NM
115°-207° byd 20 NM blo 8,500'
115°-207° byd 36 NM blo 10,000'
207°-230° byd 20 NM blo 10,000'
290°-315° byd 20 NM blo 11,000'
315°-080° byd 12 NM blo 15,000'
VOR portion unusable:
025°-035° byd 5 NM blo 6,000'
080°-105° byd 35 NM blo 6,000'
105°-107° byd 25 NM blo 6,000'
109°-135° byd 25 NM blo 6,000'
135°-180° byd 30 NM blo 7,500'
195°-225° byd 30 NM blo 8,500'
305°-335° byd 30 NM blo 9,000'
350°-080° byd 25 NM blo 9,000'
DONNY NDB (LOM) 371 YK N46°31.54' W120°22.33' 274° 7.6 NM to fld. Unmonitored when ATCT closed.
ILS 110.1 I-YKM Rwy 27. LOM DONNY NDB. Unmonitored when ATCT closed.
COMM/NAV/WEATHER REMARKS: During hrs twr is clsd all ops in vicinity of arpt rstd to acft with VHF radio capability, unless an emerg exist necessitating UHF equipped acft to land.

Figure 184. Excerpt from Chart Supplement.


©ASA

13290

AIRPORT DIAGRAM

AL-330 (FAA)

PORTLAND INTL (PDX)
PORTLAND, OREGON

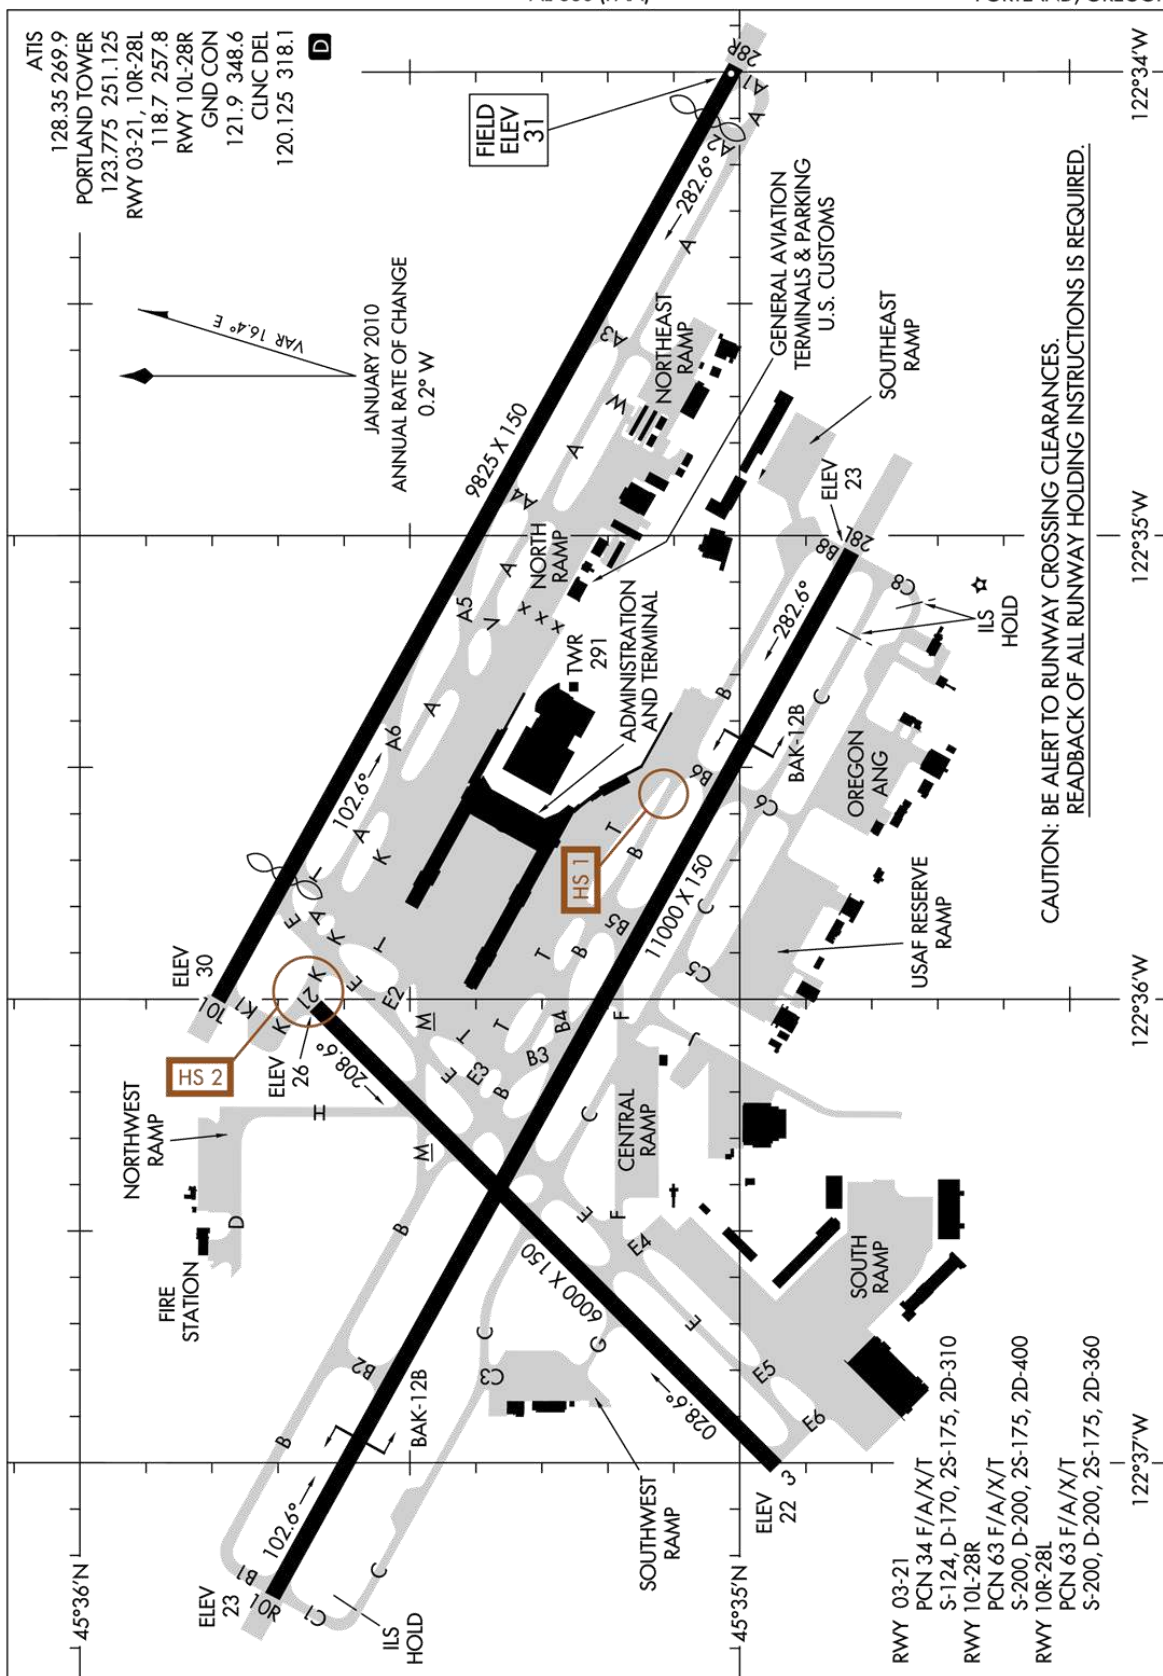


AIRPORT DIAGRAM

PORTLAND, OREGON
PORTLAND INTL (PDX)

13290

Figure 185. Airport Diagram - Portland INTL (PDX).

©ASA

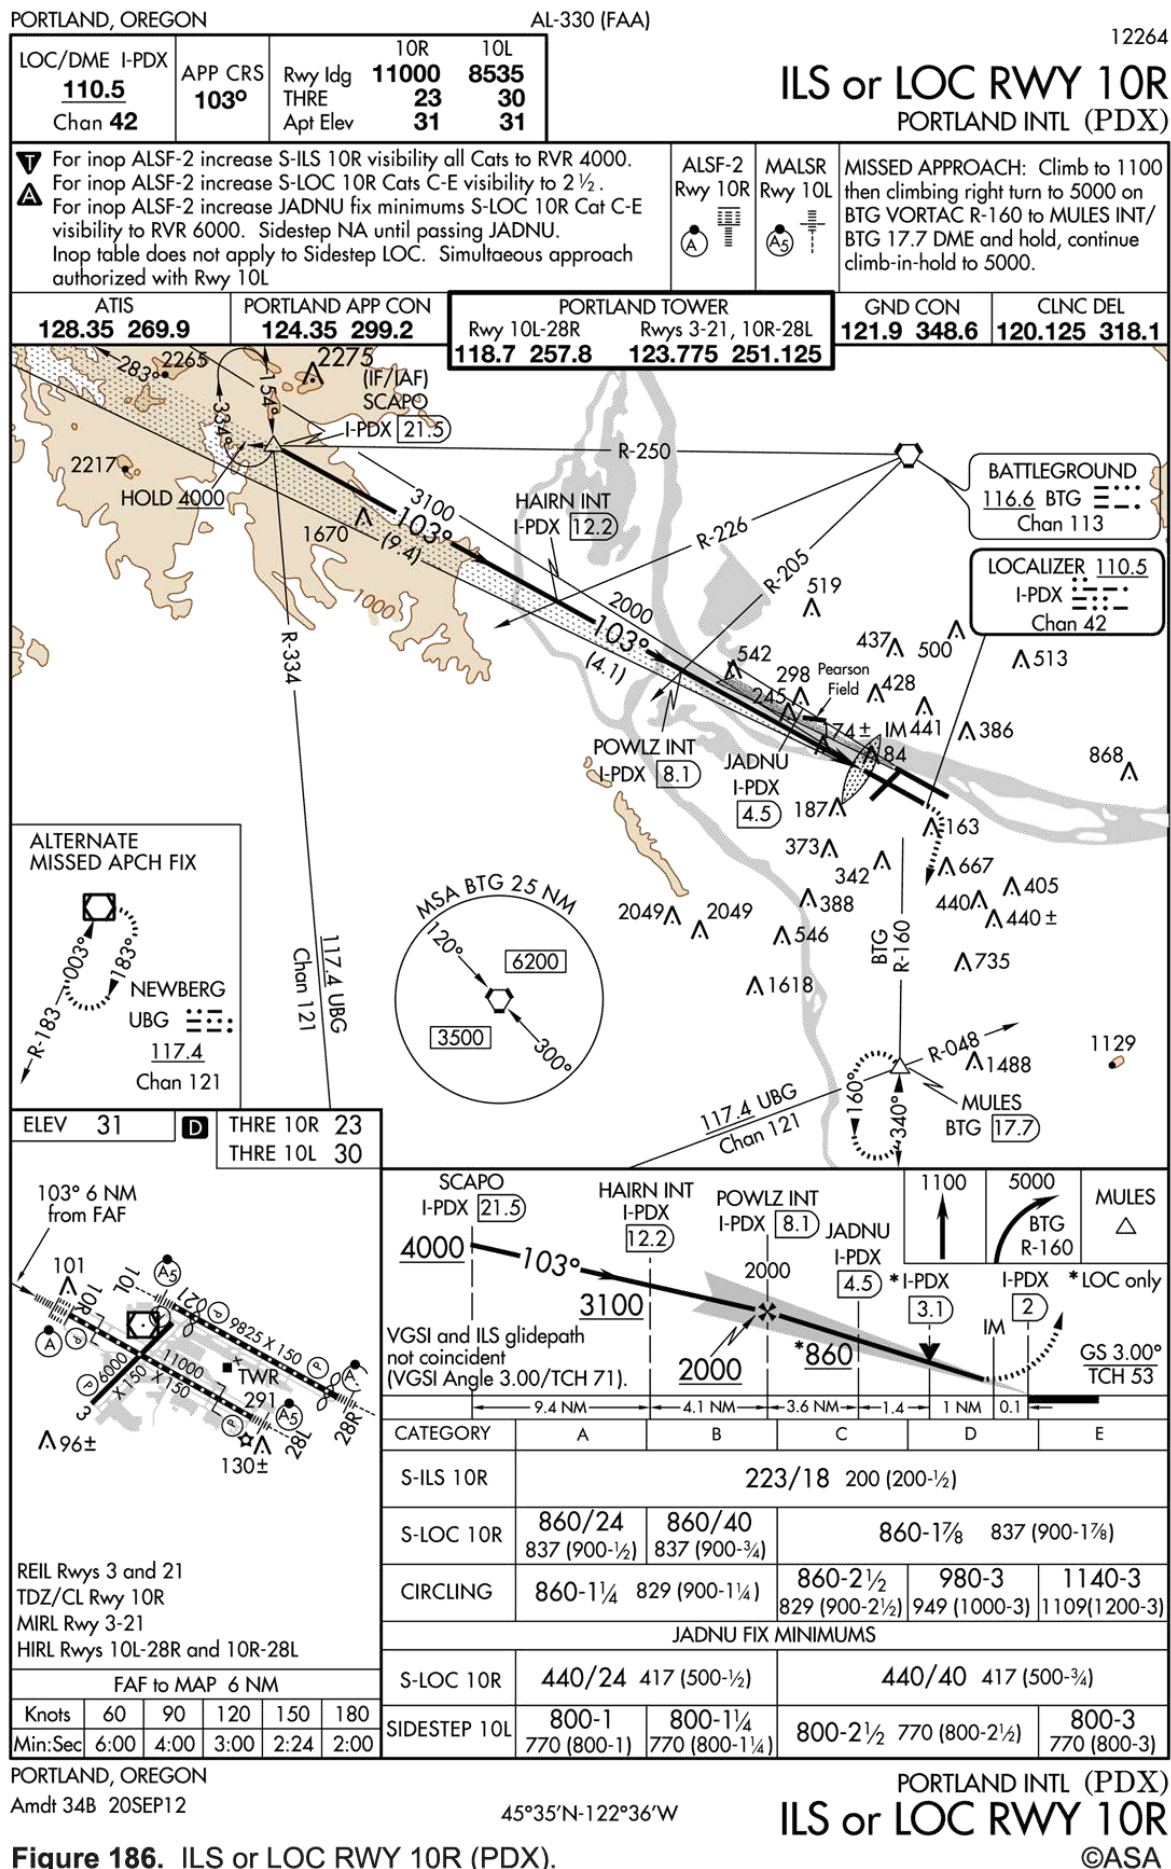

PORTLAND, OREGON

AL-330 (FAA)

13122

WAAS CH 56205 W28B	APP CRS 283°	Rwy Idg 11000 THRE 23 Apt Elev 31
--	------------------------	--

RNAV (GPS) X RWY 28L


PORTLAND INTL (PDX)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°). For inoperative MALSR, increase LPV all Cats visibility to RVR 4500 and increase LNAV/VNAV all Cats visibility to 1½ mile and increase LNAV Cats A, B visibility to RVR 5500. DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 28R. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.





MISSED APPROACH: Climb to 2100, then climbing left turn to 4000 direct UBG VOR/DME and hold.

ATIS 128.35 269.9	PORTLAND APP CON 124.35 299.2	PORTLAND TOWER Rwy 10L-28R 118.7 257.8 Rwys 3-21, 10R-28L 123.775 251.125	GND CON 121.9 348.6	CLNC DEL 120.125 318.1
-----------------------------	---	---	-------------------------------	----------------------------------

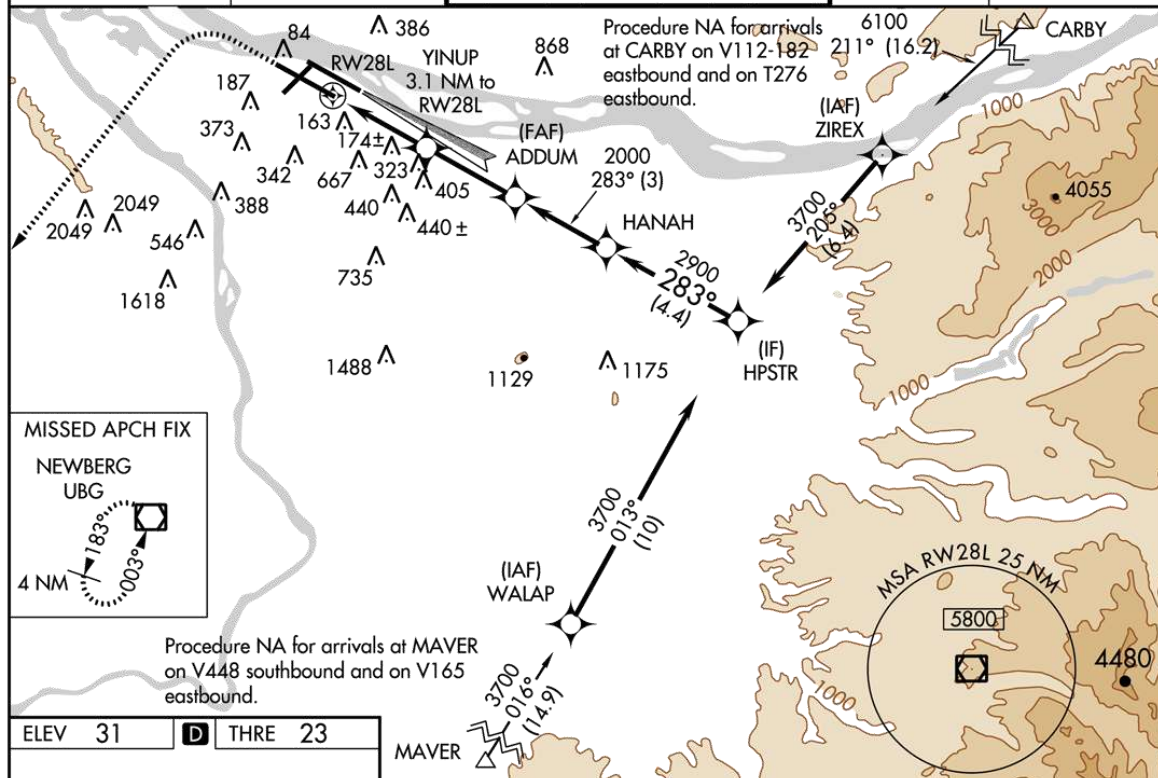

ELEV 31 **D** THRE 23

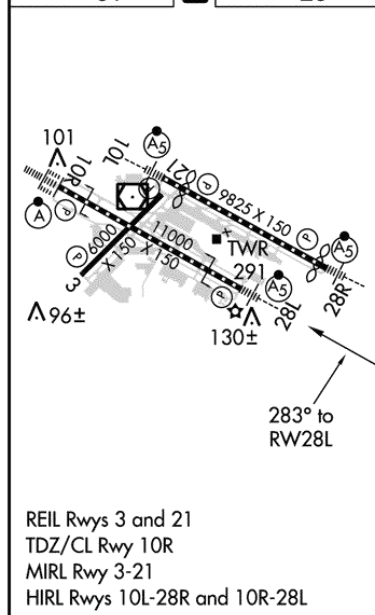

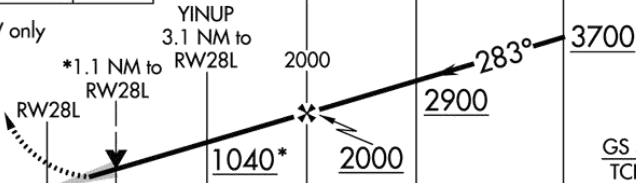2100 ↑	4000 ↘	UBG 	VGSI and RNAV glidepath not coincident. (VGSI Angle 3.00/TCH 72).			
* LNAV only						
CATEGORY	A		B		C	D
LPV DA			309/24 286 (300-½)			
LNAV/ VNAV DA			507-1½ 484 (500-1½)			
LNAV MDA	440/24 417 (500-½)		440/40 417 (500-¾)			
CIRCLING	720-1 689 (700-1)	740-1 709 (800-1)	760-2 729 (800-2)	980-3 949 (1000-3)		

PORTLAND, OREGON

Amdt 2 20SEP12

45°35'N-122°36'W

PORTLAND INTL (PDX)

RNAV (GPS) X RWY 28L

©ASA

Figure 187. RNAV (GPS) X RWY 28L (PDX).

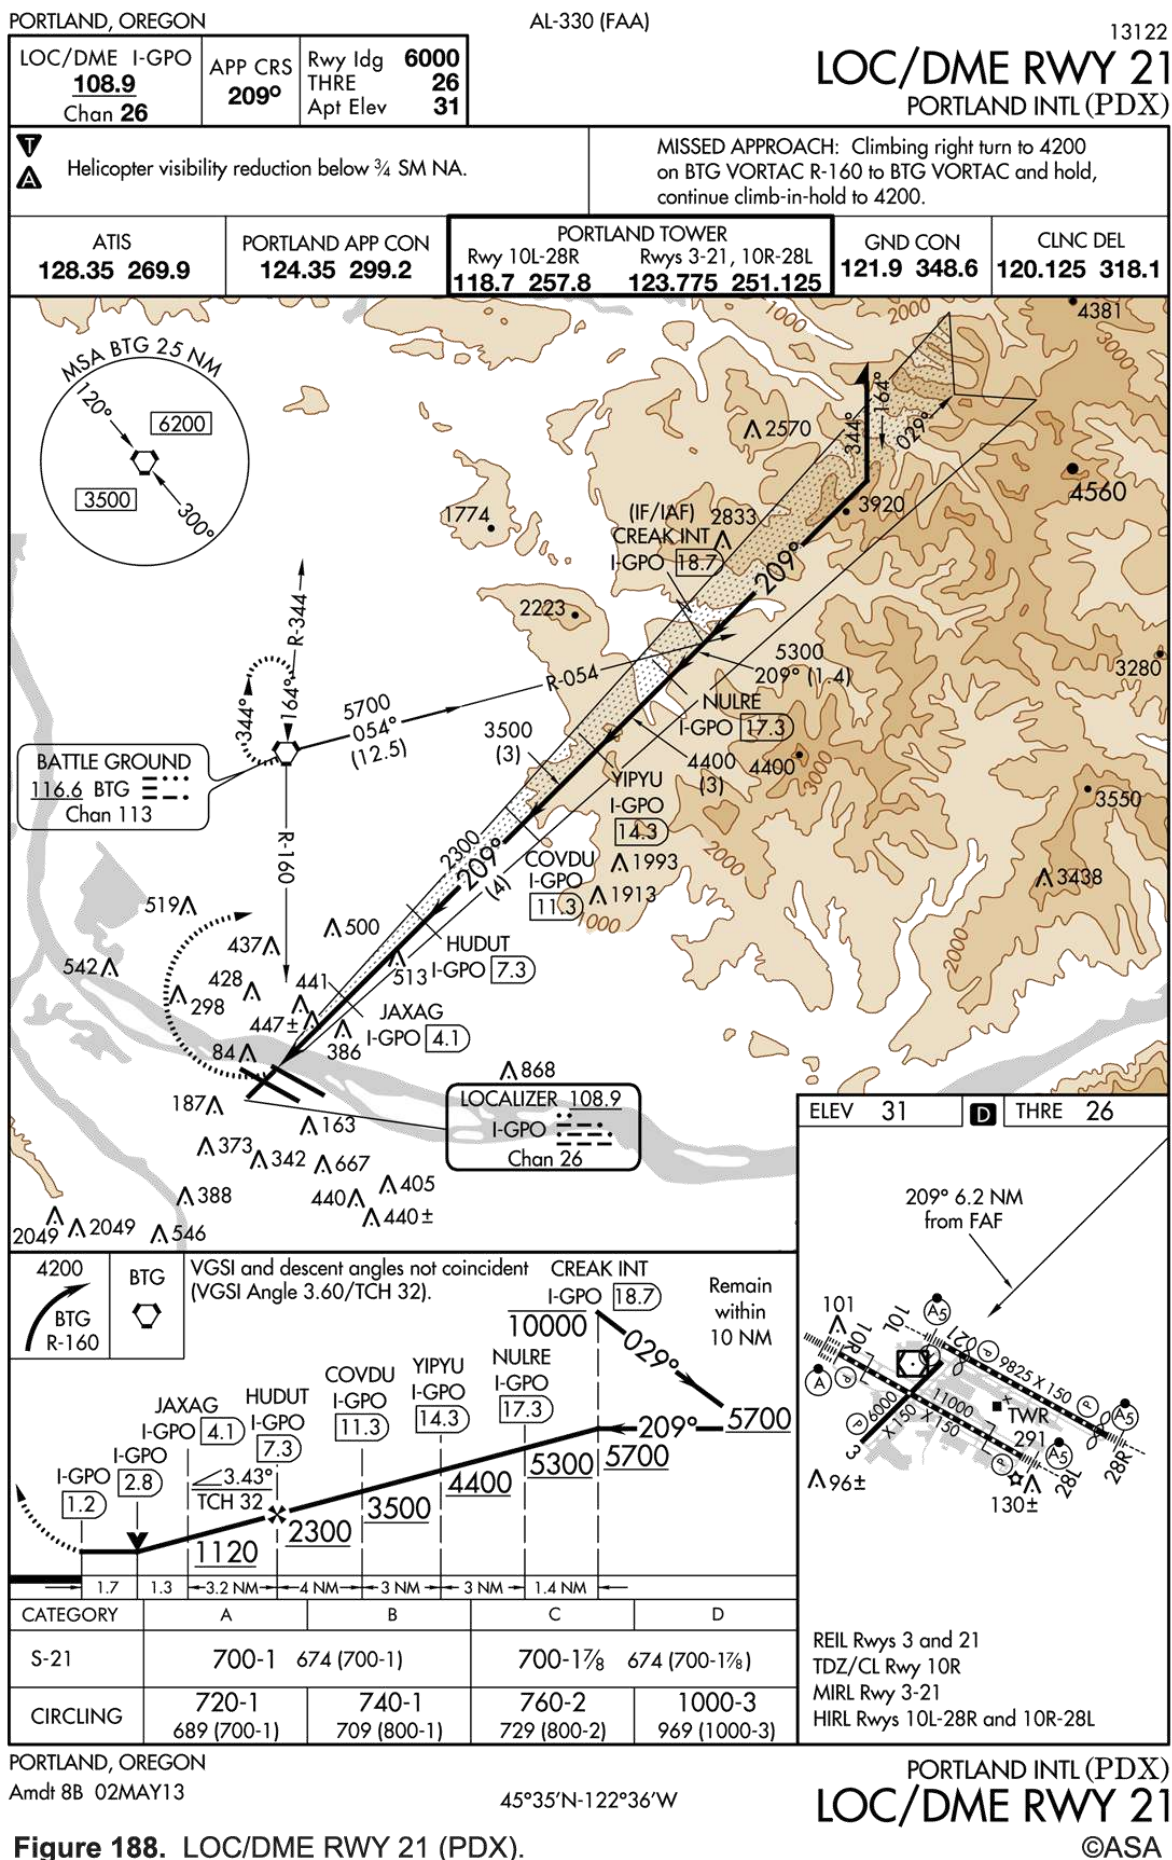


Figure 188. LOC/DME RWY 21 (PDX).

(HABUT4.GVO) 13122


HABUT FOUR DEPARTURE

SL-378 (FAA)

SANTA BARBARA MUNI (SBA)

SANTA BARBARA, CALIFORNIA

ATIS 132.65
CLNC DEL
132.9
GND CON
121.7
SANTA BARBARA TOWER ★
119.7 (CTAF) 254.35
SANTA BARBARA DEP CON
120.55 319.15

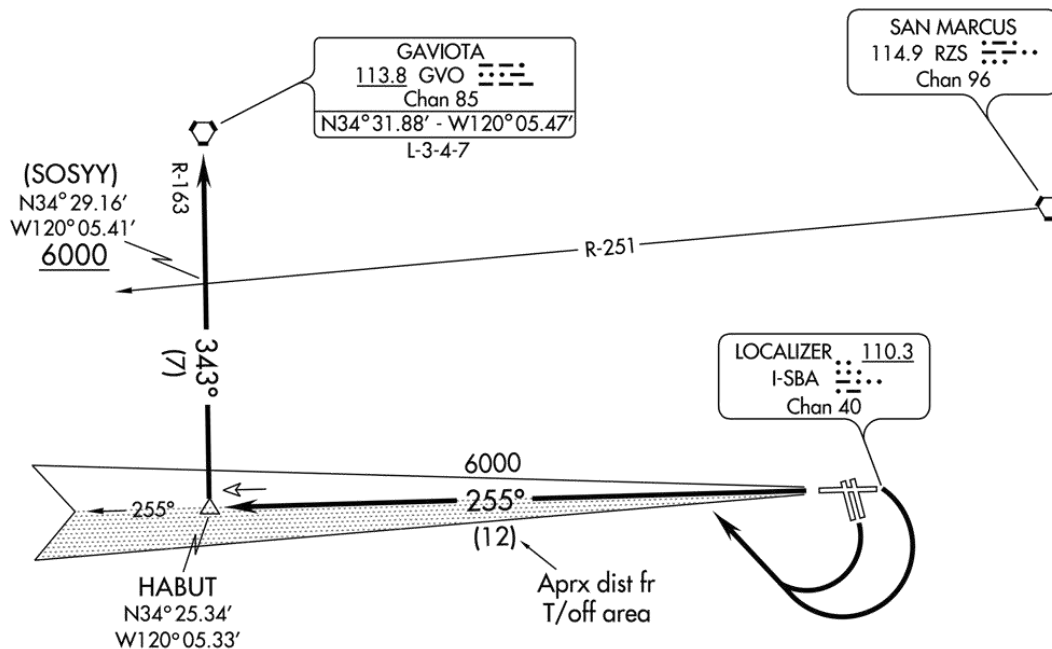

NOTE: IFR departure Rwy 33L/R not authorized.

NOTE: Minimum (ATC) climb of 385' per NM to 6000.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAYS 7 and 15L/R: Turn right, intercept I-SBA west course to HABUT INT, thence via GVO R-163 to GVO VORTAC. Cross RZS R-251 at or above 6000'.

TAKE-OFF RUNWAY 25: Intercept I-SBA west course to HABUT INT, thence via GVO R-163 to GVO VORTAC. Cross RZS R-251 at or above 6000'.

HABUT FOUR DEPARTURE

(HABUT4.GVO) 13122

SANTA BARBARA, CALIFORNIA
SANTA BARBARA MUNI (SBA)

Figure 189. HABUT Four Departure (HABUT4.GVO) (SBA).

©ASA

186


CALIFORNIA

SANTA BARBARA MUNI (SBA) 7 W UTC-8(-7DT) N34°25.57' W119°50.49' **LOS ANGELES**
13 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks LRA Class I, ARFF Index C H-4H, L-3D, 4E, 7A
NOTAM FILE SBA IAP, AD

RWY 07-25: H6052X150 (ASPH-PFC) S-110, D-160, 2S-175, 2D-245 HIRL
RWY 07: MALSR. Tree. Rgt tfc.
RWY 25: REIL. PAPI(P4L)—GA 3.0° TCH 50'. Fence.
RWY 15R-33L: H4184X100 (ASPH) S-48, D-63, 2S-80, 2D-100 MIRL
RWY 15R: REIL. Tree.
RWY 33L: Tree. Rgt tfc.
RWY 15L-33R: H4178X75 (ASPH) S-35, D-41, 2S-80, 2D-63
RWY 15L: Thld dsplcd 217'. Bldg.
RWY 33R: Rgt tfc.

AIRPORT REMARKS: Attended 1330-0600Z†. 100LL fuel 24 hr credit card svc avbl. Fee for Jet A fuel after hrs call 805-964-6733 or 967-5608. Numerous flocks of birds on and invof arpt. Deep creek located 300' from rwy end Rwy 07, Rwy 33L and Rwy 33R. Rwy 15L-33R dalgt hrs only. Arpt has noise abatement procedures ctc arpt ops 805-692-6005. Due to ltd ramp space at the airline terminal non-scheduled transport category acft with more than 30 passenger seats are required to ctc arpt ops 805-692-6005 24 hour PPR to arrival. Commercial airline ramp clsd to all General Aviation acft. No customs personnel or facilities are avbl and international acft will not be allowed to land unless an emerg exists. TPA—1003(990) small acft, 1503(1490) large acft. Pure jet touch/go or low approaches prohibited. When twr clsd ACTIVATE MIRL Rwy 15R-33L, REIL Rwy 15R—CTAF. MALSR Rwy 07, PAPI Rwy 25 and REIL Rwy 25 opr continuously. CTAF. Ldg fee for all PART 135 opr and transient acft with maximum gross weight 10,000 lbs or more. Fees collected at FBO.

WEATHER DATA SOURCES: ASOS (805) 681-0583
COMMUNICATIONS: CTAF 119.7 ATIS 132.65 UNICOM 122.95
① APP/DEP CON 120.55 (151°-329°) 125.4 (330°-150°) 124.15 127.725 (1400-0700Z†)
① L.A. CENTER APP/DEP CON 119.05 (0700-1400Z†)
TOWER 119.7 (1400-0700Z†) GND CON 121.7 CLNC DEL 132.9
AIRSPACE: CLASS C svc ctc APP CON svc 1400-0700Z† other times CLASS E.
RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.
SAN MARCUS (H) VORTAC 114.9 RZS Chan 96 N34°30.57' W119°46.26' 201° 6.1 NM to fld. 3623/14E.
HIWAS.
VOR unusable:
140°-178° byd 27 NM
GAVIOTA (L) VORTACW 113.8 GVO Chan 85 N34°31.88' W120°05.47' 101° 13.9 NM to fld. 2616/16E.
VORTAC unusable:
117°-137° byd 35 NM
310°-095° byd 10 NM blo 8,500'
360°-095° byd 20 NM blo 12,500'
ILS/DME 110.3 I-SBA Chan 40 Rwy 07. Class IA. Unmonitored when ATCT clsd.

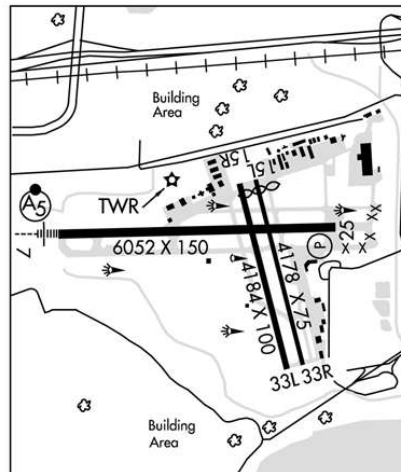

SANTA CATALINA N33°22.50' W118°25.19' NOTAM FILE HHR. **LOS ANGELES**
(L) VORTACW 111.4 SXC Chan 51 352° 1.8 NM to Catalina. 2090/15E. H-4I, L-3E, 4G

Figure 190. Excerpt from Chart Supplement.

©ASA

PASO ROBLES, CALIFORNIA

AL-858 (FAA)

11069

WAAS CH 65819 W19A	APP CRS 194°	Rwy Idg TDZE Apt Elev	6008 804 840
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 19

PASO ROBLES MUNI (PRB)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 38°C (100°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climb to 1800 then climbing left turn to 6500 direct NEFDE and hold, continue climb-in-hold to 6500.

ASOS 120.125	OAKLAND CENTER 128.7 307.0	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

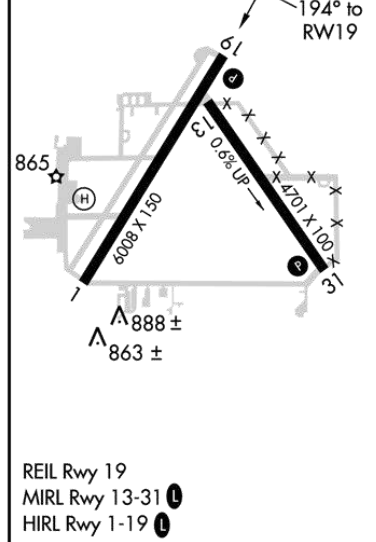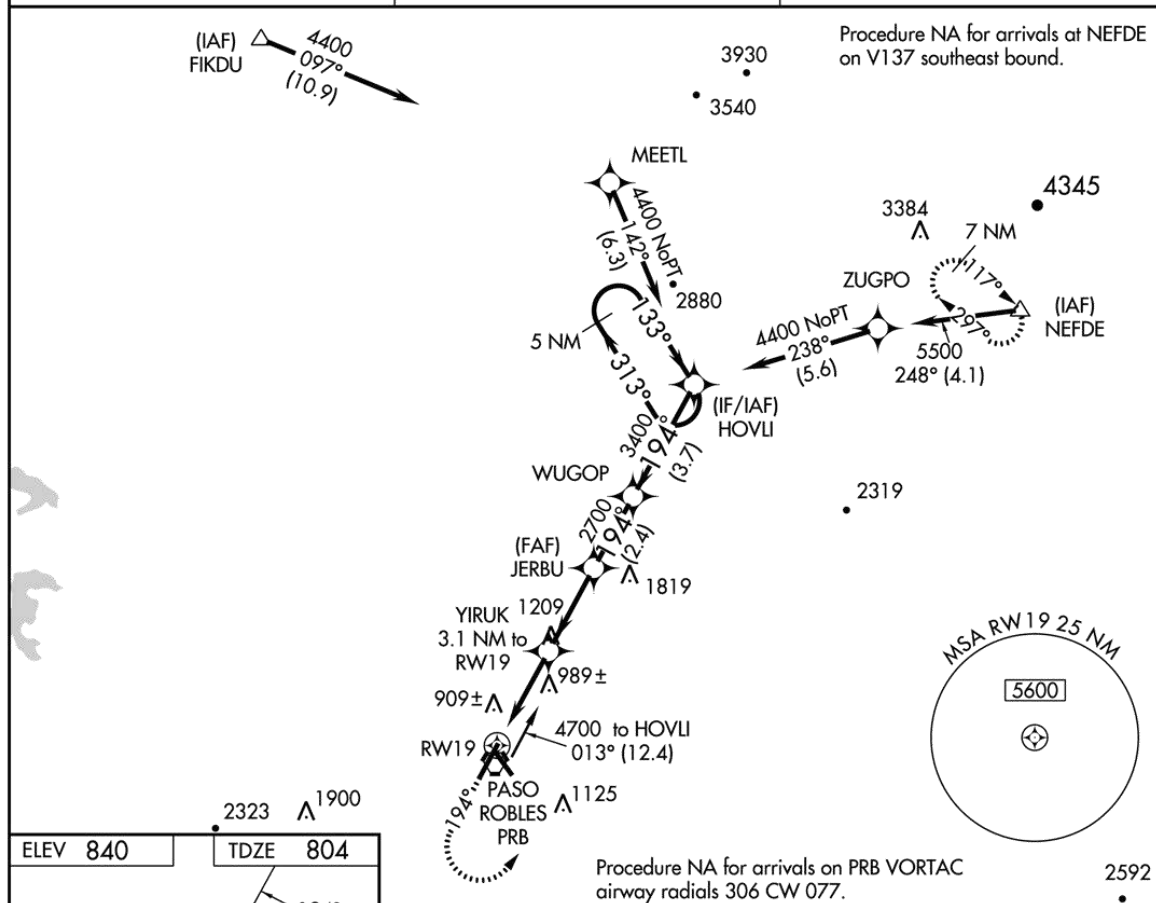

PASO ROBLES, CALIFORNIA

Amdt 1 13JAN11

35°40'N-120°38'W

RNAV (GPS) RWY 19

©ASA

Figure 191. RNAV (GPS) RWY 19 (PRB).


PASO ROBLES, CALIFORNIA

AL-858 (FAA)

11069

VORTAC PRB 114.3 Chan 90	APP CRS 313°	Rwy Idg TDZE Apt Elev N/A N/A 840
--	------------------------	---

VOR/DME-B
PASO ROBLES MUNI (PRB)

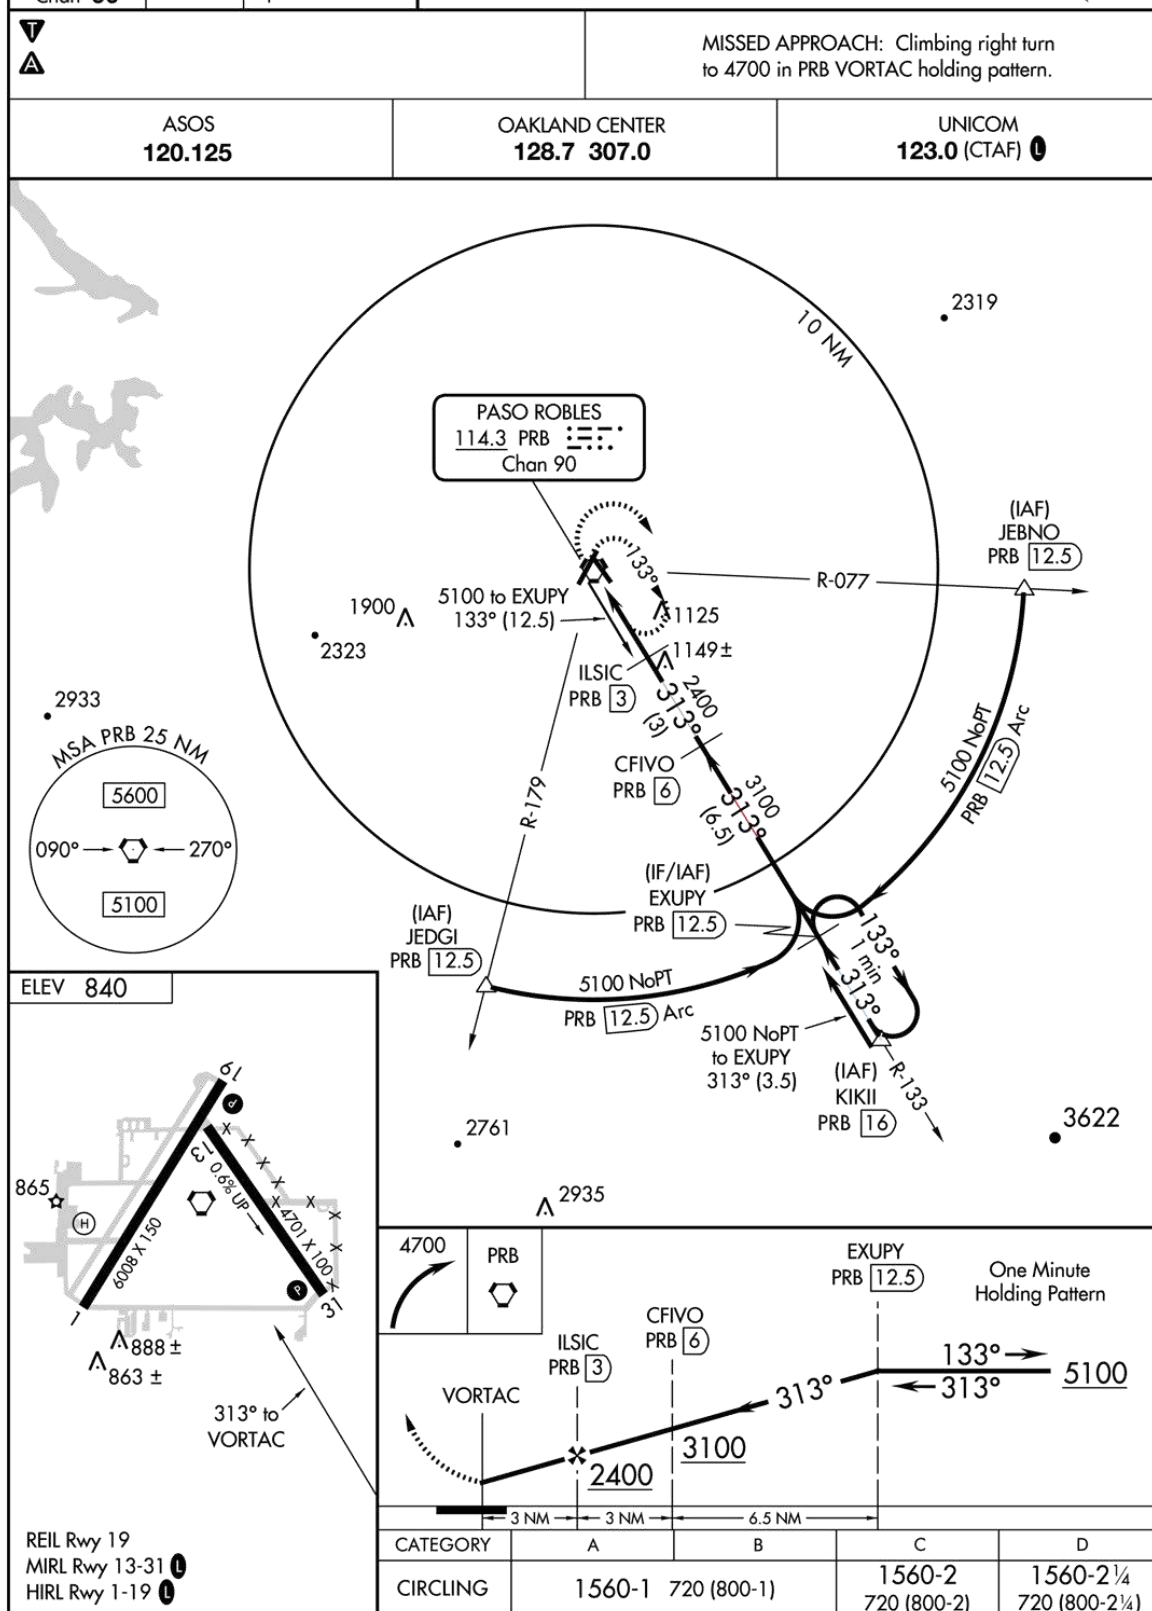

PASO ROBLES, CALIFORNIA
Amdt 3 23SEP10

35°40'N-120°38'W

PASO ROBLES MUNI (PRB)
VOR/DME-B
©ASA

Figure 192. VOR/DME-B (PRB).

231

©ASA

232

TEXAS

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE CLL.

COLLEGE STATION (L) VORTACW 113.3 CLL Chan 80 N30°36.30' W96°25.24' 100° 3.1 NM to fld. 264/8E.
HIWAS.

DME unusable:

101°–130° byd 25 NM blo 2,500'

131°–148° byd 30 NM blo 2,500'

149°–160° byd 30 NM blo 2,000'

325°–349° byd 30 NM blo 2,500'

350°–100° byd 25 NM blo 3,500'

VOR portion unusable:

131°–189° blo 7,000'

ROWDY NDB (LOM) 260 CL N30°29.62' W96°20.26' 341° 5.8 NM to fld. Unmonitored when ATCT clsd.

ILS/DME 111.7 I-CLL Chan 54 Rwy 34. Class IB. LOM ROWDY NDB. Unmonitored when ATCT clsd. DME unmonitored. Glideslope unusable for coupled apchs blo 1,050' MSL.

COLLIN CO RGNL AT MC KINNEY (See DALLAS on page 241)

COLLINSVILLE

SUDDEN STOP (T32) 1 NE UTC–6(–5DT) N33°34.29' W96°54.43'

DALLAS–FT WORTH

720 NOTAM FILE FTW

RWY 17–35: 1550X60 (TURF)

RWY 17: Trees.

RWY 35: Road.

AIRPORT REMARKS: Attended continuously. Student training prohibited.

COMMUNICATIONS: CTAF 122.9

COLORADO CITY (T88) 6 NW UTC–6(–5DT) N32°28.11' W100°55.27'

DALLAS–FT WORTH

2214 B NOTAM FILE FTW

H–6G, L–17A

RWY 17–35: H5479X60 (ASPH) S–50 LIRL

RWY 35: Tree.


AIRPORT REMARKS: Attended irregularly. Rwy 17–35 pavement from Rwy 35 thld lgts southward used as a twy and not maintained.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE BPG.

BIG SPRING (L) VORTACW 114.3 BGS Chan 90 N32°23.14'

W101°29.02' 069° 29.0 NM to fld. 2670/11E.

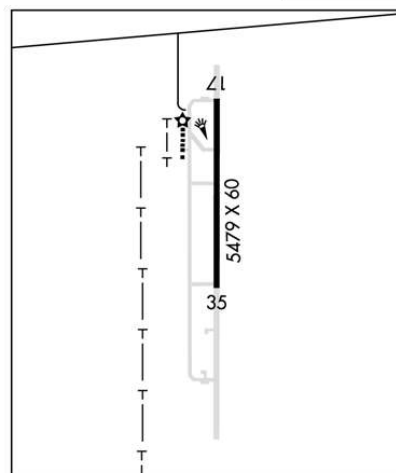

COLUMBUS

ROBERT R WELLS JR (66R) 3 S UTC–6(–5DT) N29°38.49' W96°30.96'

HOUSTON

242 B FUEL 100LL, JET A NOTAM FILE CXO

L–19D, 21A

RWY 15–33: H3800X60 (ASPH) S–12.5 MIRL

RWY 15: REIL. PAPI(P2L). Thld dsplcd 305'. Fence.

RWY 33: REIL. PAPI(P2L). Thld dsplcd 177'. Brush.

AIRPORT REMARKS: Unattended. Self svc fuel with major credit card. Ultra–light activity on and invof arpt. Rwy 33 REIL OTS indef. ACTIVATE MIRL Rwy 15–33—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE CXO.

INDUSTRY (L) VORTACW 110.2 IDU Chan 39 N29°57.36' W96°33.73' 165° 19.0 NM to fld. 419/8E.

Figure 194. Excerpts from Chart Supplement.

©ASA

288

TEXAS

WESTHEIMER AIR PARK (O07) 20 W UTC-6(-5DT) N29°41.68' W95°47.68' HOUSTON

117 B S2 FUEL 100LL NOTAM FILE CXO

RWY 11-29: H2500X28 (CONC) LIRL

RWY 11: Trees.

RWY 29: Tree.

AIRPORT REMARKS: Attended 1400-0000Z. 90' P-line 1500' from Rwy 11 thld. Grass in cracks on rwy sfc. ACTIVATE rotating bcn—CTAF. ACTIVATE LIRL Rwy 11-29—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

WILLIAM P HOBBY (HOU) 8 SE UTC-6(-5DT) N29°38.73' W95°16.73' HOUSTON

46 B S2 FUEL 100LL, JET A, A1 OX 1, 2, 3, 4 LRA Class I, ARFF Index C

NOTAM FILE HOU

COPTER

H-7C, L-19E, 21A, GOMW

IAP, AD

RWY 04-22: H7602X150 (CONC-GRVD) S-75, D-200, 2S-168,

2T-461, 2D-400, 2D/D1-444, C5-717 HIRL CL

RWY 04: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 57'.

RWY 22: MALS. VASI(V4L)—GA 3.0° TCH 52'. Pole.

RWY 12R-30L: H7602X150 (ASPH-GRVD) S-75, D-195, 2S-168,

2T-461, 2D-220, 2D/D1-444, C5-717 HIRL CL

RWY 12R: MALS. TDZL. PAPI(P4R)—GA 3.0° TCH 52'. Thld dsplcd 1034'. Pole.

RWY 30L: TDZL. REIL. PAPI(P4L)—GA 3.0° TCH 71'. Road.

RWY 17-35: H6000X150 (ASPH-CONC-GRVD) S-75, D-121, 2S-153,

2D-195 MIRL

RWY 17: VASI(V4L)—GA 3.0° TCH 38'. Antenna.

RWY 35: REIL. VASI(V4R)—GA 3.0° TCH 41'. Bldg.

RWY 12L-30R: H5148X100 (CONC-GRVD) S-30, D-45, 2D-80 MIRL

RWY 12L: PAPI(P4L)—GA 3.0° TCH 60'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04: TORA-7602 TODA-7602 ASDA-7602 LDA-7602

RWY 12L: TORA-5148 TODA-5148 ASDA-5148 LDA-5148

RWY 12R: TORA-7602 TODA-7602 ASDA-7602 LDA-6568

RWY 17: TORA-6000 TODA-6000 ASDA-6000 LDA-6000

RWY 22: TORA-7602 TODA-7602 ASDA-7602 LDA-7602

RWY 30L: TORA-7602 TODA-7602 ASDA-7602 LDA-7602

RWY 30R: TORA-5148 TODA-5148 ASDA-5148 LDA-5148

RWY 35: TORA-6000 TODA-6000 ASDA-6000 LDA-6000

AIRPORT REMARKS: Attended continuously. Arpt CLOSED to acft with wingspan over 125' except 24 hours PPR, call arpt manager 713-640-3000. Numerous birds on and in/ov arpt. ASDE-X Surveillance System in use: pilots should operate transponders with Mode C on all twys and rwys. Customs ramp has multiple obstructions, recommend large acft use customs overflow ramp. Acft in tkf position on Rwy 22 be alert for possible radio interference or null on frequency 118.7. Use upper antenna if so equipped. Rwy 04 runway visual range touchdown, midfield, rollout avbl. Rwy 22 runway visual range touchdown, midfield, rollout avbl. Rwy 12R runway visual range touchdown avbl. Rwy 30L runway visual range touchdown avbl. Twy G centerline to edge of adjacent svc vehicle road on W side only 48'. Due to complex rwy configuration, when taxiing to thlds 12L and 12R and 17 check compass heading before departing. Acft southbound on Twy C to Rwy 30L thld use extreme care, Twy C makes a 45° dogleg to the left crossing Twy K. PAPI Rwy 30L unusable byd 8° left and right of course. Flight Notification Service (ADCUS) available. NOTE: See Special Notices—U.S. Special Customs Requirement.

WEATHER DATA SOURCES: ASOS (713) 847-1462 TDWR.

COMMUNICATIONS: D-ATIS 124.6 (713) 847-1491 UNICOM 122.95

HOBBY RCO 122.35 (MONTGOMERY COUNTY RADIO)

Ⓡ HOUSTON APP CON 134.45 (South) 124.35 (West) 120.05 (East)

HOBBY TOWER 118.7

HOUSTON GND CON 121.9 CLNC DEL 125.45 PRE-TAXI CLNC 125.45

Ⓡ HOUSTON DEP CON 134.45 (South) 123.8 (West) 119.7 (North)

AIRSPACE: CLASS B See VFR Terminal Area Chart

VOR TEST FACILITY (VOT) 108.4

RADIO AIDS TO NAVIGATION: NOTAM FILE HOU.


HOBBY (H) VORW/DME 117.1 HUB Chan 118 N29°39.34' W95°16.60' at fld. 47/5E.

ILS/DME 109.9 I-HUB Chan 36 Rwy 04. Class IIIE. DME also serves Rwy 22.

ILS/DME 111.3 I-PRQ Chan 50 Rwy 12R. Class IE. DME also serves Rwy 30L.

LOC/DME 109.9 I-OIB Chan 36 Rwy 22. DME also serves Rwy 04. DME unusable byd 17° right of course.

ILS/DME 111.3 I-UPU Chan 50 Rwy 30L. Class IE. DME also serves Rwy 12R.

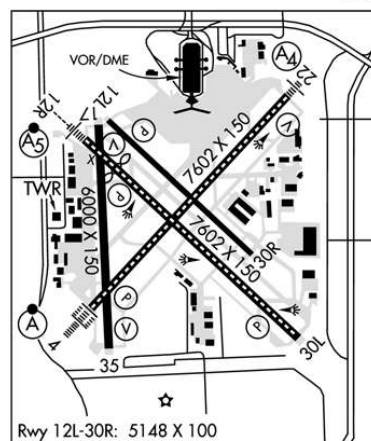

HOUSTON MCJ N29°42.83' W95°23.80'
AWOS-3 119.575

HOUSTON
H-7C, L-19E, 21A, GOMW

FIGURE 195.—Excerpt from Chart Supplement.

HOUSTON, TEXAS

AL-198 (FAA)


13010

LOC/DME I-HUB 109.9 Chan 36	APP CRS 041°	Rwy Idg 7602 TDZE 44 Apt Elev 46
---	------------------------	---

ILS or LOC RWY 4

HOUSTON/ WILLIAM P. HOBBY (HOU)

When ALSF-1 inop, increase visibility Cat E ILS ¼ mile, LOC ½ mile.		ALSF-2	MISSED APPROACH: Climb to 2000 via HUB R-040 to RAYCI INT/HUB 1.5 DME and hold.		
ATIS 124.6	HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST	HOBBY TOWER 118.7 256.9		GND CON 121.9	CLNC DEL 125.45

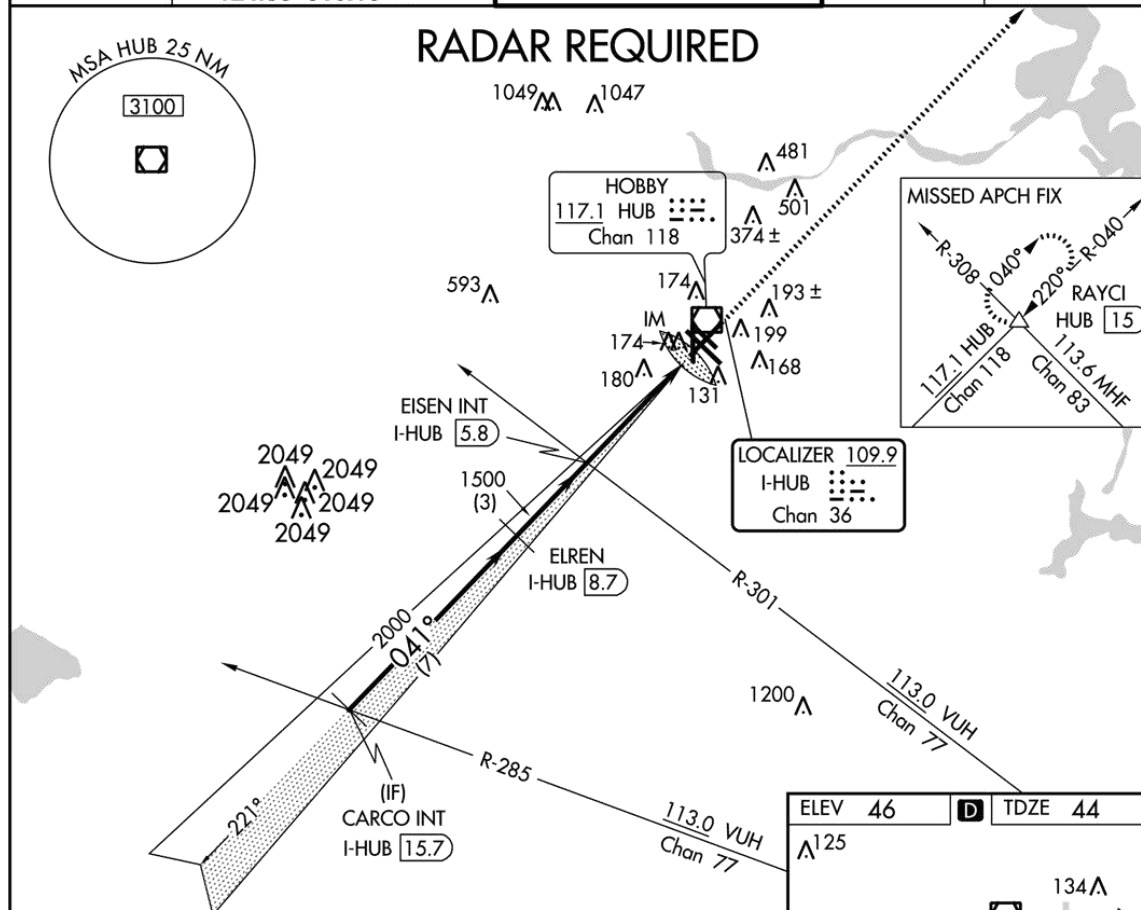


CARCO INT I-HUB 15.7		ELREN I-HUB 8.7		EISEN INT I-HUB 5.8		2000 HUB R-040	
GS 3.00° TCH 57		4000		2000		1500	
7 NM		3 NM		3.2 NM		1.1	
0.1		IM		I-HUB 2.6		I-HUB 1.4	
CATEGORY	A	B	C	D	E	244/24	
S-ILS 4	244/18		200 (200-½)		200 (200-½)		
S-LOC 4	480/24	436 (500-½)	480/40	436 (500-¾)	480/50	436 (500-1)	
CIRCLING	500-1	454 (500-1)	520-1½	600-2	860-3	814 (900-3)	
		474 (500-1½)		554 (600-2)		814 (900-3)	

AL-5457 (FAA)

HOUSTON/ DAVID WAYNE HOOKS MEMORIAL (DWH)

MISSED APPROACH: Climb to 2000 direct OILER and hold.

RADAR REQUIRED

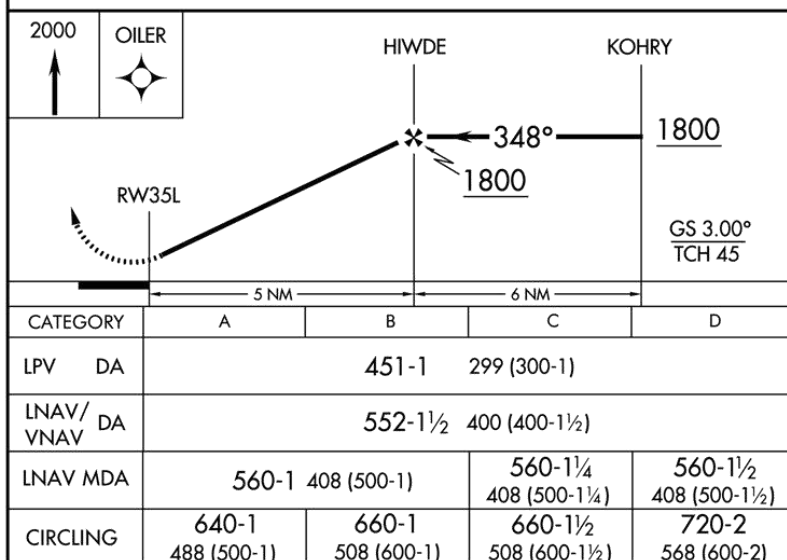

HOUSTON/DAVID WAYNE HOOKS MEMORIAL (DWH)

30°04'N-95°33'W

©ASA

Figure 197. RNAV (GPS) RWY 35L (DWH).

84

LOUISIANA

LAFAYETTE RGNL (LFT) 2 SE UTC-6(-5DT) N30°12.30' W91°59.27'

42 B S4 FUEL 100LL, JET A OX 1, 4 Class I, ARFF Index B NOTAM FILE LFT

RWY 04R-22L: H8001X150 (ASPH-GRVD) S-140, D-170, 2S-175, 2D-290 HIRL

RWY 04R: REIL. PAPI(P4L)—GA 3.0° TCH 53'. Pole. Rgt tfc.

RWY 22L: MALSR. PAPI(P4L)—GA 3.0° TCH 52'. Thld displcd 342'. Trees.

RWY 11-29: H5401X148 (ASPH-GRVD) S-85, D-110, 2S-140, 2D-175 MIRL

RWY 11: REIL. PAPI(P4L)—GA 3.0° TCH 35'. Trees. Rgt tfc.

RWY 29: REIL. PAPI(P4L)—GA 3.0° TCH 35'. Tree.

RWY 04L-22R: H4099X75 (ASPH) S-25, D-32 MIRL

RWY 04L: REIL. PAPI(P2L)—GA 3.0° TCH 26'. Tree.

RWY 22R: REIL. PAPI(P2L)—GA 3.0° TCH 27'. Tree. Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04L:TORA-4099 TODA-4099 ASDA-4099 LDA-4099

RWY 04R:TORA-8001 TODA-8001 ASDA-8001 LDA-8001

RWY 11:TORA-5401 TODA-5401 ASDA-5401 LDA-5401

RWY 22L:TORA-8001 TODA-8001 ASDA-8001 LDA-7659

RWY 22R:TORA-4099 TODA-4099 ASDA-4099 LDA-4099

RWY 29:TORA-5401 TODA-5401 ASDA-5401 LDA-5401

ARRESTING GEAR/SYSTEM

RWY 04R: EMAS

RWY 22L: EMAS

AIRPORT REMARKS: Attended continuously. Numerous birds on and in/ovf arpt. PPR for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 337-266-4400. Rwy 04L-22R not avbl for air carrier ops with more than 30 passenger seats. Ctc ground control prior to push back from terminal. 155' oil rig 1 NM southeast of arpt. Rwy 22L runway visual range touchdown avbl. Twy B between Twy C and Twy D clsd to acft with wingspan over 80'. Twy F south of Twy B clsd to single wheel acft over 25,000 lbs and dual wheel acft over 32,000 lbs. Twy F south of Twy B reduces to 40' wide. When twr clsd ACTIVATE MALSR Rwy 22L—CTAF, MIRL Rwy 04L-22R not avbl.

WEATHER DATA SOURCES: ASOS (337) 237-8153 HIWAS 109.8 LFT.

COMMUNICATIONS: CTAF 118.5 ATIS 134.05 UNICOM 122.95

RCO 122.35 (DE RIDDER RADIO)

Ⓡ APP/DEP CON 121.1 (020°-210°) 128.7 (211°-019°) (1130-0430Z‡)

Ⓡ HOUSTON CENTER APP/DEP CON 126.35 (0430-1130Z‡)

TOWER 118.5 (1130-0430Z‡) GND CON 121.8 CLNC DEL 125.55

AIRSPACE: CLASS C svc ctc APP CON svc 1130-0430Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE LFT.

(L) VORTACW 109.8 LFT Chan 35 N30°11.63' W91°59.55' at fld. 36/3E. HIWAS.

LAFFS NDB (LOM) 375 LF N30°17.36' W91°54.48' 216° 6.5 NM to fld. Unmonitored when ATCT clsd.

ILS/DME 110.9 I-TYN Chan 46 Rwy 04R. Class IE.

ILS/DME 109.5 I-LFT Chan 32 Rwy 22L. Class IE. LOM LAFFS NDB. ILS and LOM unmonitored when ATCT clsd.

ASR (1130-0430Z‡)

• • • • •

HELIPAD H1: H50X50 (ASPH)

HELIPAD H1: RLLS.

HELIPORT REMARKS: Rwy H1 circular pad. Helipad H1 perimeter lgts. Heliport ops to/from helipad between Twys B and F and the terminal ramp, avoid overflight of the terminal and other buildings in the 270°-020° quadrant from the helipad. Lead-in lgts two ingress paths. Helicopter parking pads avbl.



LAFFS N30°17.36' W91°54.48' NOTAM FILE LFT.

NDB (LOM) 375 LF 216° 6.5 NM to Lafayette Rgnl. Unmonitored when ATCT clsd.

HOUSTON

L-21B, 22E

Figure 198. Excerpt from Chart Supplement.

©ASA

HOUMA, LOUISIANA

AL-5037 (FAA)

VORTAC TBD 112.0 Chan 57	APP CRS 121°	Rwy Idg 4999 TDZE 9 Apt Elev 10
---------------------------------------	------------------------	--



COPTER VOR/DME RWY 12

HOUMA-TERREBONNE (HUM)

A When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase MDA 80 feet.

MISSED APPROACH: Climb to 1800 via TBD VORTAC R-122 to BOURG INT/16.3 DME and hold.

ATIS 120.25	NEW ORLEANS APP CON 118.9 256.9	HOUMA TOWER* 125.3 (CTAF) 0346.3	GND CON 121.8	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

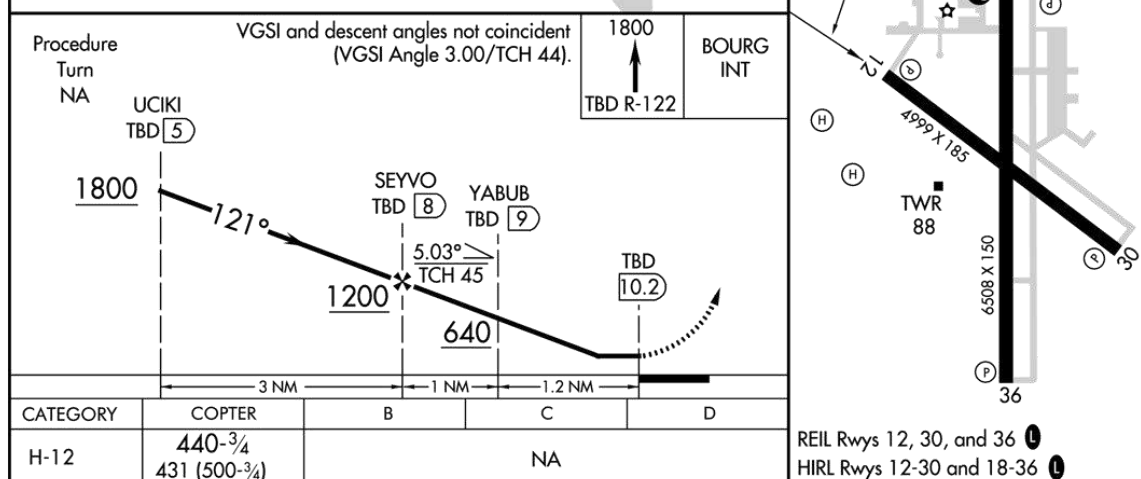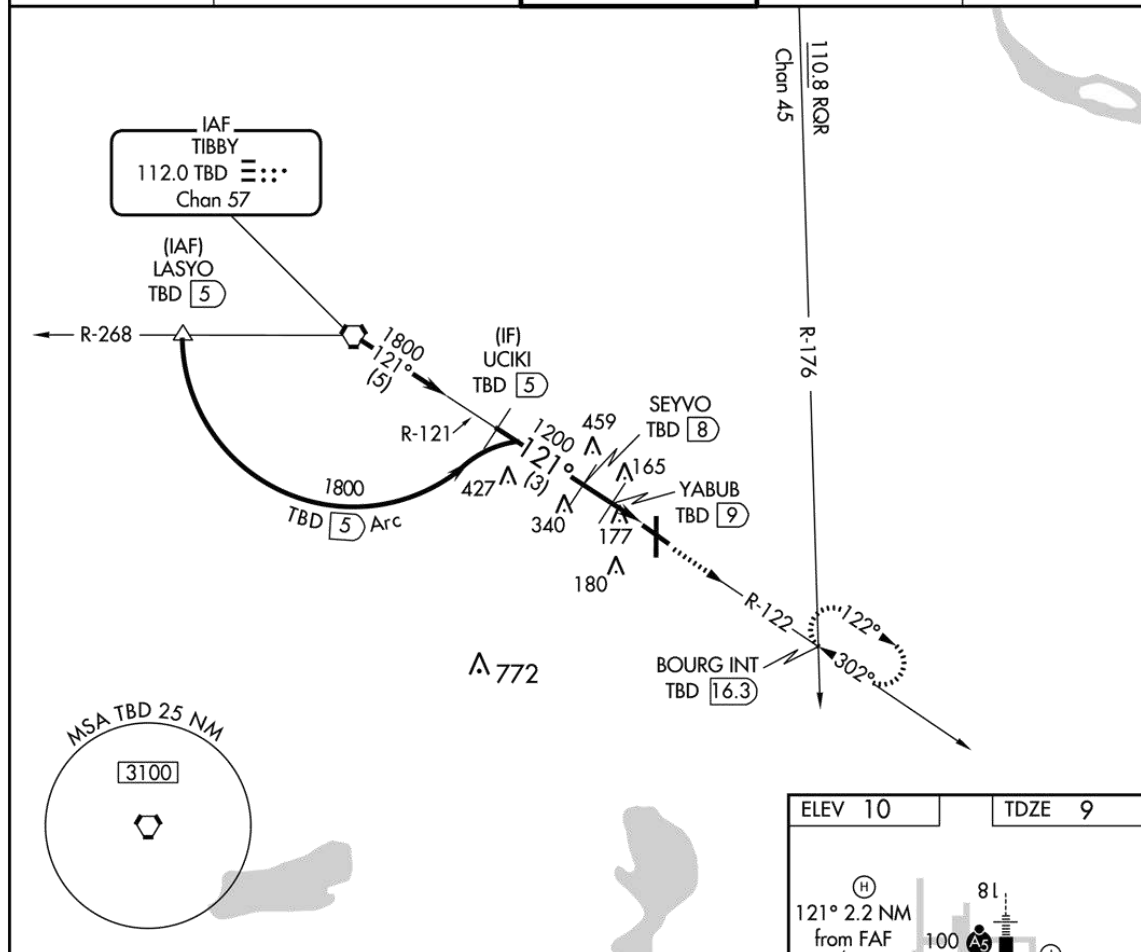

HOUMA, LOUISIANA

Amdt 4 12264

29°34'N-90°40'W

HOUMA-TERREBONNE (HUM)

COPTER VOR/DME RWY 12

Figure 199. COPTER VOR/DME RWY 12 (HUM).

©ASA

HOUMA, LOUISIANA

AL-5037 (FAA)

12292

VORTAC TBD 112.0 Chan 57	APP CRS 121°	Rwy Idg 4999 TDZE 9 Apt Elev 10
--	------------------------	--

VOR RWY 12



HOUMA-TERREBONNE (HUM)

⚠ When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase all MDA 80 feet, increase S-12 Cat B/C/D and Circling Cat B/C/D visibility ¼ mile. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 1800 via TBD R-122 to BOURG INT/TBD 16.3 DME and hold.

ATIS 120.25	NEW ORLEANS APP CON 118.9 256.9	HOUMA TOWER* 125.3 (CTAF) 346.3	GND CON 121.8	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

NoPT for arrivals on TBD VORTAC
airway radials 268 CW 296.

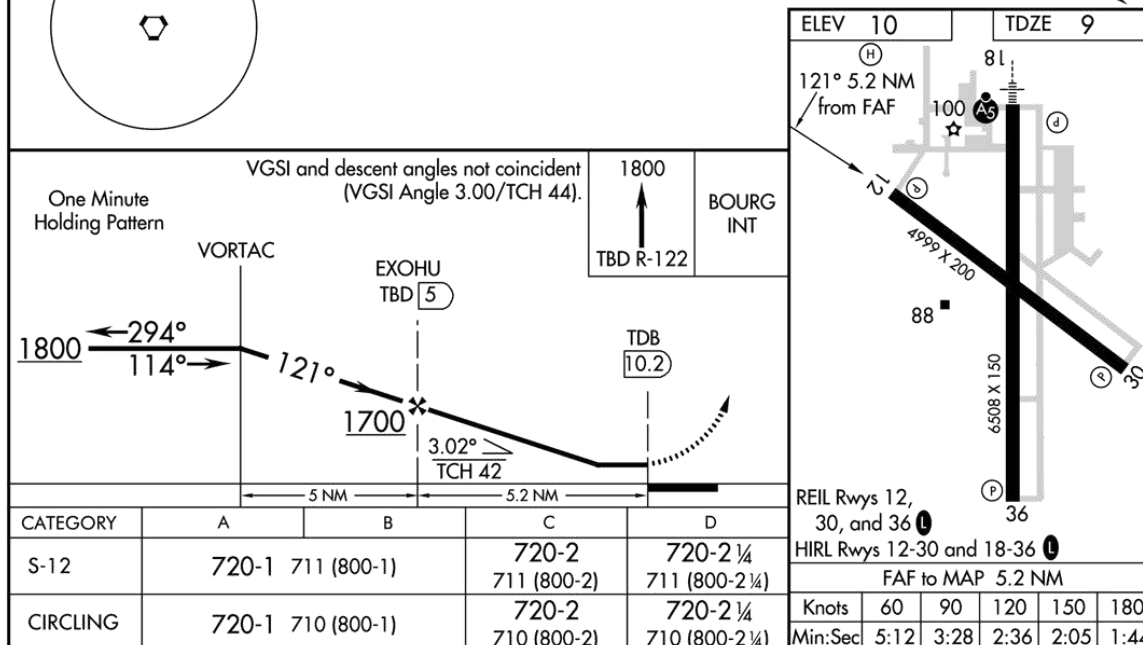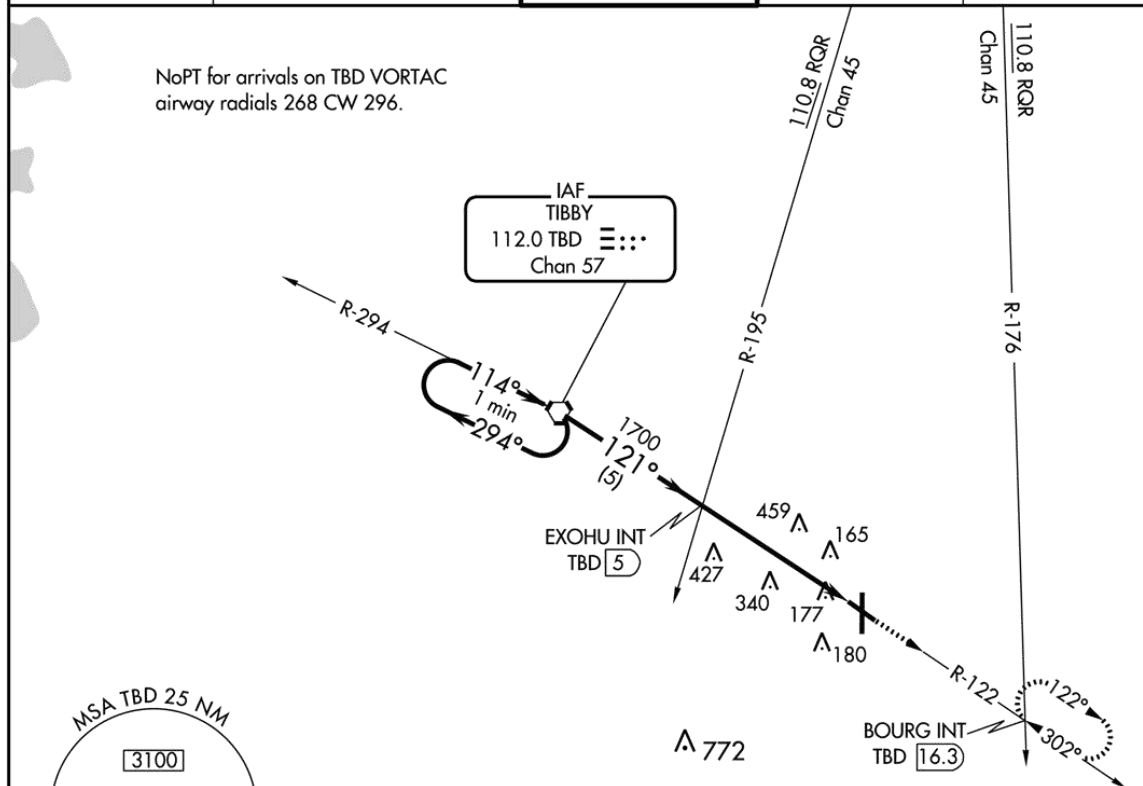

HOUMA, LOUISIANA
Amdt 5D 18OCT12

29°34'N-90°40'W

HOUMA-TERREBONNE (HUM)
VOR RWY 12
©ASA

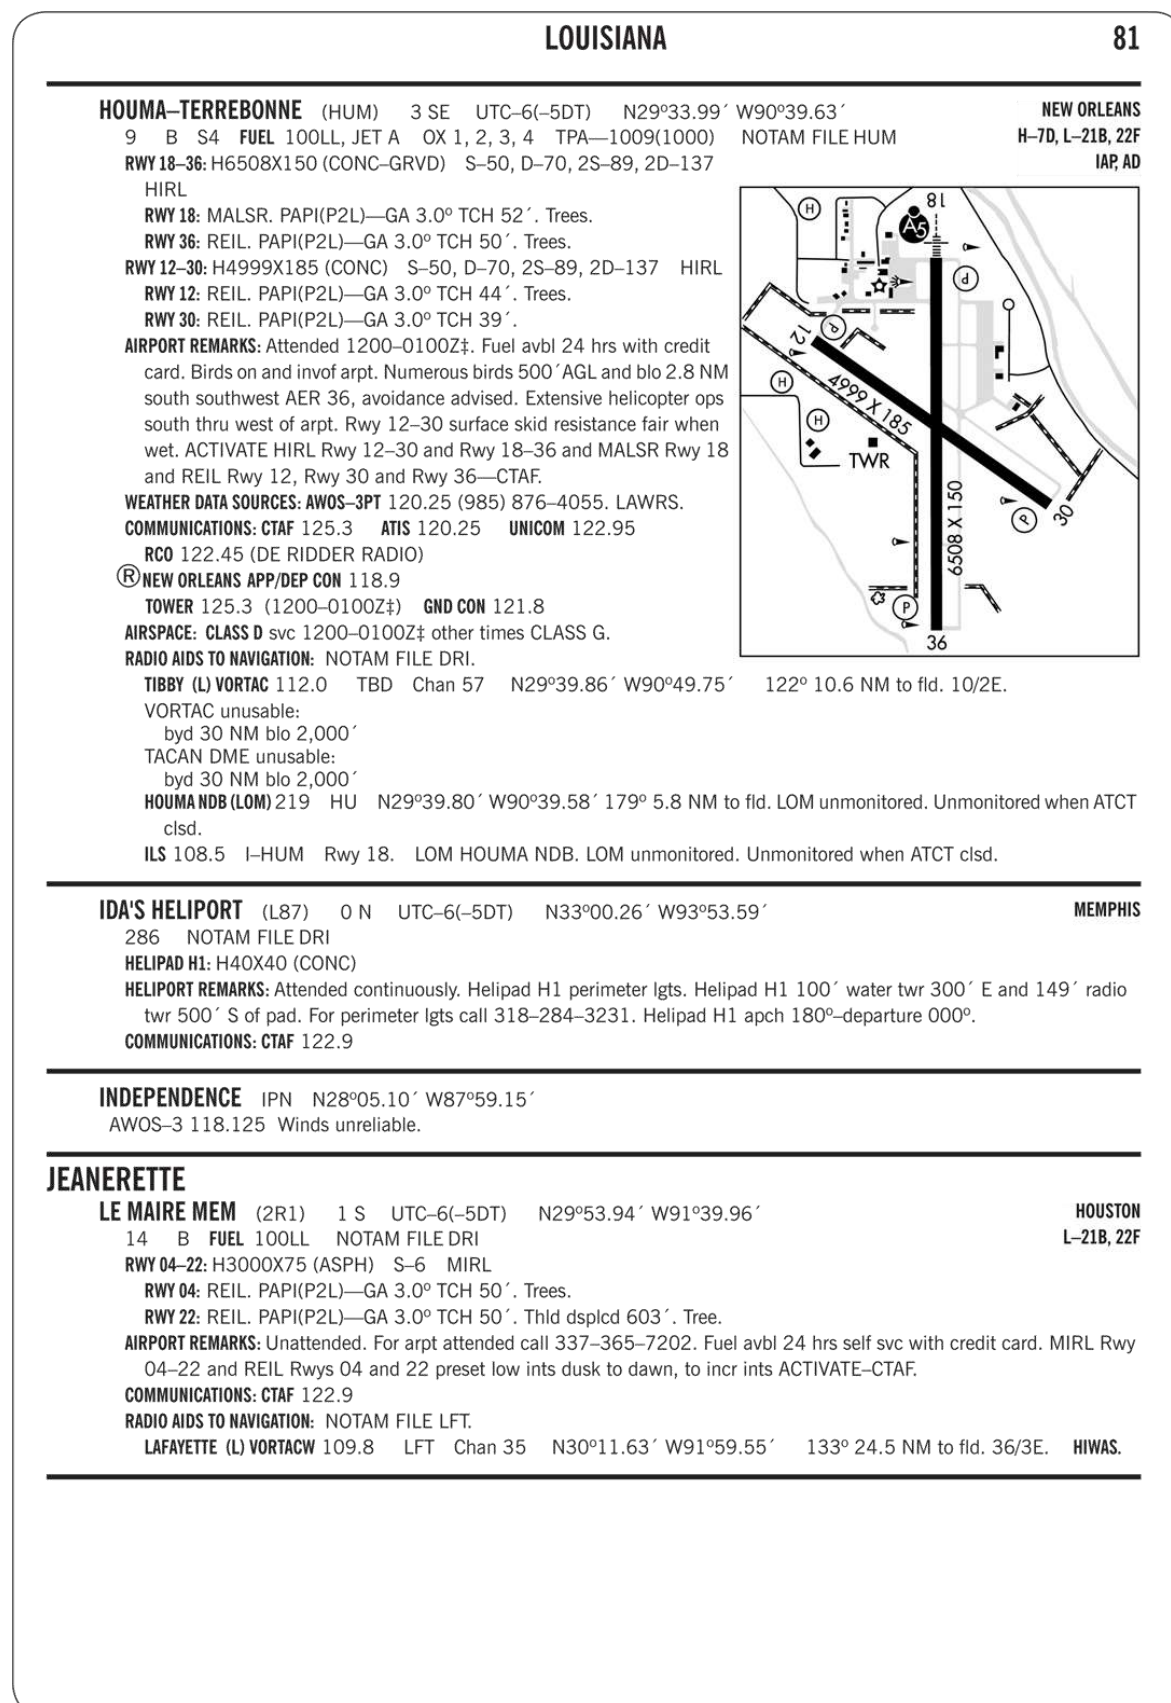


Figure 201. Excerpt from Chart Supplement.


©ASA

10266

AIRPORT DIAGRAM

AL-5040 (FAA)

NEW IBERIA/ACADIANA RGNL (ARA)
NEW IBERIA, LOUISIANA

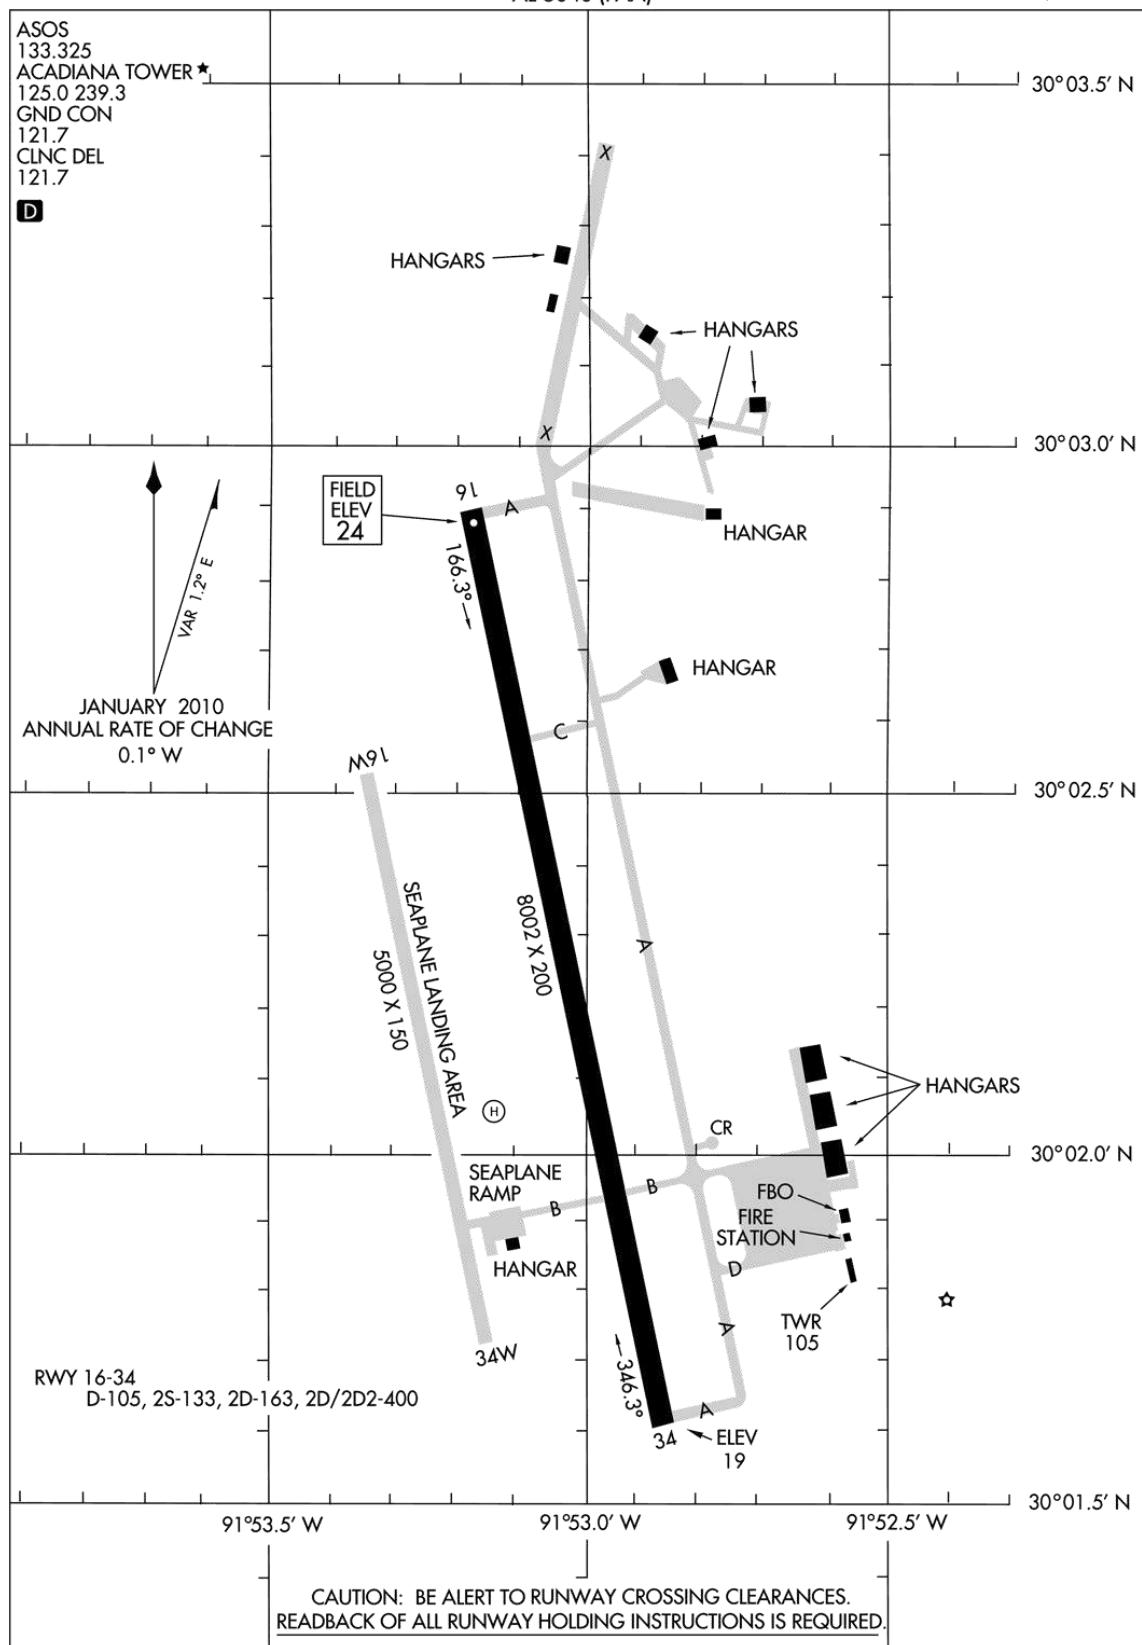

AIRPORT DIAGRAM

10266

NEW IBERIA, LOUISIANA
NEW IBERIA/ACADIANA RGNL (ARA)

Figure 202. Airport Diagram: New Iberia/AcadianaRGNL (ARA).

©ASA

90

LOUISIANA

NATCHITOCHES RGNL (IER) 2 S UTC-6(-5DT) N31°44.14' W93°05.95'

121 B S4 FUEL 100LL, JET A1+ NOTAM FILE IER

RWY 17-35: H5003X150 (ASPH) S-30 MIRL

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Tree.

RWY 35: ODALS. PAPI(P4L)—GA 3.0° TCH 43'. Trees.

RWY 07-25: H4000X100 (ASPH) S-21 MIRL

RWY 07: Trees.

RWY 25: P-line.

AIRPORT REMARKS: Attended dawn-dusk. For arpt attendant after hrs call 318-471-2106. Fuel avbl 24 hr with credit card. MIRL Rwy 17-35 and REIL Rwy 17 preset low ints dusk to dawn, to increase ints and ACTIVATE MIRL Rwy 07-25—CTAF. Rwy 35 ODALS operate low ints continuously, to increase ints ACTIVATE—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.025 (318) 352-1575.

COMMUNICATIONS: CTAF/UNICOM 122.8

® POLK APP/DEP CON 125.4

GCO 135.075 (FORT POLK APCH AND DE RIDDER FSS)

RADIO AIDS TO NAVIGATION: NOTAM FILE AEX.

ALEXANDRIA (H) VORTACW 116.1 AEX Chan 108 N31°15.40'

W92°30.06' 310° 42.0 NM to fld. 80/3E. HIWAS.

VOR unusable:

035°-065° blo 2,000'

066°-094° byd 35 NM blo 3,000'

185°-200° byd 35 NM blo 3,000'

201°-214° byd 35 NM blo 2,000'

215°-260° blo 2,000'

261°-285° byd 35 NM blo 2,000'

357°-034° byd 35 NM blo 3,000'


NDB (MHW) 407 OOC N31°39.45' W93°04.66' 343° 4.8 NM to fld. NOTAM FILE IER.

LOC 110.5 I-IER Rwy 35. LOC unmonitored 0000-1200Z±.

HOUSTON

H-61, L-22E

IAP

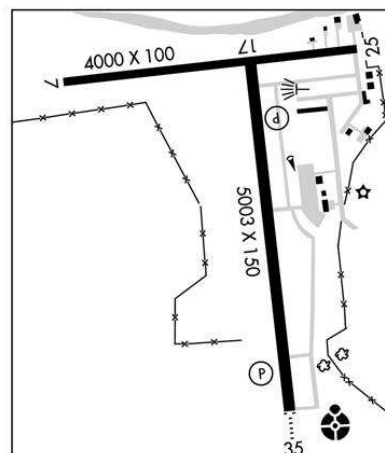

NEW IBERIA

ACADIANA RGNL (ARA) 4 NW UTC-6(-5DT) N30°02.27' W91°53.03'

24 B S2 FUEL 100LL, JET A OX 4 TPA-1024(1000) Class IV, ARFF Index A

NOTAM FILE ARA

RWY 16-34: H8002X200 (CONC) D-105, 2S-133, 2D-163,

2D/2D2-400 HIRL

RWY 16: ODALS. PAPI(P4L)—GA 3.0° TCH 51'.

RWY 34: MALSR. PAPI(P4L)—GA 3.0° TCH 52'. Rgt ttc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 16: TORA-8002 TODA-8002 ASDA-8002 LDA-8002

RWY 34: TORA-8002 TODA-8002 ASDA-8002 LDA-8002

AIRPORT REMARKS: Attended 1300-0300Z±. For fuel after hrs call 337-367-1401, FAX 337-367-1404. Seaplane landing area (water channel) West of and adjacent/parallel to runway. Rwy 16W-34W seaway edge lgts green; thld lgts amber. Bird activity on and invof arpt. ARFF PPR for more than 30 passenger seats call arpt manager 337-365-7202. Rotor wing movement and landing area between the rwy and seaway. Intensive helicopter training. When twr closed HIRL Rwy 16-34 preset low ints, to increase ints and ACTIVATE MALSR Rwy 34—CTAF.

WEATHER DATA SOURCES: ASOS 133.325 (337) 365-0128.

COMMUNICATIONS: CTAF 125.0 UNICOM 122.95

® LAFAYETTE APP/DEP CON 121.1 (1130-0430Z±)

HOUSTON CENTER APP/DEP CON 126.35 (0430-1130Z±)

TOWER 125.0 (1200-0300Z±) GND CON 121.7 CLNC DEL 121.7


LAFAYETTE CLNC DEL 118.05

AIRSPACE: CLASS D svc 1200-0300Z± other times CLASS G.

HOUSTON

H-7D, L-21B, 22E, GOMC

IAP, AD

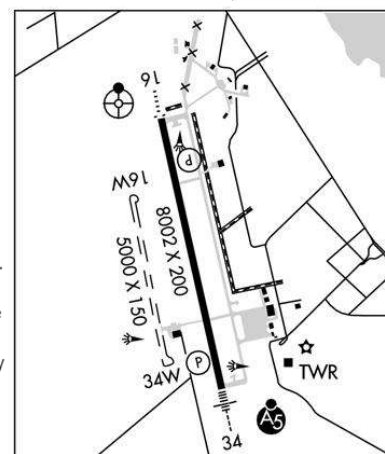

CONTINUED ON NEXT PAGE

Figure 203. Excerpt from Chart Supplement.

©ASA

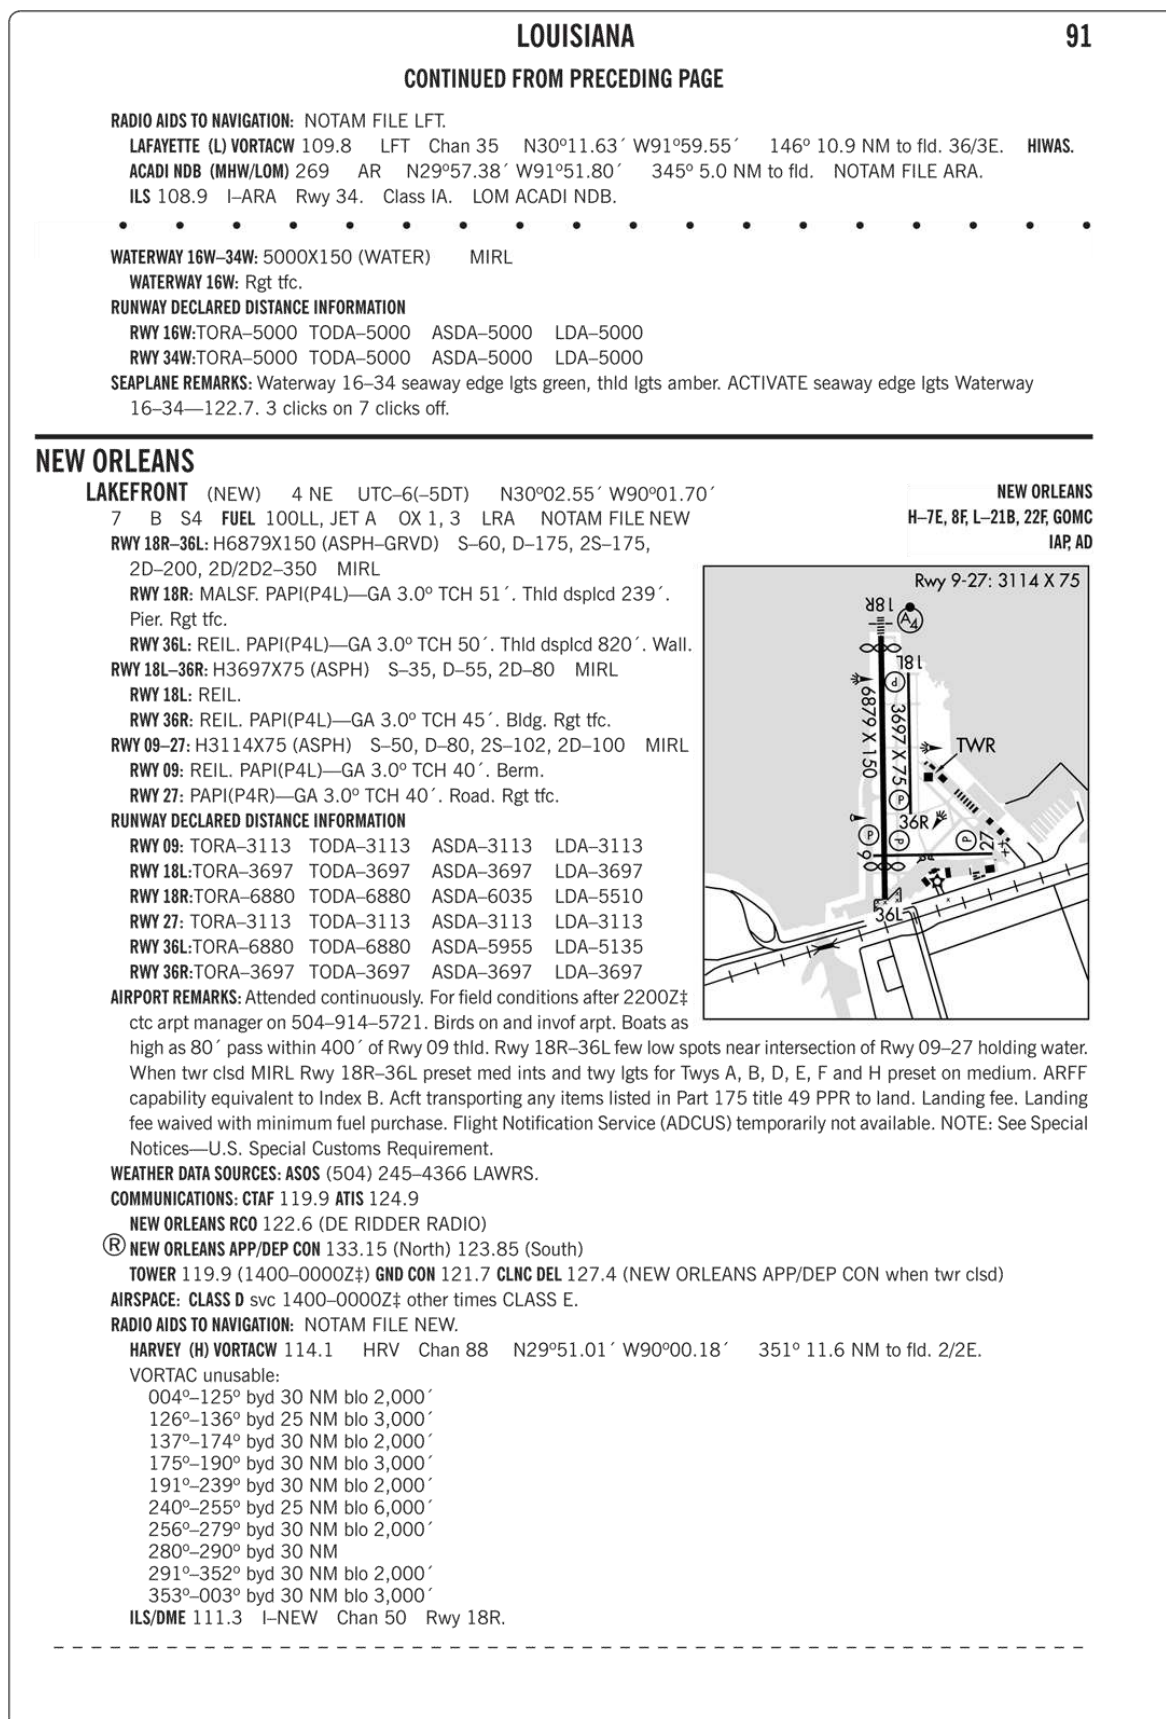


Figure 203A. Excerpt from Chart Supplement.

©ASA



AIRPORT DIAGRAM

HONOLULU INTL (HNL) (PHNL)
HONOLULU, HAWAII



HONOLULU INTL (HNL) (PHNL)

©ASA

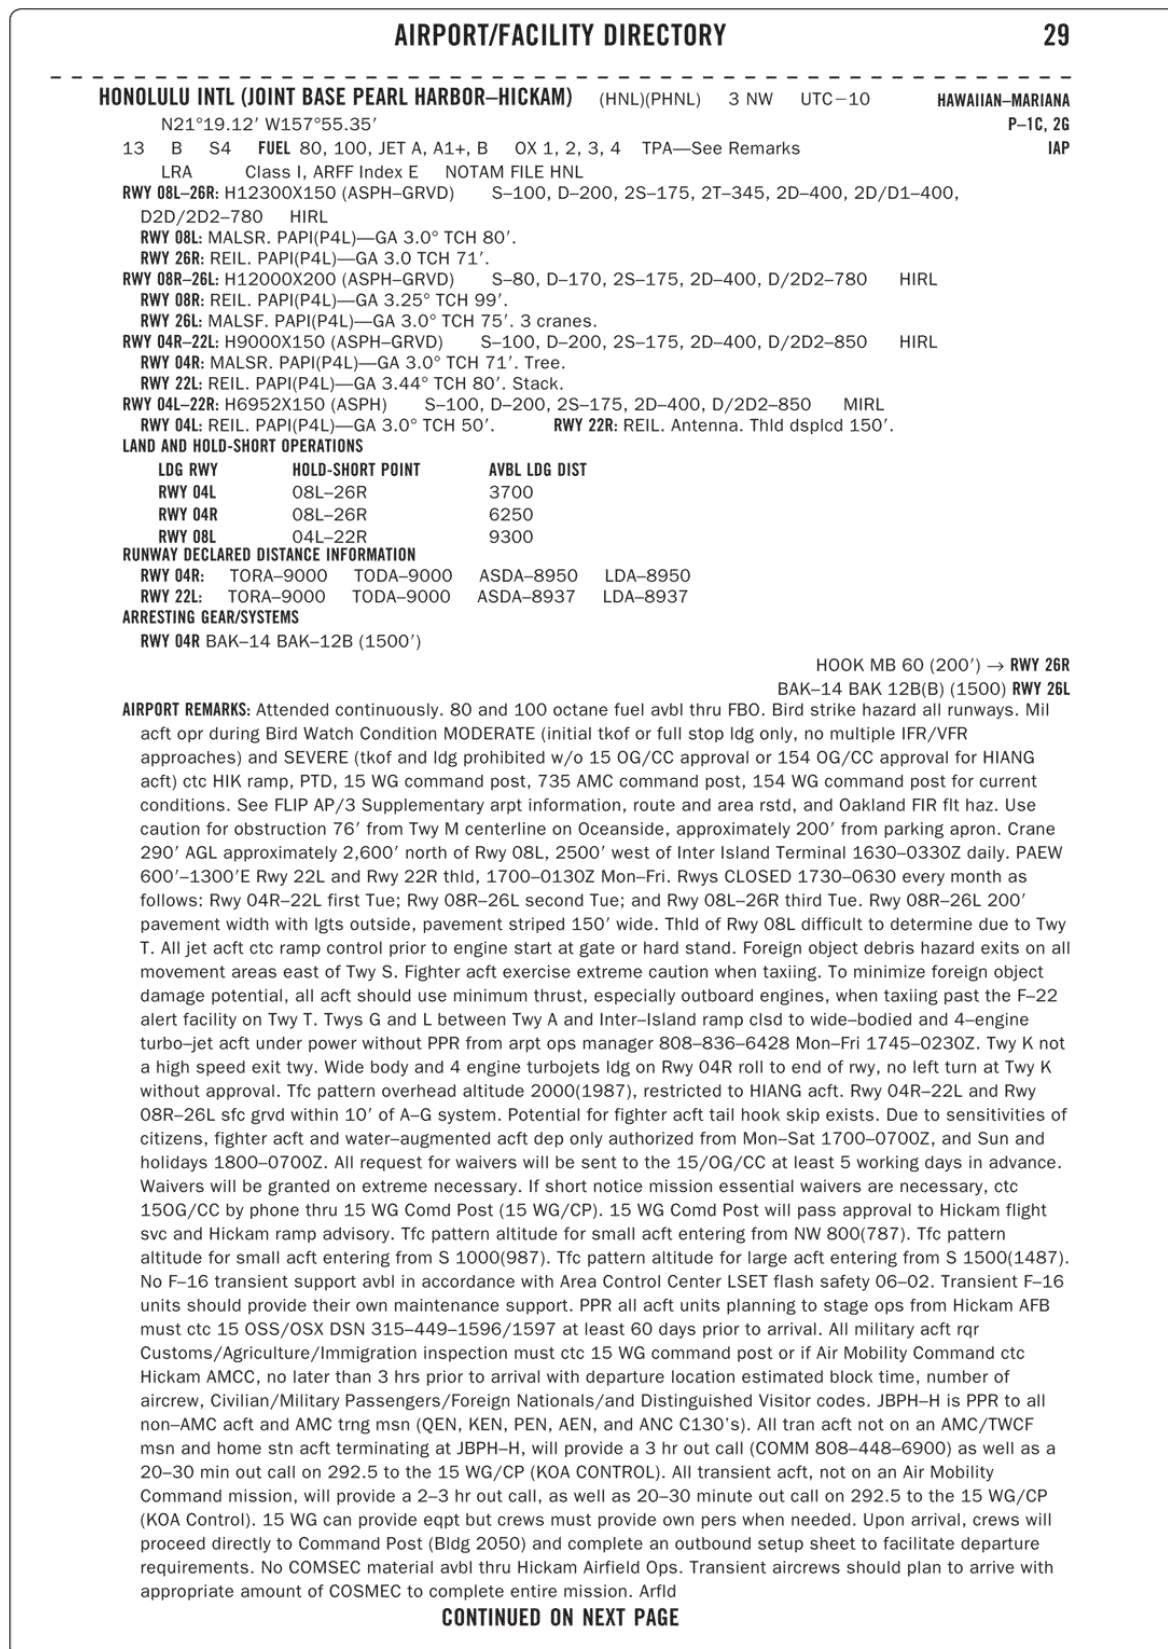


Figure 206. Excerpt from Chart Supplement.


©ASA

(STELA.STELA1) 16259

ST-460 (FAA)

STELA ONE ARRIVAL

WINDSOR LOCKS, CONNECTICUT

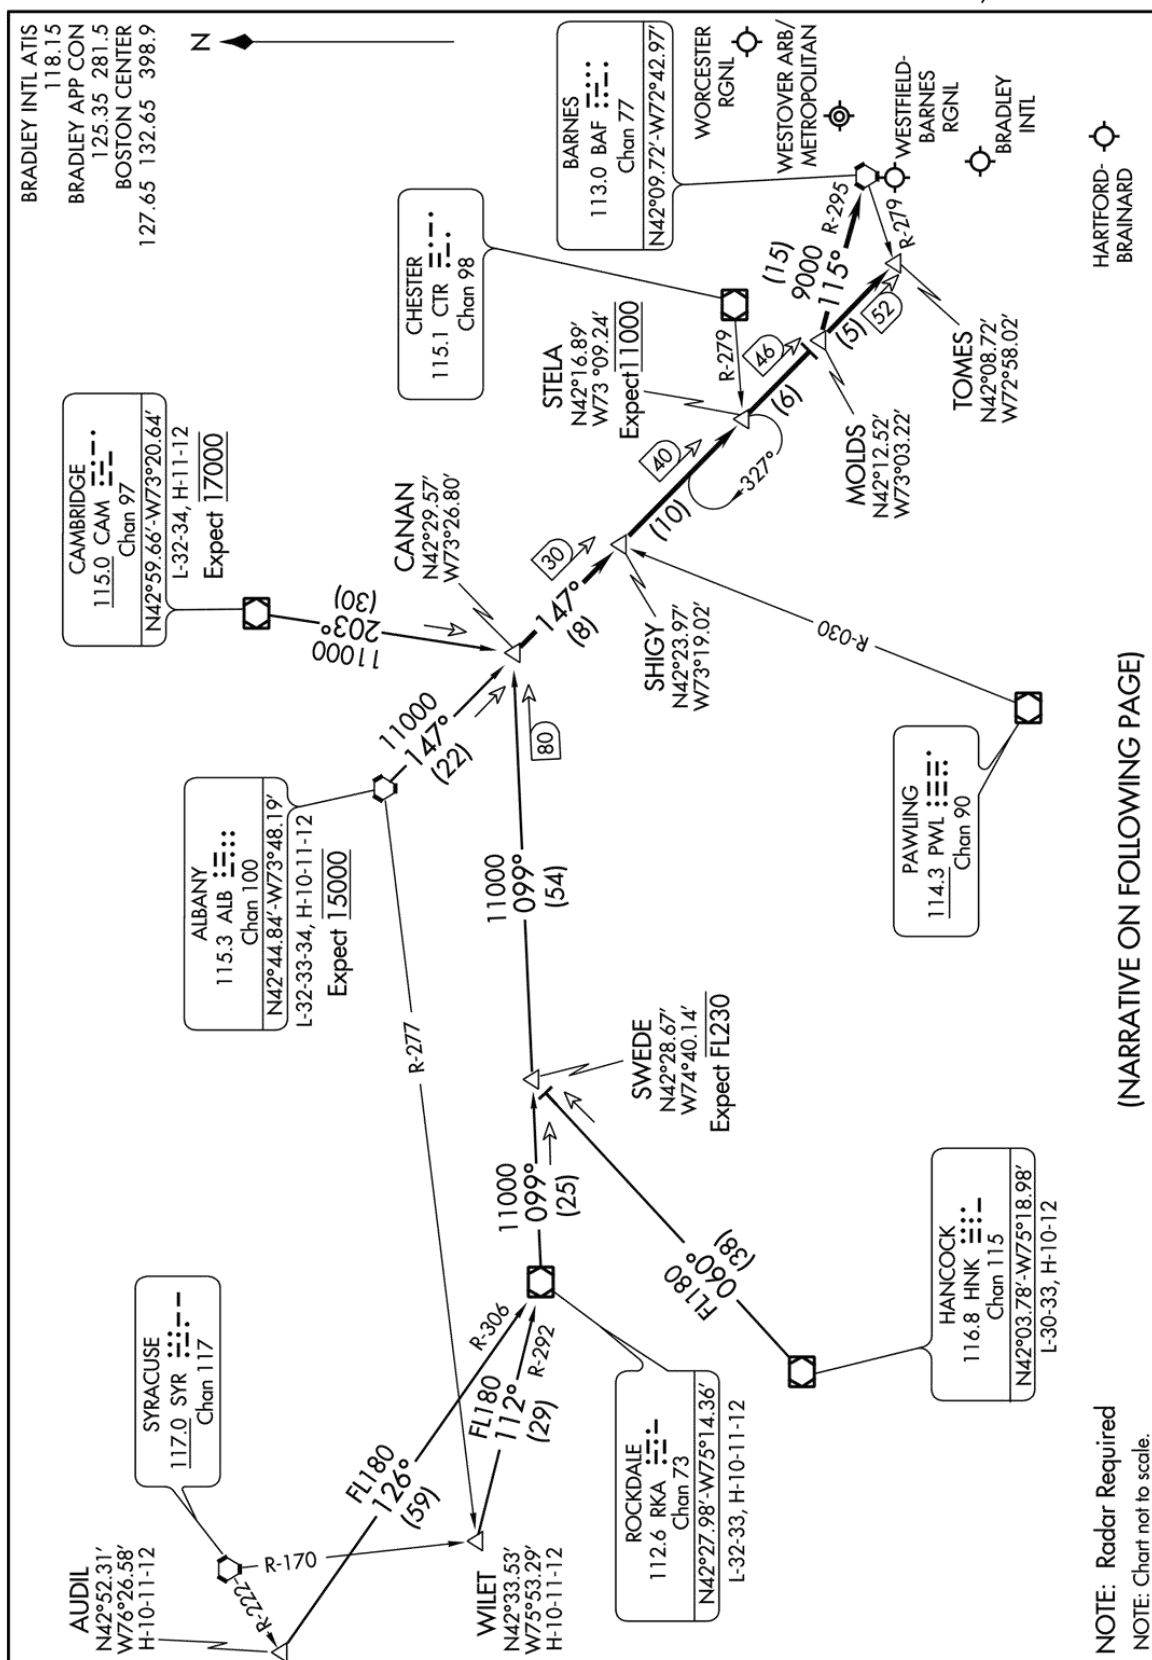

STELA ONE ARRIVAL

(STELA.STELA1) 31MAY12

Figure 208. STELA ONE ARRIVAL (STELA.STELA1).

©ASA

(STELA.STELA1) 16259

ST-460 (FAA)

STELA ONE ARRIVAL

WINDSOR LOCKS, CONNECTICUT

ARRIVAL ROUTE DESCRIPTION

ALBANY TRANSITION (ALB.STELA1): From over ALB VORTAC via ALB R-147 to CANAN INT. Thence. . . .

AUDIL TRANSITION (AUDIL.STELA1): From over AUDIL INT via RKA R-306 to RKA VOR/DME, then via RKA R-099 to CANAN INT. Thence. . . .

CAMBRIDGE TRANSITION (CAM.STELA1): From over CAM VOR/DME via CAM R-203 to CANAN INT. Thence. . . .

HANCOCK TRANSITION (HNK.STELA1): From over HNK VOR/DME via HNK R-060 to SWEDE INT, then via RKA R-099 to CANAN INT. Thence. . . .

WILET TRANSITION (WILET.STELA1): From over WILET INT via RKA R-292 to RKA VOR/DME, then via RKA R-099 TO CANAN INT. Thence. . . .

KBDL and KHFD ARRIVALS: From over CANAN INT via ALB R-147 to TOMES INT. Expect radar vectors to final approach course prior to TOMES INT.

KBAF, KCEF and KORH ARRIVALS: From over CANAN INT via ALB R-147 to MOLDS INT. Then via BAF R-295 to BAF VORTAC. Expect radar vectors to final approach course prior to BAF VORTAC.

STELA ONE ARRIVAL

(STELA.STELA1) 31MAY12

WINDSOR LOCKS, CONNECTICUT

Figure 209. STELA ONE ARRIVAL (STELA.STELA1).

©ASA

WINDSOR LOCKS, CONNECTICUT

AL-460 (FAA)

16203


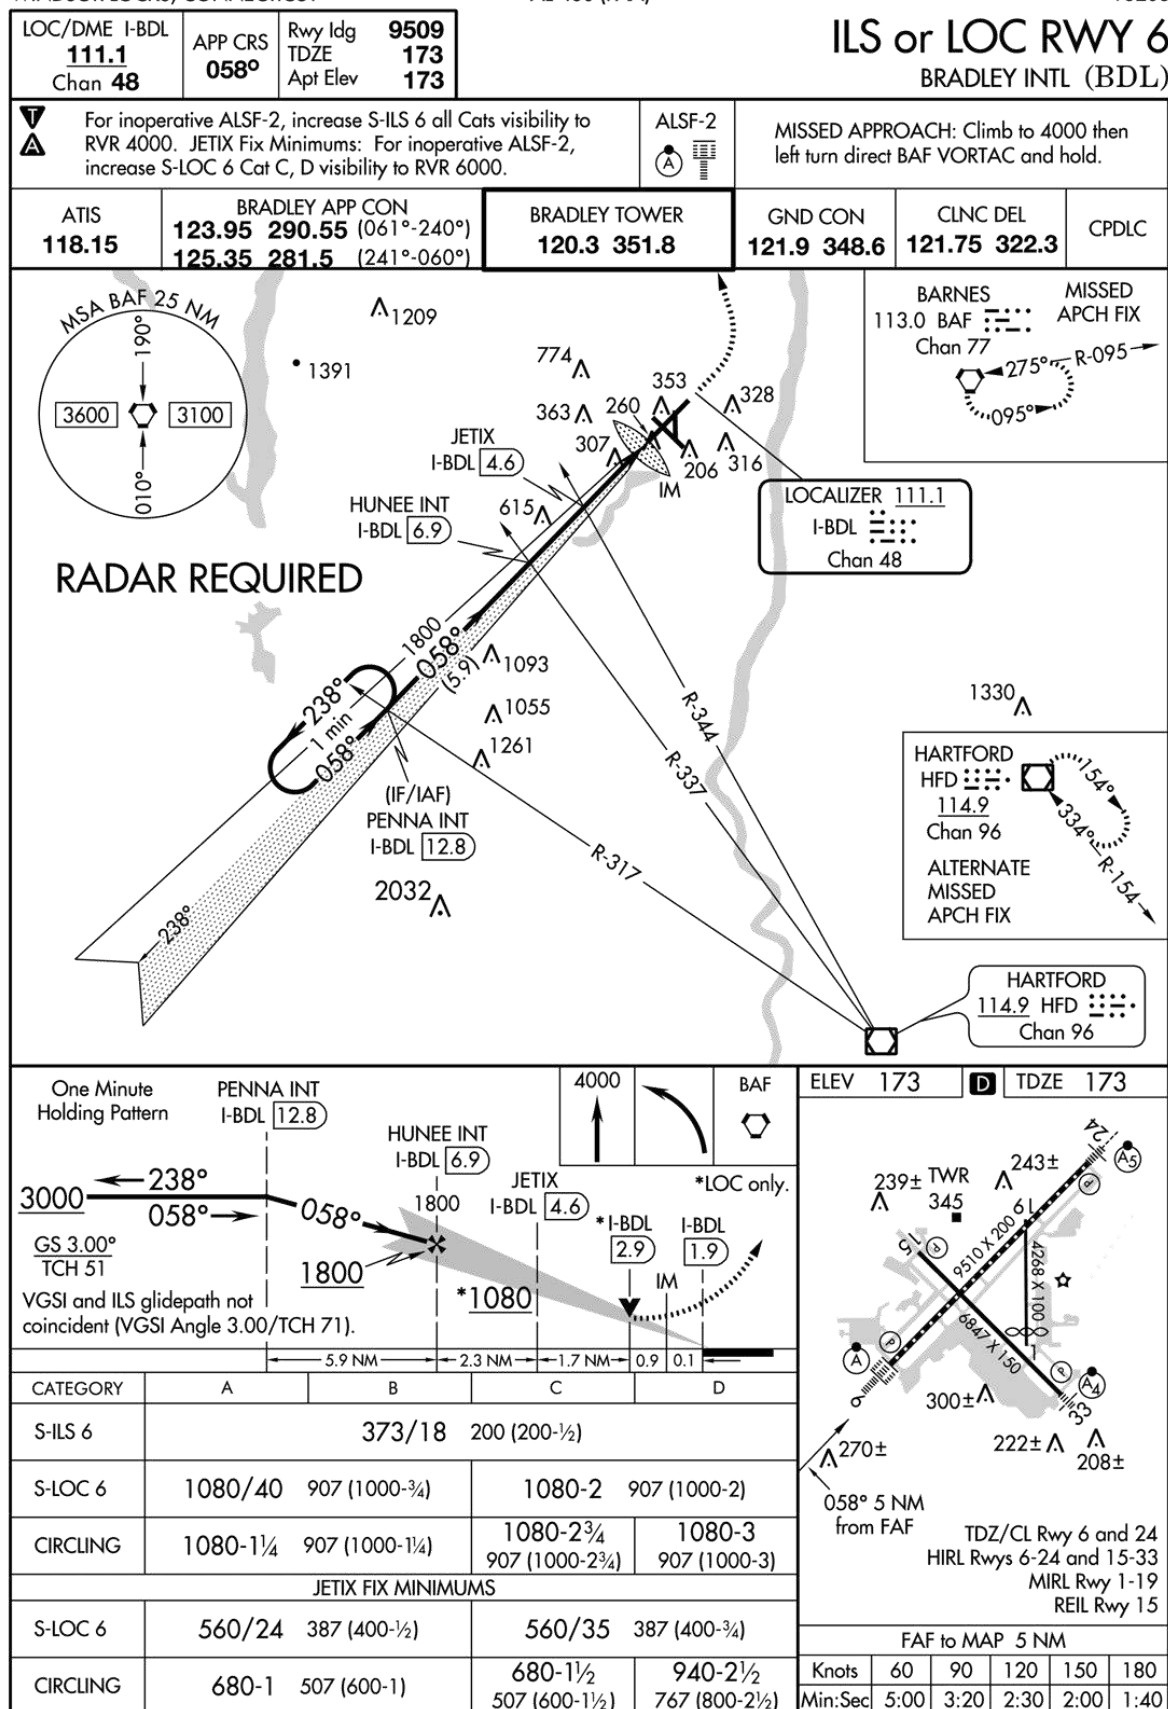


Figure 210. ILS or LOC RWY 6 (CAT I) (BDL).

(STAKK3.STAKK) 12040

STAKK THREE DEPARTURE

HELENA RGNL (HLN)
HELENA, MONTANA

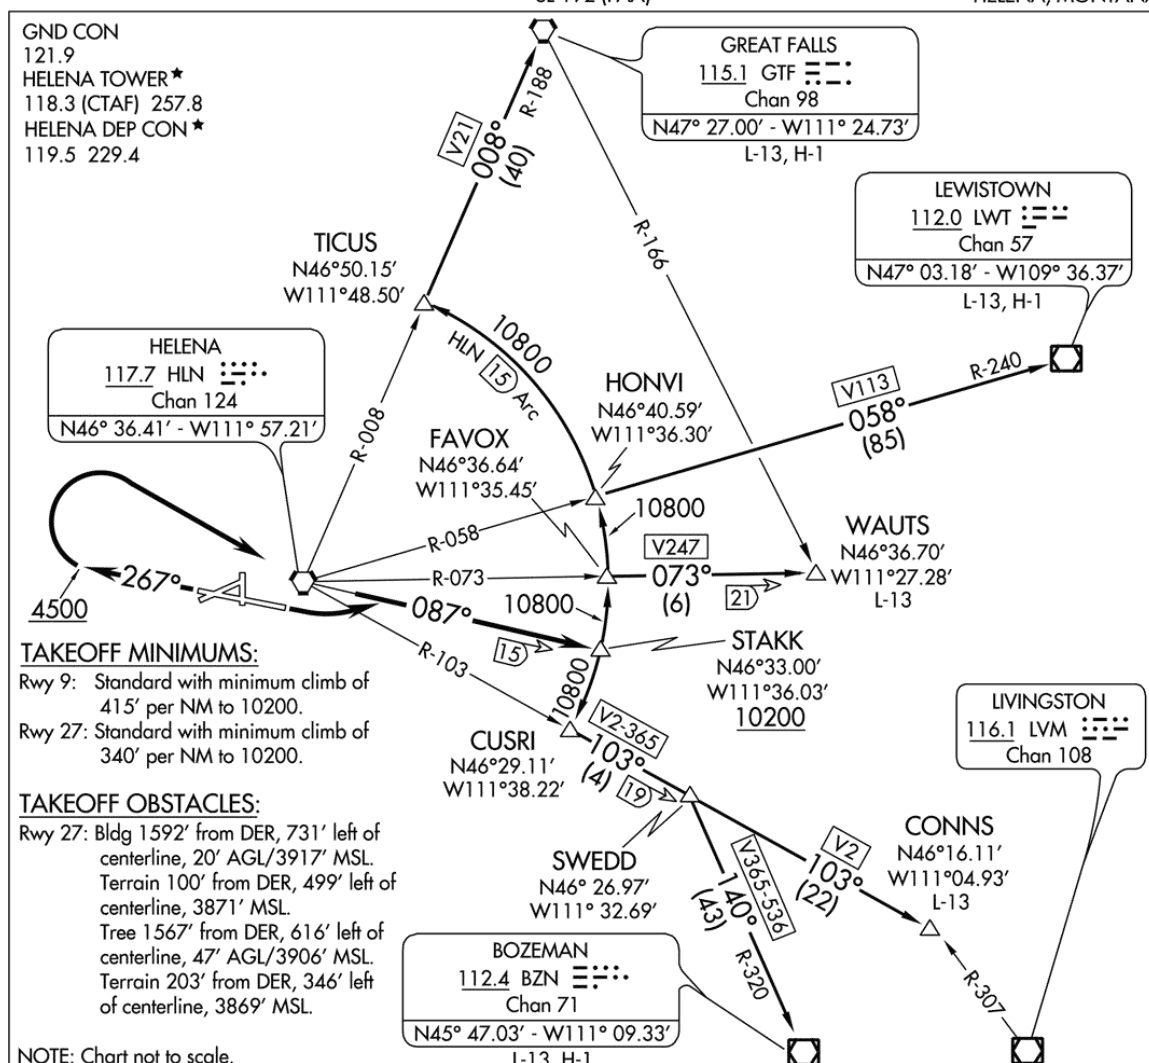

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 9: Climbing left turn to intercept HLN R-087 to cross STAKK at or above 10200. Thence via transition.

TAKEOFF RUNWAY 27: Climb heading 267° to 4500 then climbing right turn direct HLN VORTAC. Continue climb on HLN R-087 to cross STAKK at or above 10200. Thence via transition.

BOZEMAN TRANSITION (STAKK3.BZN): From over STAKK via 15 DME Arc to CUSRI INT, then via HLN R-103 to SWEDD INT, then via BZN R-320 to BZN VOR/DME.

CONNS TRANSITION (STAKK3.CONNS): From over STAKK via 15 DME Arc to CUSRI INT, then via HLN R-103 to SWEDD INT, then via HLN R-103 to CONNS INT.

GREAT FALLS TRANSITION (STAKK3.GTF): From over STAKK via 15 DME Arc to FAVOX, then via 15 DME Arc to HONVI, then via 15 DME Arc to TICUS, then via HLN R-008 and GTF R-188 to GTF VORTAC.

LEWISTOWN TRANSITION (STAKK3.LWT): From over STAKK via 15 DME Arc to FAVOX, then via 15 DME Arc to HONVI, then via HLN R-058 and LWT R-240 to LWT VOR/DME.

WATTS TRANSITION (STAKK3.WATTS): From over STAKK via 15 DME Arc to FAVOX, then via HLN R-073 to WATTS INT.

STAKK THREE DEPARTURE

(STAKK3.STAKK) 12040

HELENA, MONTANA
HELENA RGNL (HLN)

Figure 211. STAKK THREE DEPARTURE (STAKK3.STAKK) (HLN).

©ASA

BILLINGS, MONTANA

AL-48 (FAA)


13290

WAAS CH 56222 W28A	APP CRS 278°	Rwy Idg 10521 THRE 3488 Apt Elev 3652
--	------------------------	--


RNAV (GPS) RWY 28R

BILLINGS LOGAN INTL (BIL)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 21°C (69°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.			MISSED APPROACH: Climb to 5900 direct WIBON and hold.	
ATIS 126.3	BILLINGS APP CON 120.5 284.6	BILLINGS TOWER 127.2 257.8	GND CON 121.9	CLNC DEL 121.9

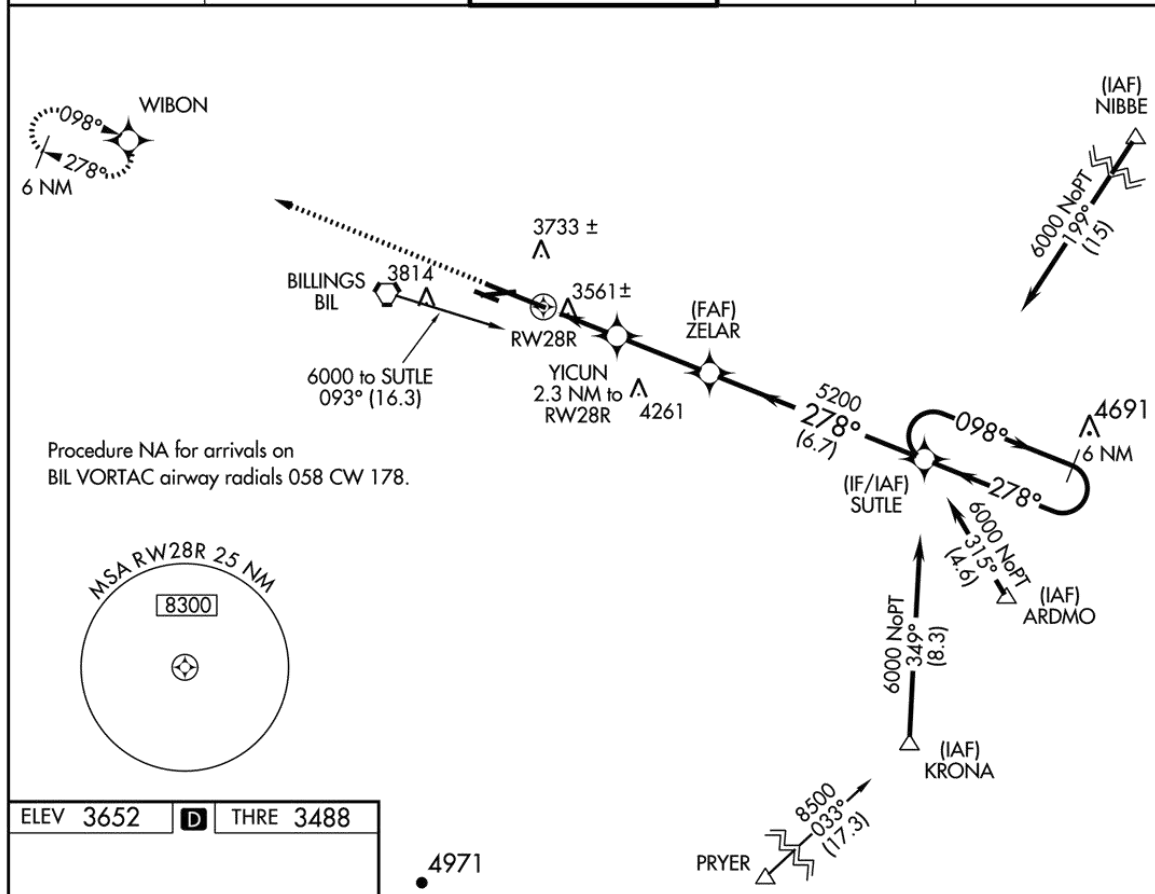

ELEV 3652 **D** THRE 3488

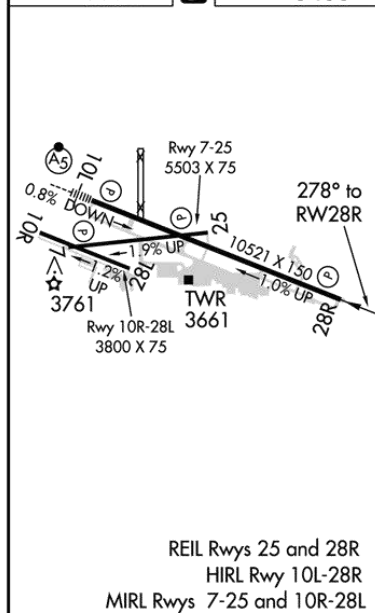

5900 WIBON *LNAV only *0.9 NM to RW28R YICUN 2.3 NM to RW28R ZELAR 5200 SUTLE 6000 6 NM Holding Pattern GS 3.00° TCH 59				
CATEGORY	A	B	C	D
LPV DA	3738-3/4	250 (100-3/4)		
LNAV/VNAV DA	3757-7/8	269 (200-7/8)		
LNAV MDA	3820-1	332 (200-1)		
CIRCLING	4160-1 508 (600-1)	4180-1 528 (600-1)	4180-1 1/2 528 (600-1 1/2)	4220-2 568 (600-2)

BILLINGS, MONTANA

Amdt 2 05APR12

45°48'N-108°33'W

BILLINGS LOGAN INTL (BIL)

RNAV (GPS) RWY 28R

©ASA

Figure 212. RNAV (GPS) RWY 28R (BIL).

BILLINGS, MONTANA

AL-48 (FAA)




13290

VORTAC BIL 114.5 Chan 92	APP CRS 262°	Rwy Idg THRE 3488 Apt Elev 3652
---------------------------------------	------------------------	---

VOR/DME RWY 28R

BILLINGS LOGAN INTL (BIL)

V Visibility reduction by helicopters NA		MISSED APPROACH: Climb to 6000 direct BIL VORTAC and hold, continue climb-in-hold to 6000.		
ATIS 126.3	BILLINGS APP CON 120.5 284.6	BILLINGS TOWER 127.2 257.8	GND CON 121.9	CLNC DEL 121.9

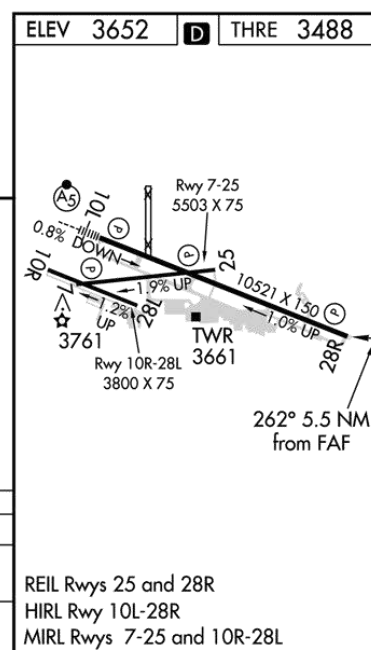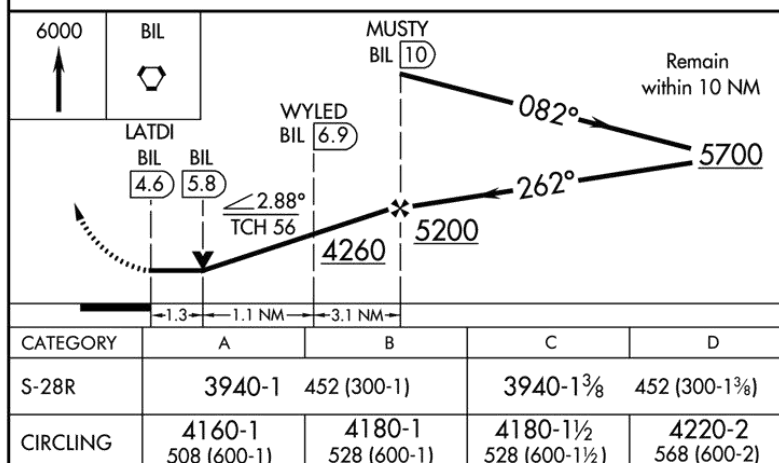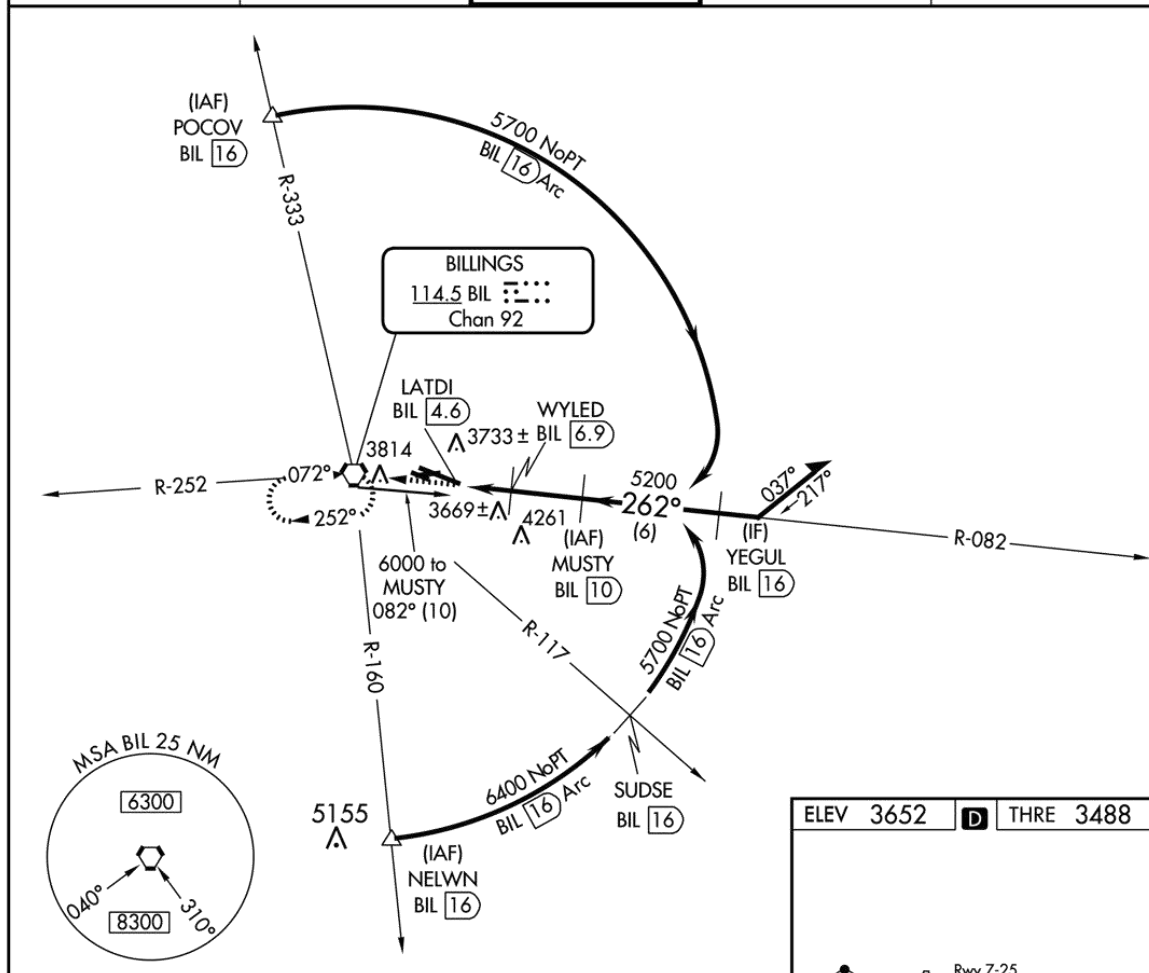

BILLINGS, MONTANA
Amdt 14A 31MAY12

45°48'N-108°33'W

VOR/DME RWY 28R

©ASA

Figure 213. VOR/DME RWY 28R (BIL).

MONTANA

65

BILLINGS LOGAN INTL (BIL) 2 NW UTC-7(-6DT) N45°48.46' W108°32.57'

BILLINGS

3652 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 ARFF Index—See Remarks NOTAM FILE BIL

H-1E, L-13D

RWY 10L-28R: H10521X150 (ASPH-GRVD) S-130, D-170, 2S-175, 2D-285 HIRL

IAP, AD

RWY 10L: MALSR. PAPI(P4L)—GA 3.0° TCH 51'. 0.8% down.

RWY 28R: REIL. PAPI(P4R)—GA 3.0° TCH 56'. Ground. 1.0% up.

RWY 07-25: H5503X75 (ASPH-GRVD) S-12.5 MIRL 1.9% up SW

RWY 07: PAPI(P4L)—GA 3.0° TCH 31'. Ground.

RWY 25: REIL. PAPI(P4R)—GA 3.0° TCH 36'.

RWY 10R-28L: H3800X75 (ASPH) S-12.5 MIRL 1.2% up NW

RWY 10R: Ground.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07: TORA-5503 TODA-5503 ASDA-5503 LDA-5503

RWY 10L: TORA-10521 TODA-10521 ASDA-10521 LDA-10521

RWY 10R: TORA-3800 TODA-3800 ASDA-3800 LDA-3800

RWY 25: TORA-5503 TODA-5503 ASDA-5503 LDA-5503

RWY 28L: TORA-3800 TODA-3800 ASDA-3800 LDA-3800

RWY 28R: TORA-10521 TODA-10521 ASDA-10521 LDA-10521

AIRPORT REMARKS: Attended continuously. Rwy 07-25 and Rwy 10R-28L CLOSED to acft over 12,500 lbs. No customs, remote acft parking, ltd ground handling svc. Migratory waterfowl invof arpt. Twy D 35' wide clsd to acft over 12,500 lbs. Class I, ARFF Index C. PPR unscheduled air carrier ops with more than 30 passenger seats ctc arpt ops 406-657-8496. ARFF Index B from 0900-1300Z±. 180° turns Rwy 10L-28R by acft over 25,000 lbs prohibited. For MIRL Rwy 10R-28L and Rwy 07-25, HIRL Rwy 10L-28R, MALSR Rwy 10L and REIL Rwy 25 and Rwy 28R ctc twr.

WEATHER DATA SOURCES: ASOS (406) 248-2773 LLWAS.

COMMUNICATIONS: ATIS 126.3 UNICOM 122.95

RCO 122.55 (GREAT FALLS RADIO)

Ⓡ APP/DEP CON 119.2 (EAST) 120.5 (WEST)

TOWER 127.2 GND CON 121.9 CLNC DEL 121.9

PRE TAXI CLNC 121.9

AIRSPACE: CLASS C svc ctc APP CON


RADIO AIDS TO NAVIGATION: NOTAM FILE BIL.

(H) VORTACW 114.5 BIL Chan 92 N45°48.51' W108°37.48' 077° 3.4 NM to fld. 3811/14E.

SAIGE NDB (LOM) 251 BI N45°51.13' W108°41.67' 099° 6.9 NM to fld.

ILS 110.3 I-BIL Rwy 10L. Class IB. LOM SAIGE NDB.

ILS/DME 111.5 I-BMO Chan 52 Rwy 28R. Class IA. Localizer unusable beyond 20° left and right of course.

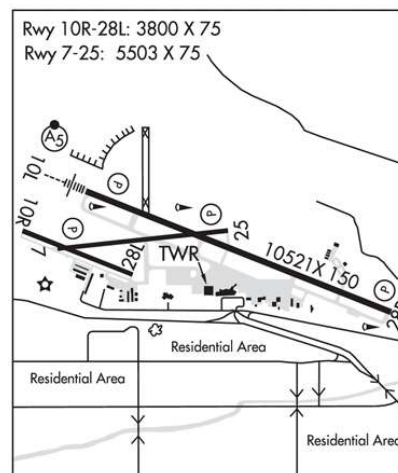

BLACK BUTTE NORTH (See WINIFRED on page 106)

BOULDER (3U9) 2 S UTC-7(-6DT) N46°12.70' W112°06.46'

GREAT FALLS

4968 NOTAM FILE GTF

RWY 11-29: 3675X72 (TURF) 1.6% up W

RWY 11: Hill.

RWY 29: Road.

AIRPORT REMARKS: Unattended. No snow removal. Rwy 11-29 thlds marked with faded red cones, edges marked with white cones. -2' drainage ditch +1' berm W side of rwy full length, 43' from Rwy 11-29 centerline.

COMMUNICATIONS: CTAF 122.9


BOWMAN FLD (See ANACONDA on page 62)

Figure 214. Excerpt from Chart Supplement.

©ASA

TRUCKEE, CALIFORNIA

AL-6021 (FAA)

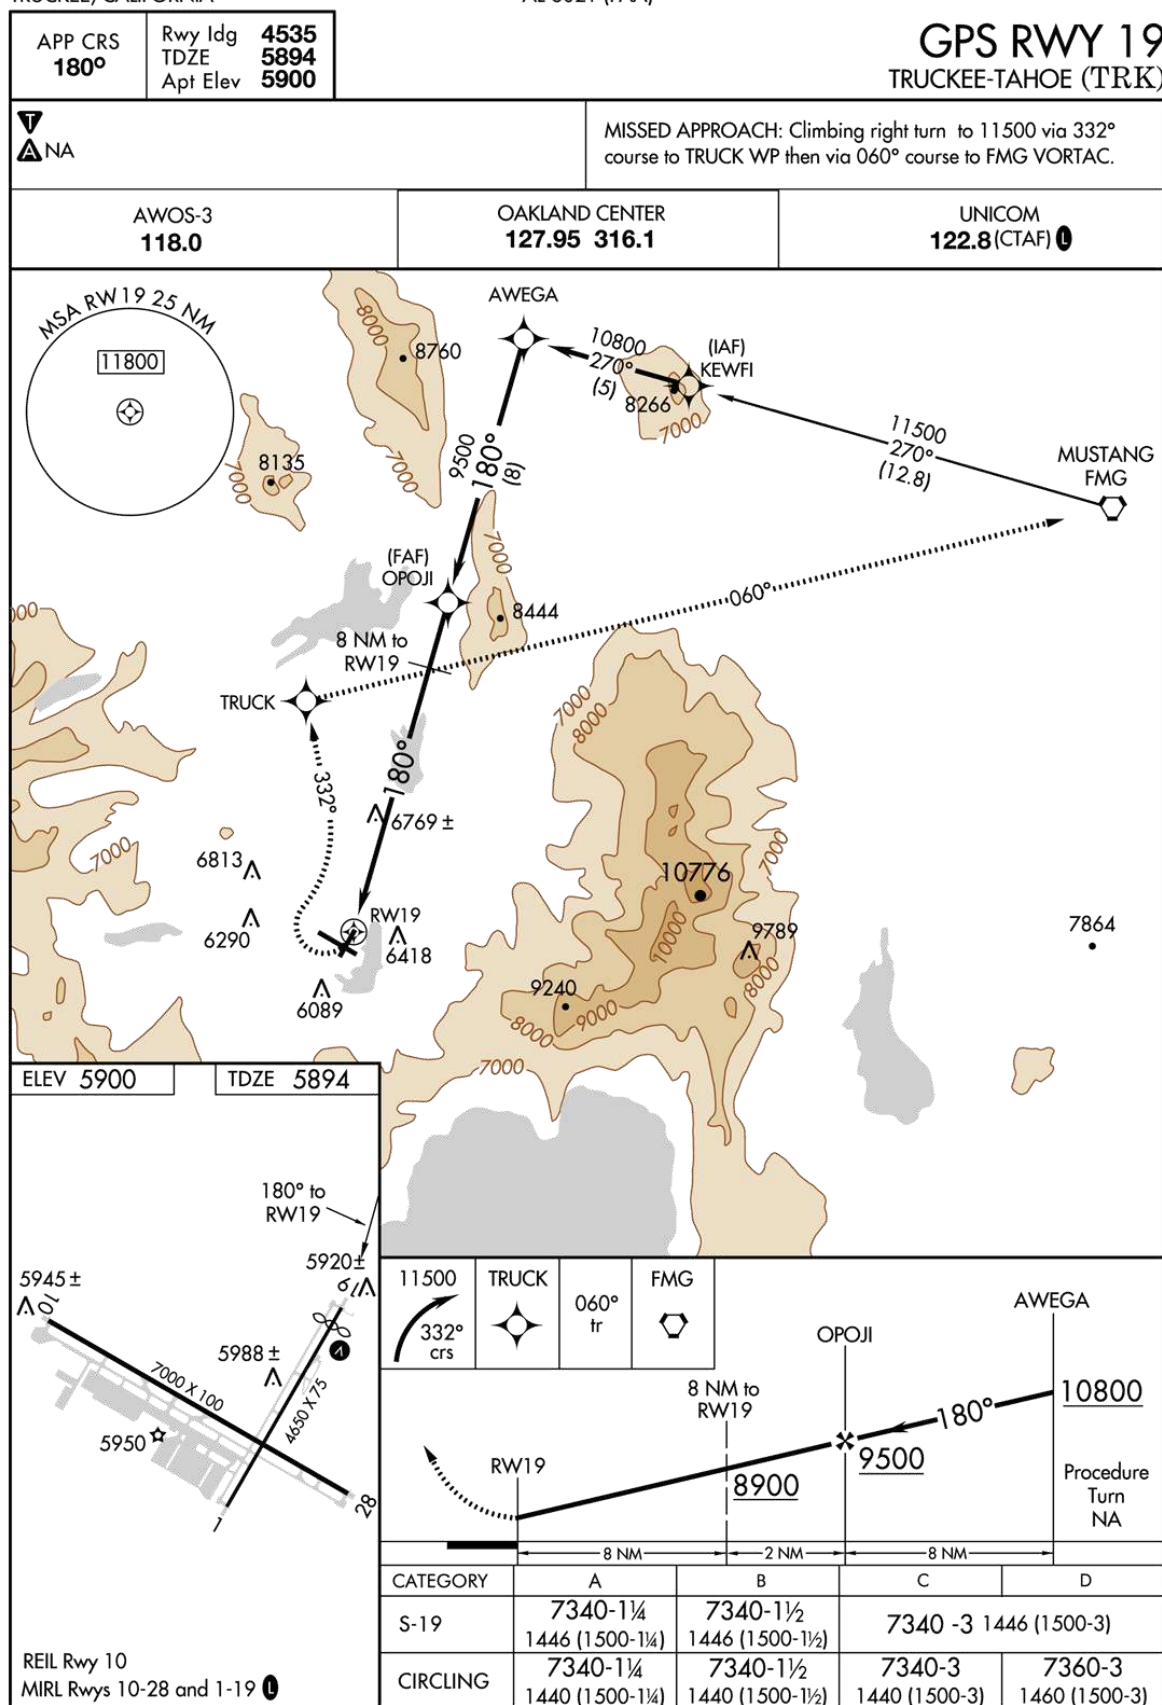

TRUCKEE, CALIFORNIA
Orig 13290

39°19'N-120°08'W

TRUCKEE-TAHOE (TRK)
GPS RWY 19
©ASA

Figure 215. GPS RWY 19 (TRK).

(RENO9.FMG) 16035

RENO NINE DEPARTURE

SL-346 (FAA)

RENO/TAHOE INTL (RNO)
RENO, NEVADA



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 16L/R: Climb on heading 164° and I-RNO localizer south course.
Thence. . . .

TAKEOFF RUNWAY 25: Climb heading 254° to 5000 then climbing right turn heading 340°.
Thence. . . .

TAKEOFF RUNWAYS 34L/R: Climb heading 330° CW 360° as assigned by ATC.
Thence. . . .

. . . .All aircraft maintain FL190 or assigned altitude. Expect clearance to requested altitude 5 minutes after departure. Expect RADAR vectors to assigned route/fix.

LOST COMMUNICATIONS: If not in contact with departure control within one minute after takeoff, maintain assigned heading until passing 10000, thence. . . .

. . . .RUNWAYS 16L/R DEPARTURES: Turn left direct FMG VORTAC, then via assigned route.

. . . .RUNWAYS 25 and 34L/R DEPARTURES: Turn right direct FMG VORTAC, then via assigned route.

RENO NINE DEPARTURE

(RENO9.FMG) 04FEB16

RENO, NEVADA
RENO/TAHOE INTL (RNO)

Figure 216A. RENO NINE DEPARTURE (RENO9.FMG) (RNO).


©ASA

(RENO9.FMG) 16035

RENO NINE DEPARTURE

SL-346 (FAA)

RENO/TAHOE INTL (R.NO)
RENO, NEVADA

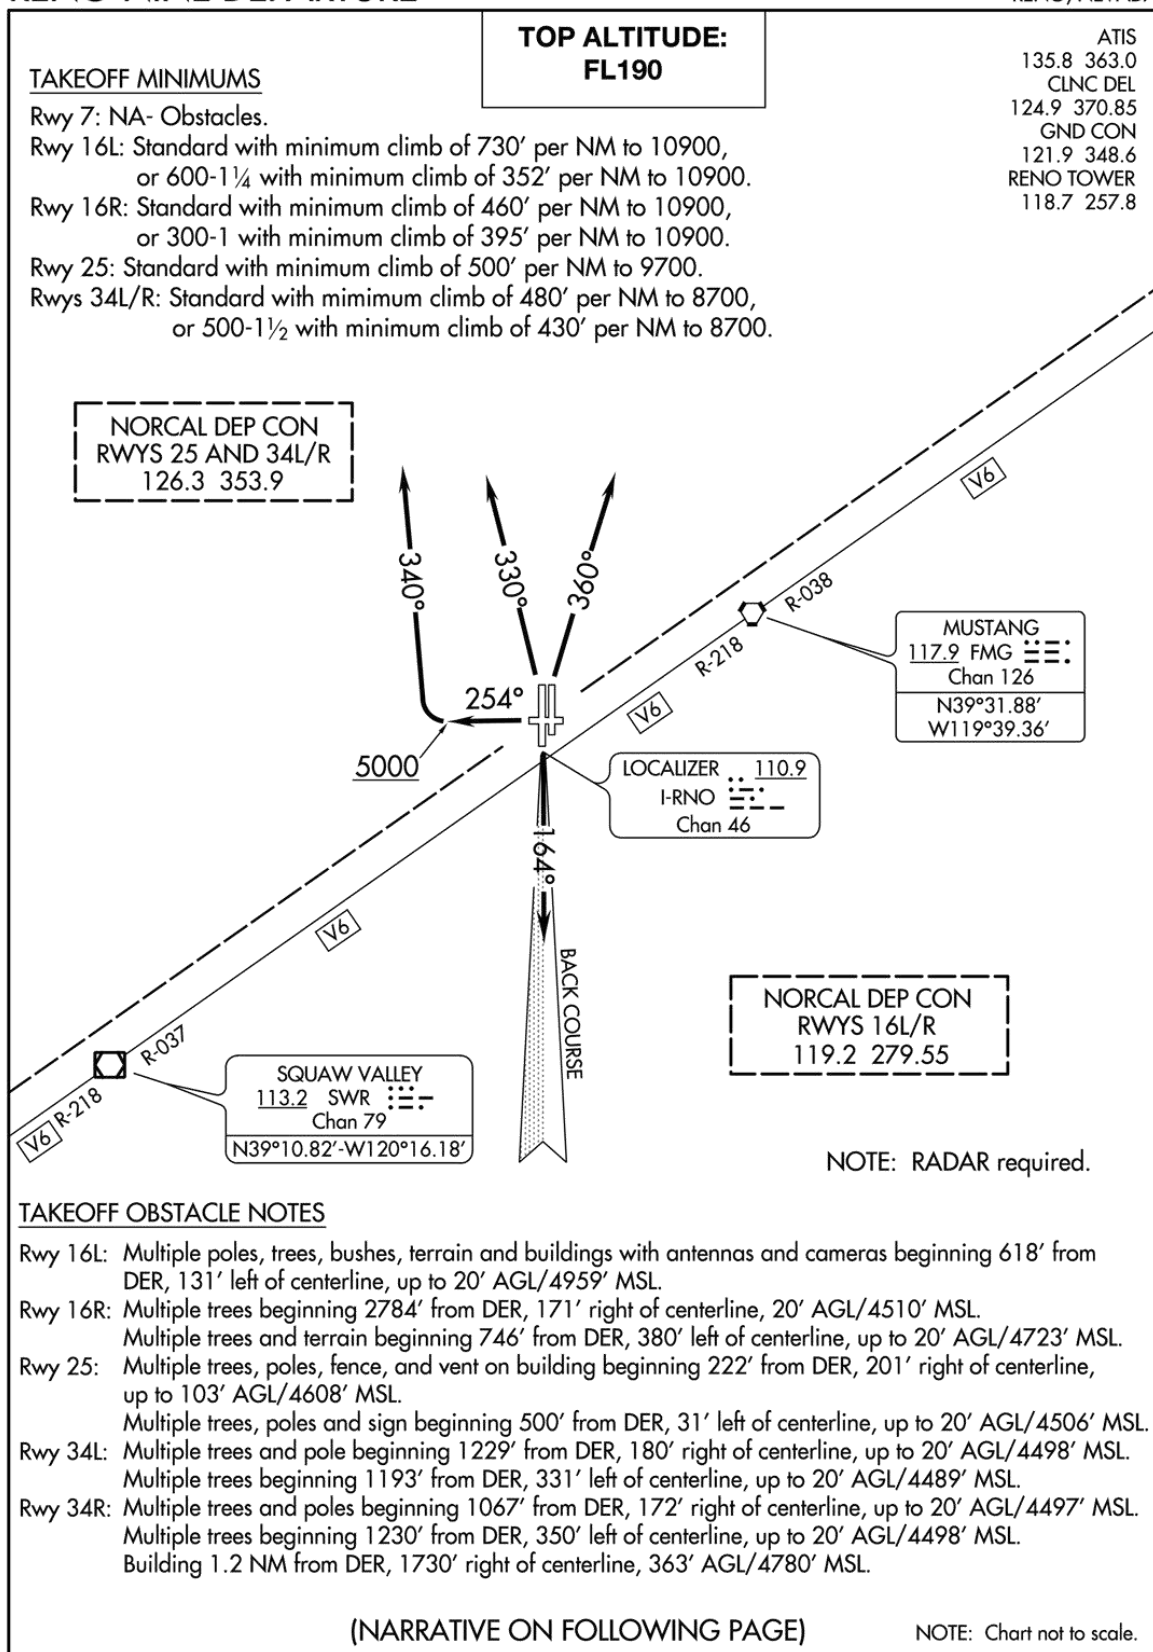

RENO NINE DEPARTURE

(RENO9.FMG) 04FEB16

RENO, NEVADA
RENO/TAHOE INTL (R.NO)


Figure 216. RENO NINE DEPARTURE (RENO9.FMG) (RNO).

©ASA

13290

ILS or LOC RWY 13
DES MOINES INTL (DSM)

MISSED APPROACH: Climb to 1600 then climbing right turn to 3000 direct DSM VORTAC then via DSM R-254 to MIDDLE Int/DSM 12 DME and hold.

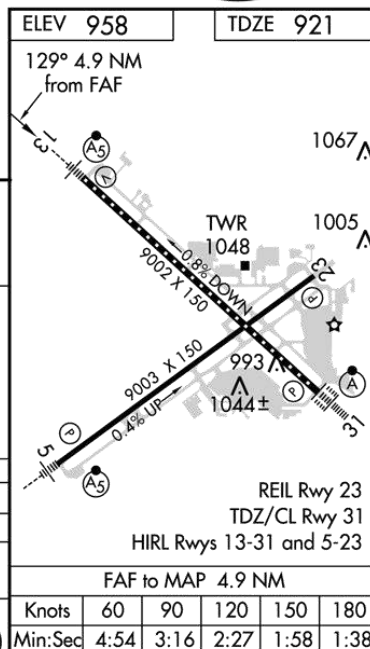A 2988

One Minute Holding Pattern

WATTY INT

1600

3000

DSM

DSM R-254

MILE

3500

309°

129°

129°

2548

2600

CLIVE OM

MM

8.4 NM

4.3 NM

0.6

CATEGORY	A	B	C	D	E
S-ILS 13	1121/24 200 (200-½)				
S-LOC 13	1380/24 459 (500-½)	1380/40 459 (500-1¾)	1380/50 459 (500-1)		
CIRCLING	1420-1 462 (500-1)	1420-1½ 462 (500-1½)	1520-2 562 (600-2)	1760-2¾ 802 (900-2¾)	

DES MOINES INTL (DSM)
ILS or LOC RWY 13

©ASA

DES MOINES, IOWA

AL-117 (FAA)

13290

WAAS CH 69202 W05A	APP CRS 051°	Rwy Idg 9003 TDZE 931 Apt Elev 958
--	------------------------	---

RNAV (GPS) RWY 5

DES MOINES INTL (DSM)

▼ DME/DME RNP-0.3 NA.
▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (116°F).
If local altimeter setting not received, use Ankeny Rgnl altimeter setting and increase all DAs/MDAs 40 feet.
Baro-VNAV and VDP NA when using Ankeny Rgnl altimeter setting.
For inoperative MALSR, increase LPV all Cats. visibility to RVR 5000 and LNAV/VNAV all Cats. visibility to RVR 6000 and LNAV Cat. D visibility to RVR 6000.

MALSR



MISSED APPROACH: Climb to 3100 direct IOWAA and hold.


ATIS
119.55 251.05

DES MOINES APP CON
123.9 307.15


DES MOINES TOWER
118.3 257.8

GND CON
121.9 348.6

CLNC DEL
134.15 317.55

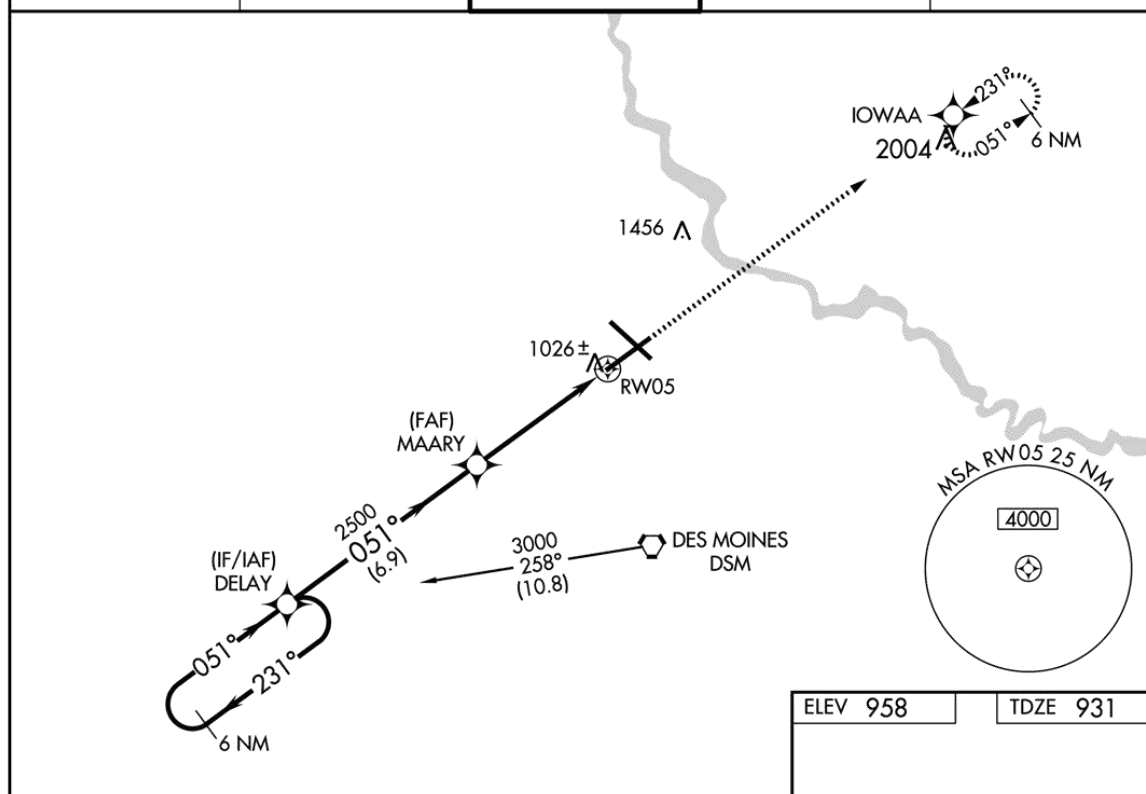

6 NM Holding Pattern		DELAY	MAARY	3100	IOWAA
3000 ← 231°		051° →	051°	* 1 NM to RW05	* LNAV only
GS 3.00°			2500	RW05	
TCH 55		6.9 NM	3.7 NM	1 NM	
CATEGORY	A	B	C	D	
LPV DA		1188/24	257 (300-1/2)		
LNAV/VNAV DA		1385/50	454 (500-1)		
LNAV MDA		1320/24	389 (400-1/2)		
CIRCLING	1420-1	462 (500-1)	1420-1 1/2 462 (500-1 1/2)	1520-2 562 (600-2)	

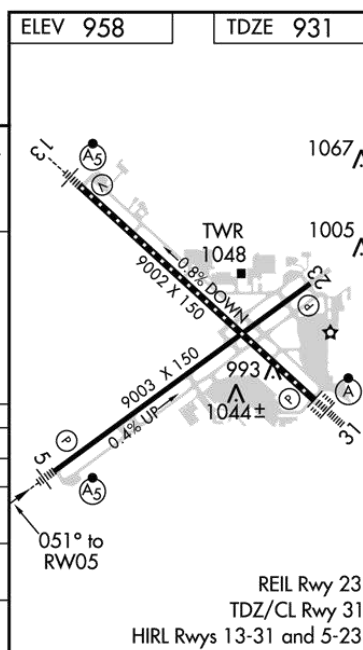

DES MOINES, IOWA
Amdt 1A 28JUN12

41°32'N-93°40'W

DES MOINES INTL (DSM)

RNAV (GPS) RWY 5


©ASA

Figure 218. RNAV (GPS) RWY 5 (DSM).

RIVERSIDE/RUBIDOUX, CALIFORNIA

AL-9974 (FAA)

13290

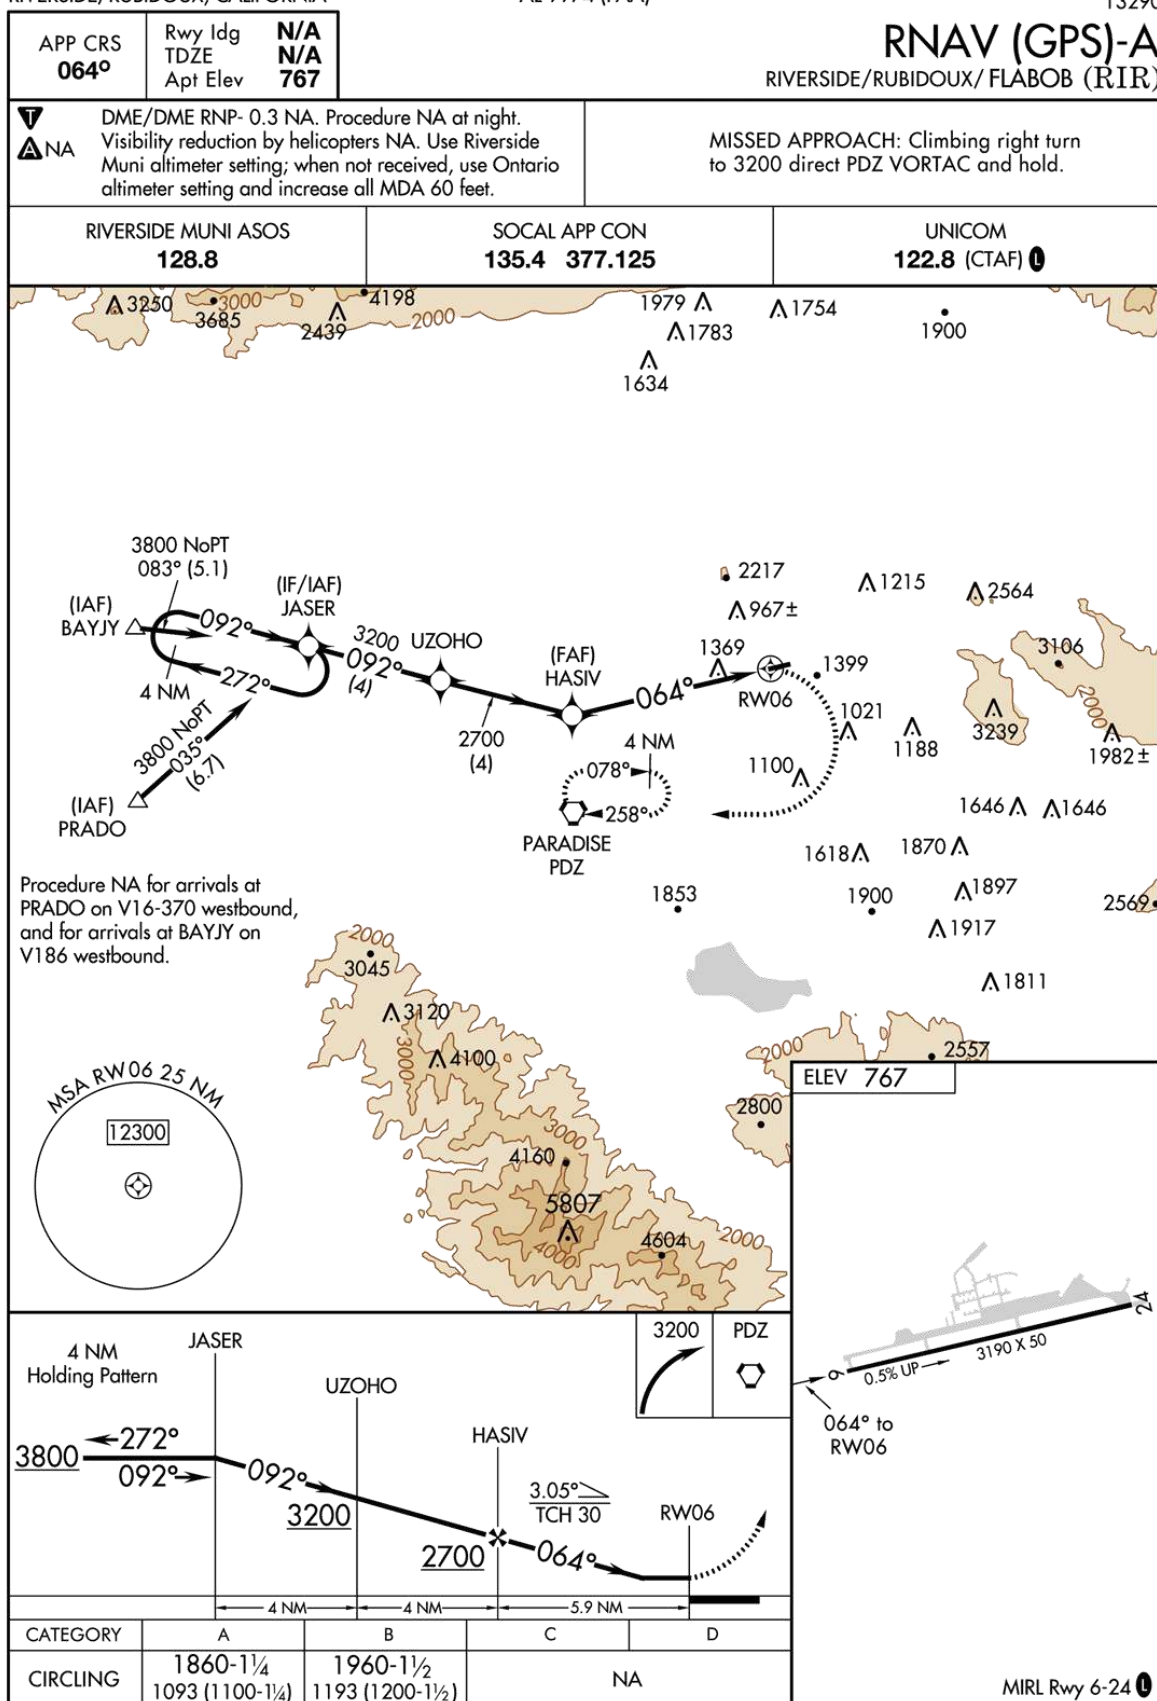

RIVERSIDE/RUBIDOUX, CALIFORNIA

Orig 25AUG11

33°59'N-117°25'W

RIVERSIDE/RUBIDOUX/ FLABOB (RIR)

RNAV (GPS)-A

©ASA

Figure 219. RNAV (GPS)-A (RIR).


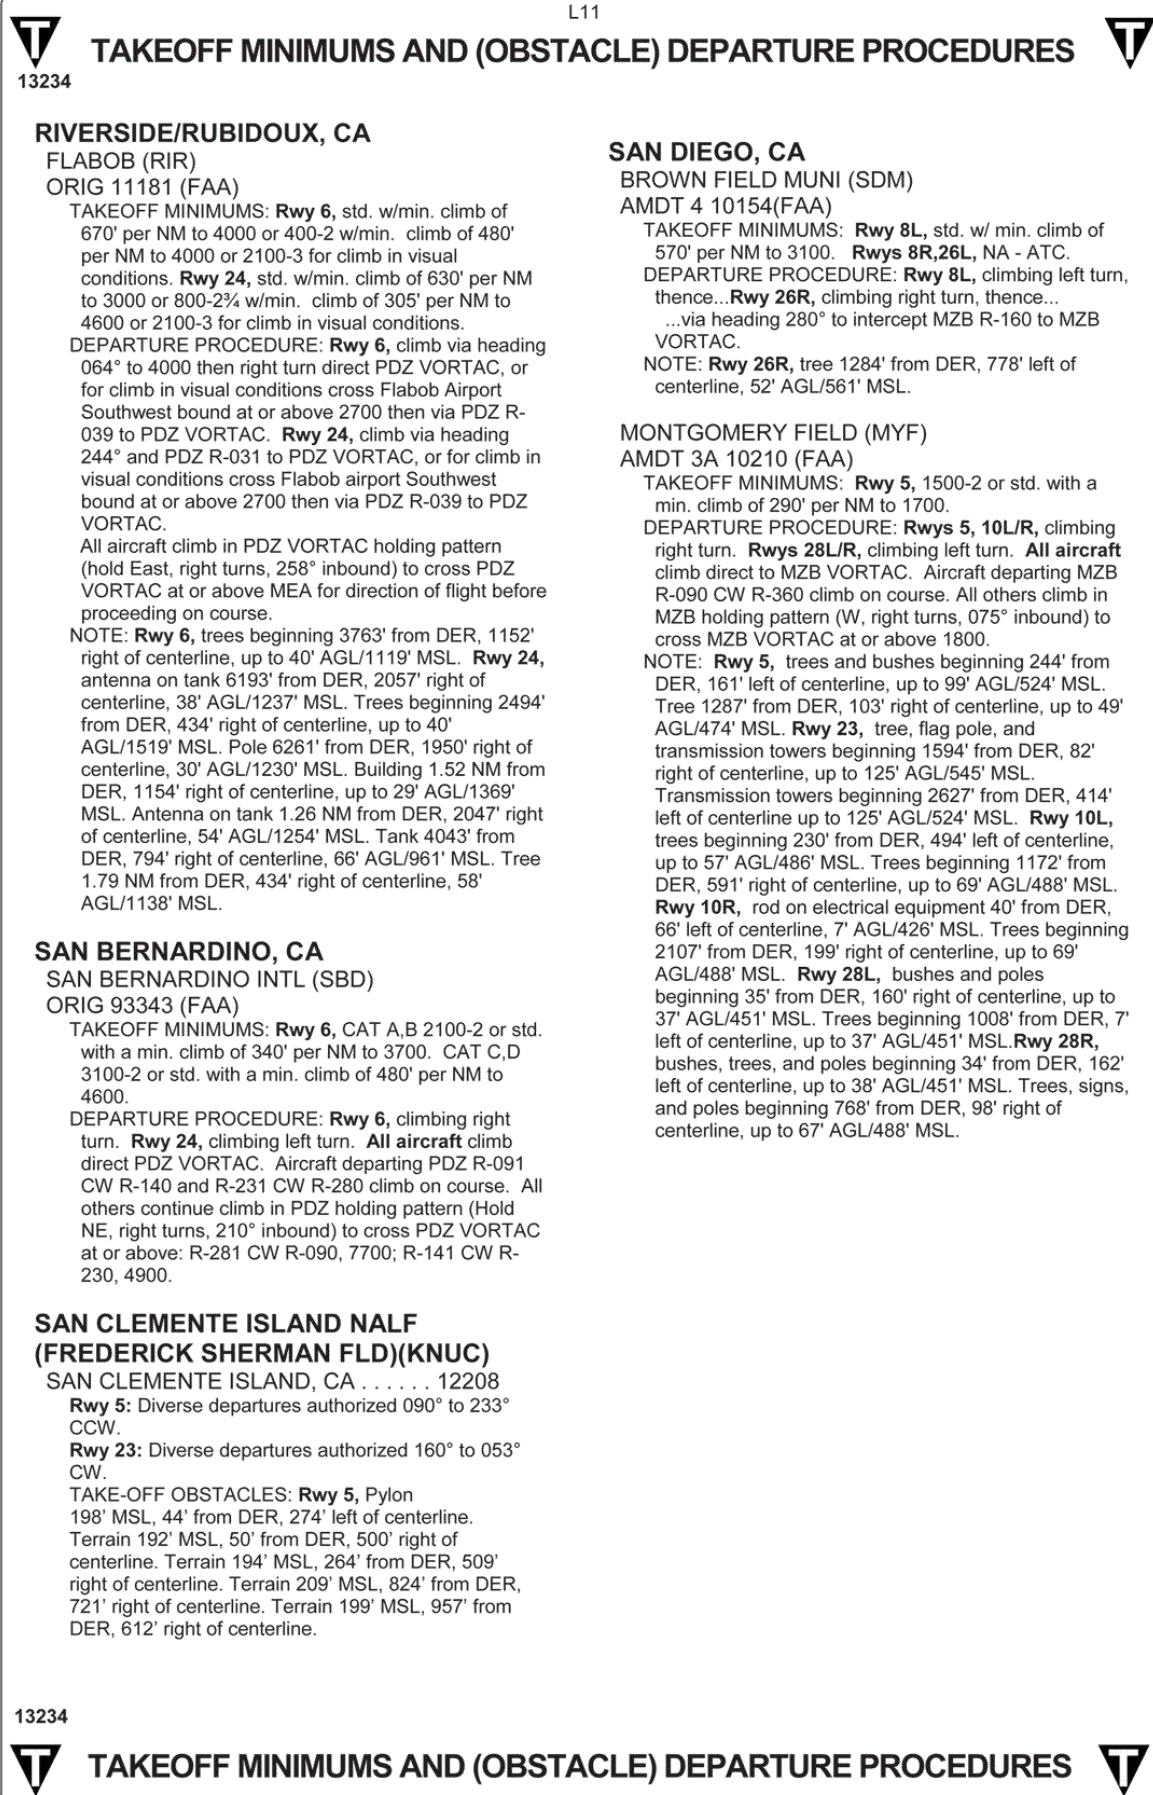


Figure 220. Takeoff Minimums and (Obstacle) Departure Procedures.

©ASA



BURBANK, CALIFORNIA

AL-67 (FAA)

13290

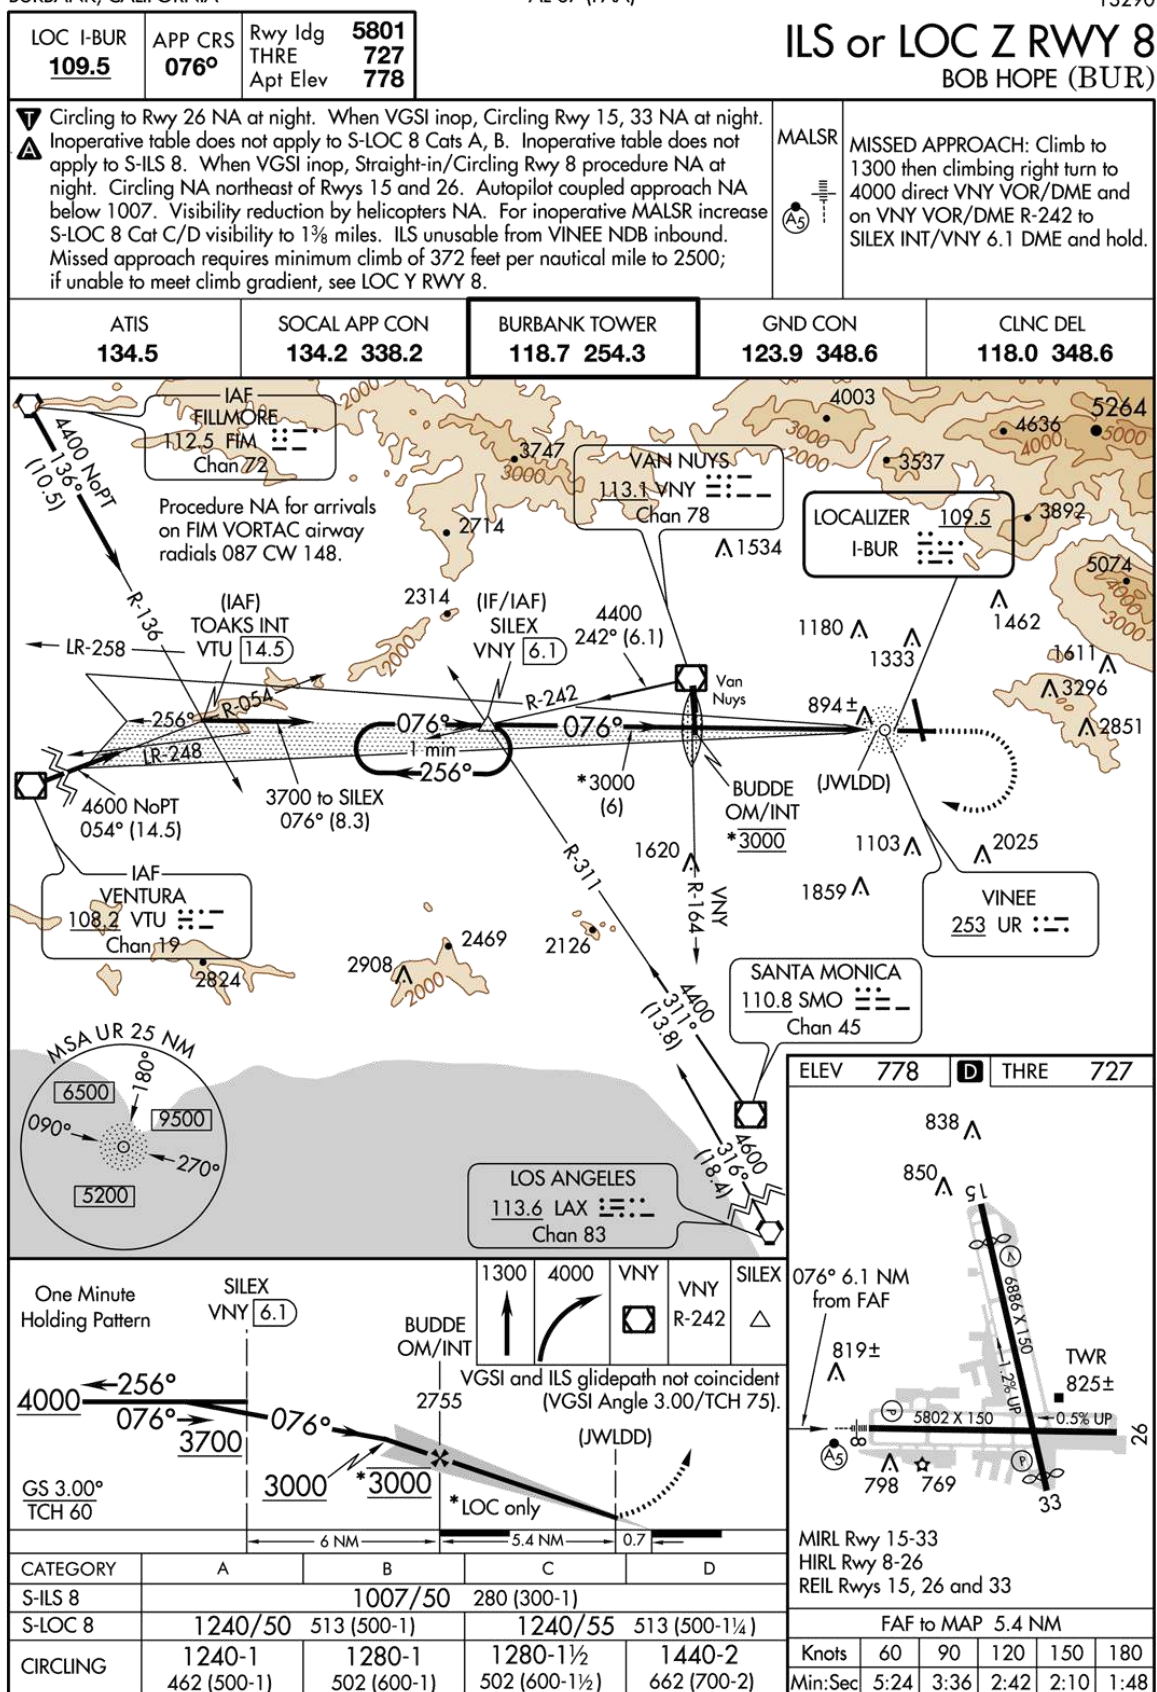


Figure 222. ILS or LOC Z RWY 8 (BUR).

DES MOINES, IOWA

AL-117 (FAA)

13290


LOC/DME I-DSM 110.3 Chan 40	APP CRS 310°	Rwy Idg THRE Apt Elev 9002 958 958
--	------------------------	--

ILS or LOC RWY 31

DES MOINES INTL (DSM)

⚠ For inop ALSF, increase S-ILS 31 Cat E visibility to RVR 4000 and S-LOC 31 Cat E visibility to RVR 6000.	ALSF-2 (A)	MISSED APPROACH: Climb to 1600 then climbing left turn to 3000 on heading 180° and DSM VORTAC R-254 to MIDDLE INT/12 DME and hold.
--	------------------------------	---

ATIS 119.55 251.05	DES MOINES APP CON 123.9 307.15	DES MOINES TOWER 118.3 257.8	GND CON 121.9 348.6	CLNC DEL 134.15 317.55
------------------------------	---	--	-------------------------------	----------------------------------

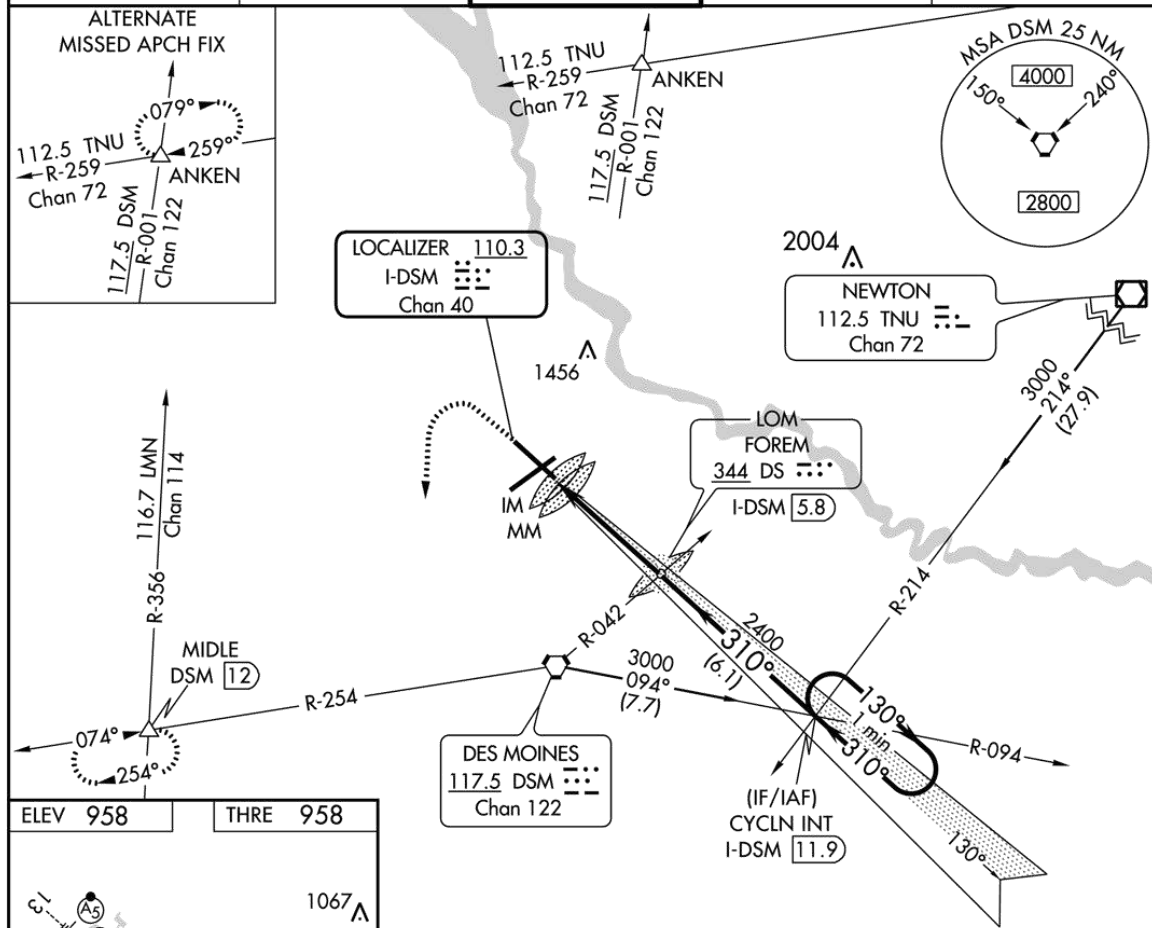

ELEV 958	THRE 958
REIL Rwy 23 TDZ/CL Rwy 31 HIRL Rwy 13-31 and 5-23 FAF to MAP 4.2 NM Knots 60 90 120 150 180 Min:Sec 4:12 2:48 2:06 1:41 1:24	1067 1005 993 1044± 310° 4.2 NM from FAF

1600	3000	DSM R-254	MIDDLE	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 56).	One Minute Holding Pattern
hdg 180°				FOREM LOM/INT I-DSM 5.8	CYCLN INT I-DSM 11.9
*LOC only	I-DSM 1.6	*I-DSM 2.6	2365	310°	130°
	IM	MM			3000
	0.2	0.3	0.5	3.2 NM	6.1 NM
CATEGORY	A	B	C	D	E
S-ILS 31	1158/18 200 (200-½)				
S-LOC 31	1320/24	362 (400-½)	1320/35	362 (400-¾)	
CIRCLING	1420-1	462 (500-1)	1420-1½	1520-2	1760-2¾
			462 (500-1½)	562 (600-2)	802 (900-2¾)

DES MOINES, IOWA
Amdt 23A 26JUL12

41°32'N-93°40'W

DES MOINES INTL (DSM)

ILS or LOC RWY 31

©ASA

Figure 223. ILS or LOC RWY 31 (DSM).

LEADVILLE, COLORADO

AL-9146 (FAA)


APP CRS 161°	Rwy Idg 6400
TDZE 9928	Apt Elev 9928

GPS RWY 16


LEADVILLE/LAKE COUNTY (LXV)

NA	MISSED APPROACH: Climb to 16000 via 158° course to MORYU WP, then via 106° course to TERRO WP and hold.
------------------	--

ASOS 118.375	DENVER CENTER 119.85 363.15	UNICOM 122.8 (CTAF) 0
------------------------	---------------------------------------	---------------------------------

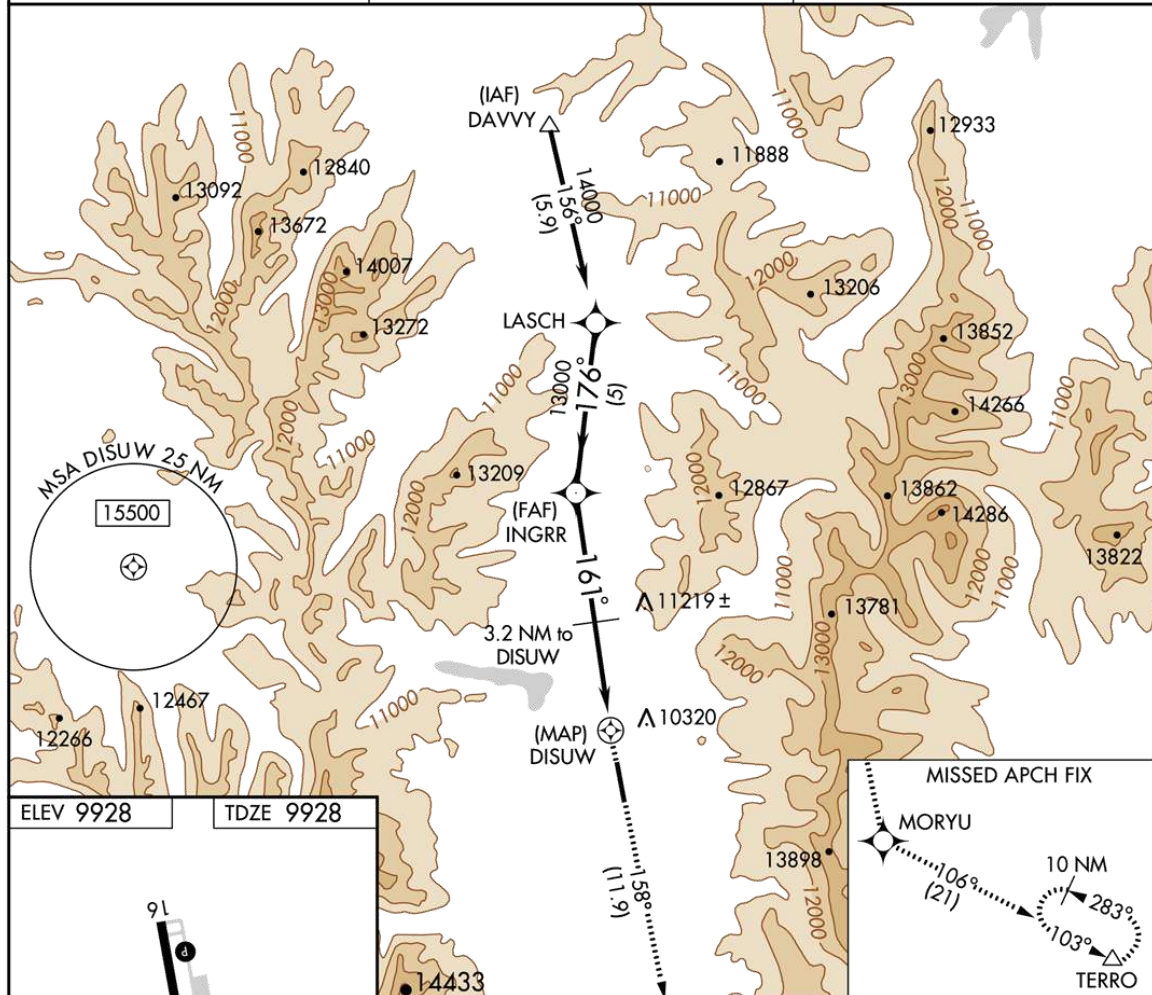

ELEV 9928 TDZE 9928

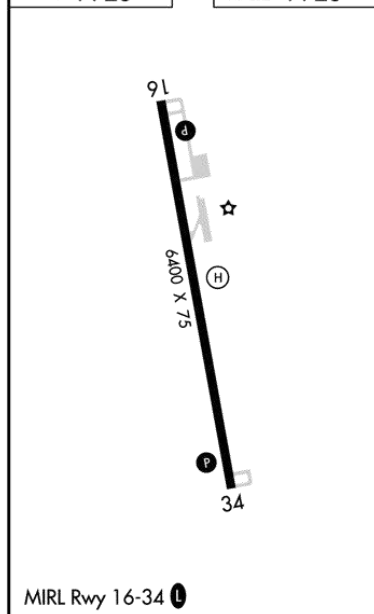

MIRL Rwy 16-34 0

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 45).			
Procedure Turn NA			
14000 176° 13000 161° 11540			
5 NM 3.8 NM 3.2 NM 1 NM			
CATEGORY	A	B	C D
S-16	11360-1¼ 1432 (1500-1¼)	11360-1½ 1432 (1500-1½)	NA
CIRCLING	11360-1¼ 1432 (1500-1¼)	11360-1½ 1432 (1500-1½)	NA

LEADVILLE, COLORADO

Orig 12320

39°13'N - 106°19'W

LEADVILLE/ LAKE COUNTY (LXV)

GPS RWY 16

©ASA

Figure 224. GPS RWY 16 (LXV).

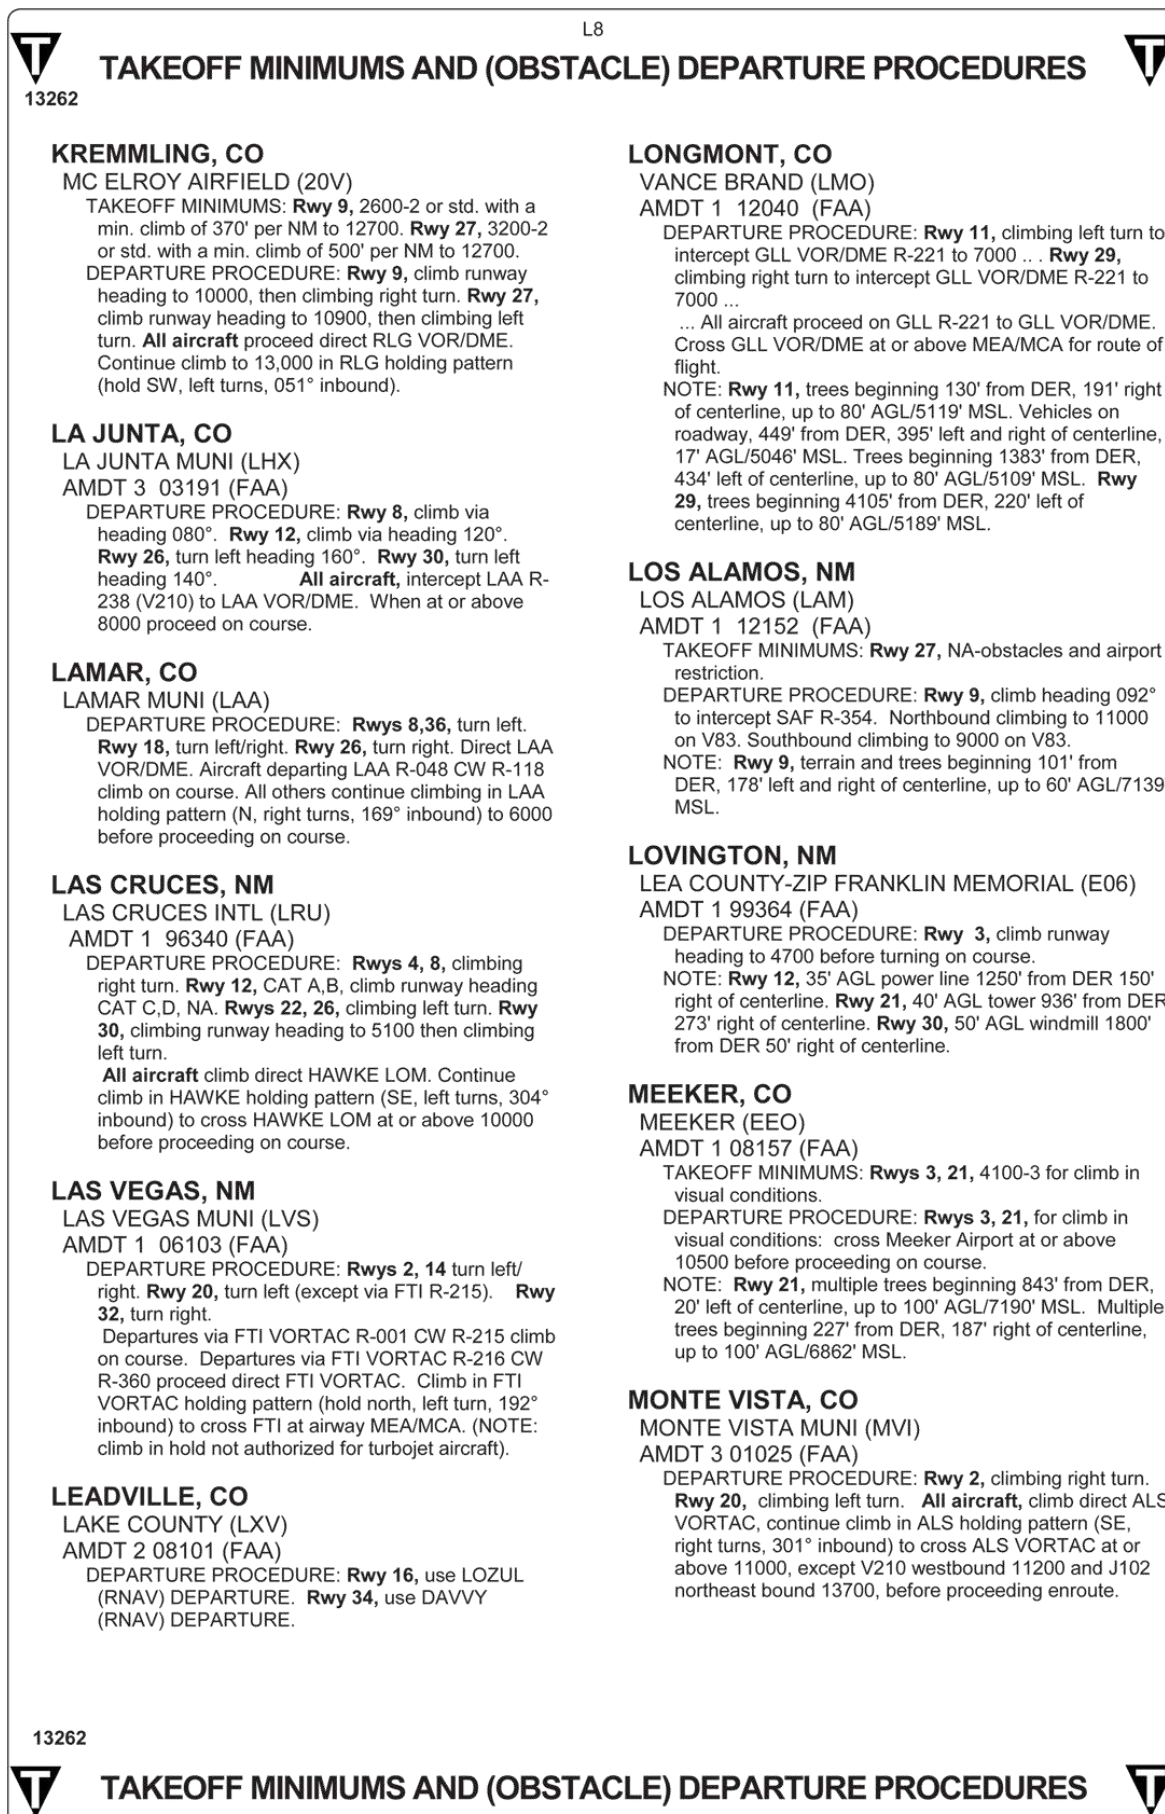


Figure 225. Takeoff Minimums and (Obstacle) Departure Procedures.

©ASA

242

COLORADO

LAMAR MUNI (LAA) 3 SW UTC-7(-6DT) N38°04.18' W102°41.31'

3706 B S4 FUEL 100LL, JET A OX 1, 3 NOTAM FILE LAA

RWY 18-36: H6304X100 (CONC-GRVD) S-45, D-55, 2D-100 MIRL
0.4% up S

RWY 18: REIL. VASI(V4L)—GA 3.0° TCH 45'. Road.

RWY 36: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Hill.

RWY 08-26: H5001X60 (ASPH-PFC) S-35, D-50, 2D-95 MIRL

RWY 08: PAPI(P2L)—GA 3.0° TCH 30'. Road.

RWY 26: REIL. PAPI(P2L)—GA 3.0° TCH 31'. Fence.

AIRPORT REMARKS: Attended 1500-0100Z†. For svc after hrs phone 719-336-7701. Be alert, intensive USAF student training invof Colorado Springs and Pueblo Colorado. Rwy 18-36 now has distance remaining signs. Twr 500' AGL 4.5 mile SE unlighted. ACTIVATE MIRL Rwy 08-26 and Rwy 18-36—CTAF. NOTE: See Special Notices—Aerobatic Operations in Colorado. USAF 306 FTG Flight Training Areas, Vicinity of Colorado Springs and Pueblo Colorado.

WEATHER DATA SOURCES: ASOS 135.625 (719) 336-3854.


COMMUNICATIONS: CTAF/UNICOM 122.8

DENVER CENTER APP/DEP CON 133.4

RADIO AIDS TO NAVIGATION: NOTAM FILE LAA.

(H) VORW/DME 116.9 LAA Chan 116 N38°11.83'
W102°41.25' 168° 7.6 NM to fld. 3944/12E.

WICHITA
H-5A, L-10G
IAP

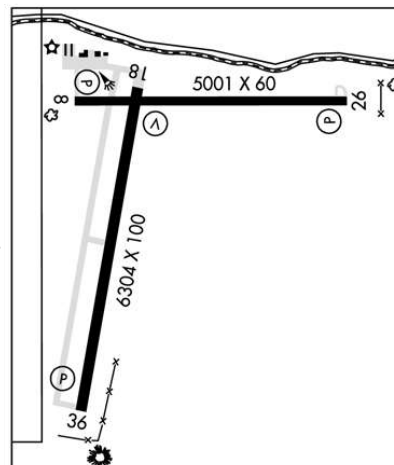

LAS ANIMAS

CITY OF LAS ANIMAS – BENT CO (7V9) 1 S UTC-7(-6DT) N38°03.24' W103°14.31'

3915 S4 NOTAM FILE DEN

RWY 08-26: H3870X40 (ASPH) S-5 HIRL 0.4% up W

RWY 08: REIL. Fence.

RWY 26: REIL. Road.

AIRPORT REMARKS: Attended Mon-Sat 1500-0000Z†. Be alert, intensive USAF student training invof Colorado Springs and Pueblo Colorado. Rwy 26 has +30' poles 105' from thld 210' left of extd rwy centerline, +15' tank 321' from rwy end 270' right of centerline. Thld lgts NSTD; three lgts each end. Thld lgts OTS indef. Rwy 08 thld lgts 23' from thld. Rwy 26 thld lgts 12' from thld. Rwy 08 numbers located 216' from pavement end, Rwy 08-26 numbers smaller than standard, no centerline markings. ACTIVATE HIRL Rwy 08-26—CTAF. Med ints 5 clicks, high ints 7 clicks. See Special Notices—USAF 306 FTG Flight Training Areas, Vicinity of Colorado Springs and Pueblo Colorado.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE LAA.

LAMAR (H) VORW/DME 116.9 LAA Chan 116 N38°11.83' W102°41.25' 240° 27.5 NM to fld. 3944/12E.

WICHITA
L-10F

LEACH (See CENTER on page 220)

LEADVILLE

LAKE CO (LXV) 2 SW UTC-7(-6DT) N39°13.17' W106°18.99'

9934 B FUEL 100LL, JET A NOTAM FILE LXV

RWY 16-34: H6400X75 (ASPH) S-20, D-20 MIRL

RWY 16: PAPI(P2L)—GA 3.0° TCH 45'. Rgt tfc.

RWY 34: PAPI(P2L)—GA 3.0° TCH 45'.

AIRPORT REMARKS: Attended May-Oct 1430-2330Z†, Nov-Apr 1500-2330Z†. For svc after hrs call sheriff dispatch 719-486-1249. PPR for svc after hrs call 719-293-5110. Rwy 34 has +50' power lines 750' from right of thld. Twy C and old ramp have potholes and loose aggregate. All twys and new ramp area marked with blue and white reflectors. ACTIVATE MIRL Rwy 16-34 and PAPI Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: ASOS 118.375 (719) 486-2735.


COMMUNICATIONS: CTAF/UNICOM 122.8

DENVER CENTER APP/DEP CON 119.85

RADIO AIDS TO NAVIGATION: NOTAM FILE DEN.

RED TABLE (H) VORW/DME 113.0 DBL Chan 77 N39°26.36'
W106°53.68' 104° 30.0 NM to fld. 11800/12E.

DENVER
H-3F, 5A, L-9E
IAP

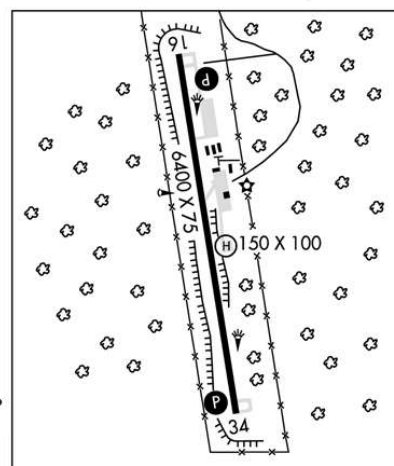

HELIPAD H1: H150X100 (ASPH-CONC)

HELIPORT REMARKS: Rwy H1 has 6-8 inch lip all around edges, concrete has longitudinal and corner cracking. Rwy H1 has 20' to 30' trees 130' east of pad.

Figure 226. Excerpt from Chart Supplement.

©ASA

DENVER, COLORADO

AL-5715 (FAA)

13262

LOC/DME I-APA 111.3 Chan 50	APP CRS 350°	Rwy Idg THRE 10001 Apt Elev 5885	35R 7000 5885	35L 5869 5885
---	------------------------	--	-----------------------------------	-----------------------------------


ILS or LOC RWY 35R

DENVER/ CENTENNIAL (APA)

⚠ Inoperative table does not apply to S-LOC 35R. When Rwy 35L VGSI inop, Sidestep to Rwy 35L NA at night. When Rwy 35L VGSI inop, Circling to Rwy 35L NA at night. ADF or DME required.

MALSR MISSED APPROACH: Climb to 7400 then climbing right turn to 9000 on I-APA south course to CASSE LOM/I-APA 8.1 DME and hold.

ATIS 120.3	DENVER APP CON 132.75 269.3	CENTENNIAL TOWER 118.9	GND CON 121.8	CLNC DEL 128.6
----------------------	---------------------------------------	----------------------------------	-------------------------	--------------------------

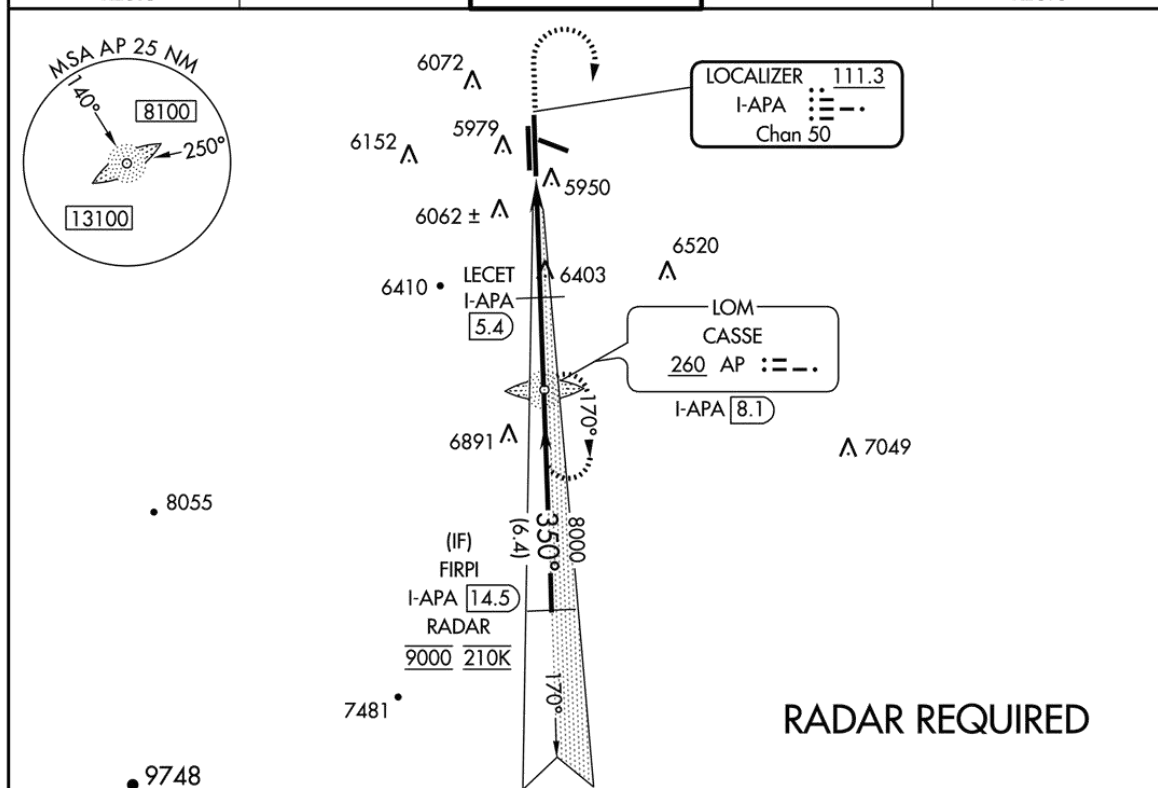

ELEV 5885	THRE 35R 5885 THRE 35L 5869	7400	9000	AP	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).	FIRPI I-APA 14.5 RADAR
MIRL all Rwy REIL Rwy 17R, 28, and 35L	TWR 5993	* LOC only	* I-APA S crs	LECET I-APA 5.4	LOM I-APA 8.1	9000
0.9% UP 1000 X 100	0.6% UP 4800 X 75	0.9% UP 7000 X 77	0.9% DOWN 1000 X 100	0.6% UP 4800 X 75	0.9% DOWN 1000 X 100	GS 3.00° TCH 53
35L	35R	35R	35R	35R	35R	35R
350° 6.3 NM from FAF	350° 6.3 NM from FAF	350° 6.3 NM from FAF	350° 6.3 NM from FAF	350° 6.3 NM from FAF	350° 6.3 NM from FAF	350° 6.3 NM from FAF
FAF to MAP 6.3 NM	FAF to MAP 6.3 NM	FAF to MAP 6.3 NM	FAF to MAP 6.3 NM	FAF to MAP 6.3 NM	FAF to MAP 6.3 NM	FAF to MAP 6.3 NM
Knots	60	90	120	150	180	
Min:Sec	6:18	4:12	3:09	2:31	2:06	

DENVER, COLORADO

Amdt 9A 07FEB13

39°34'N-104°51'W

DENVER/ CENTENNIAL (APA)

ILS or LOC RWY 35R


©ASA

Figure 227. ILS or LOC RWY 35R (APA).

ATLANTA, GEORGIA

AL-5932 (FAA)

13290

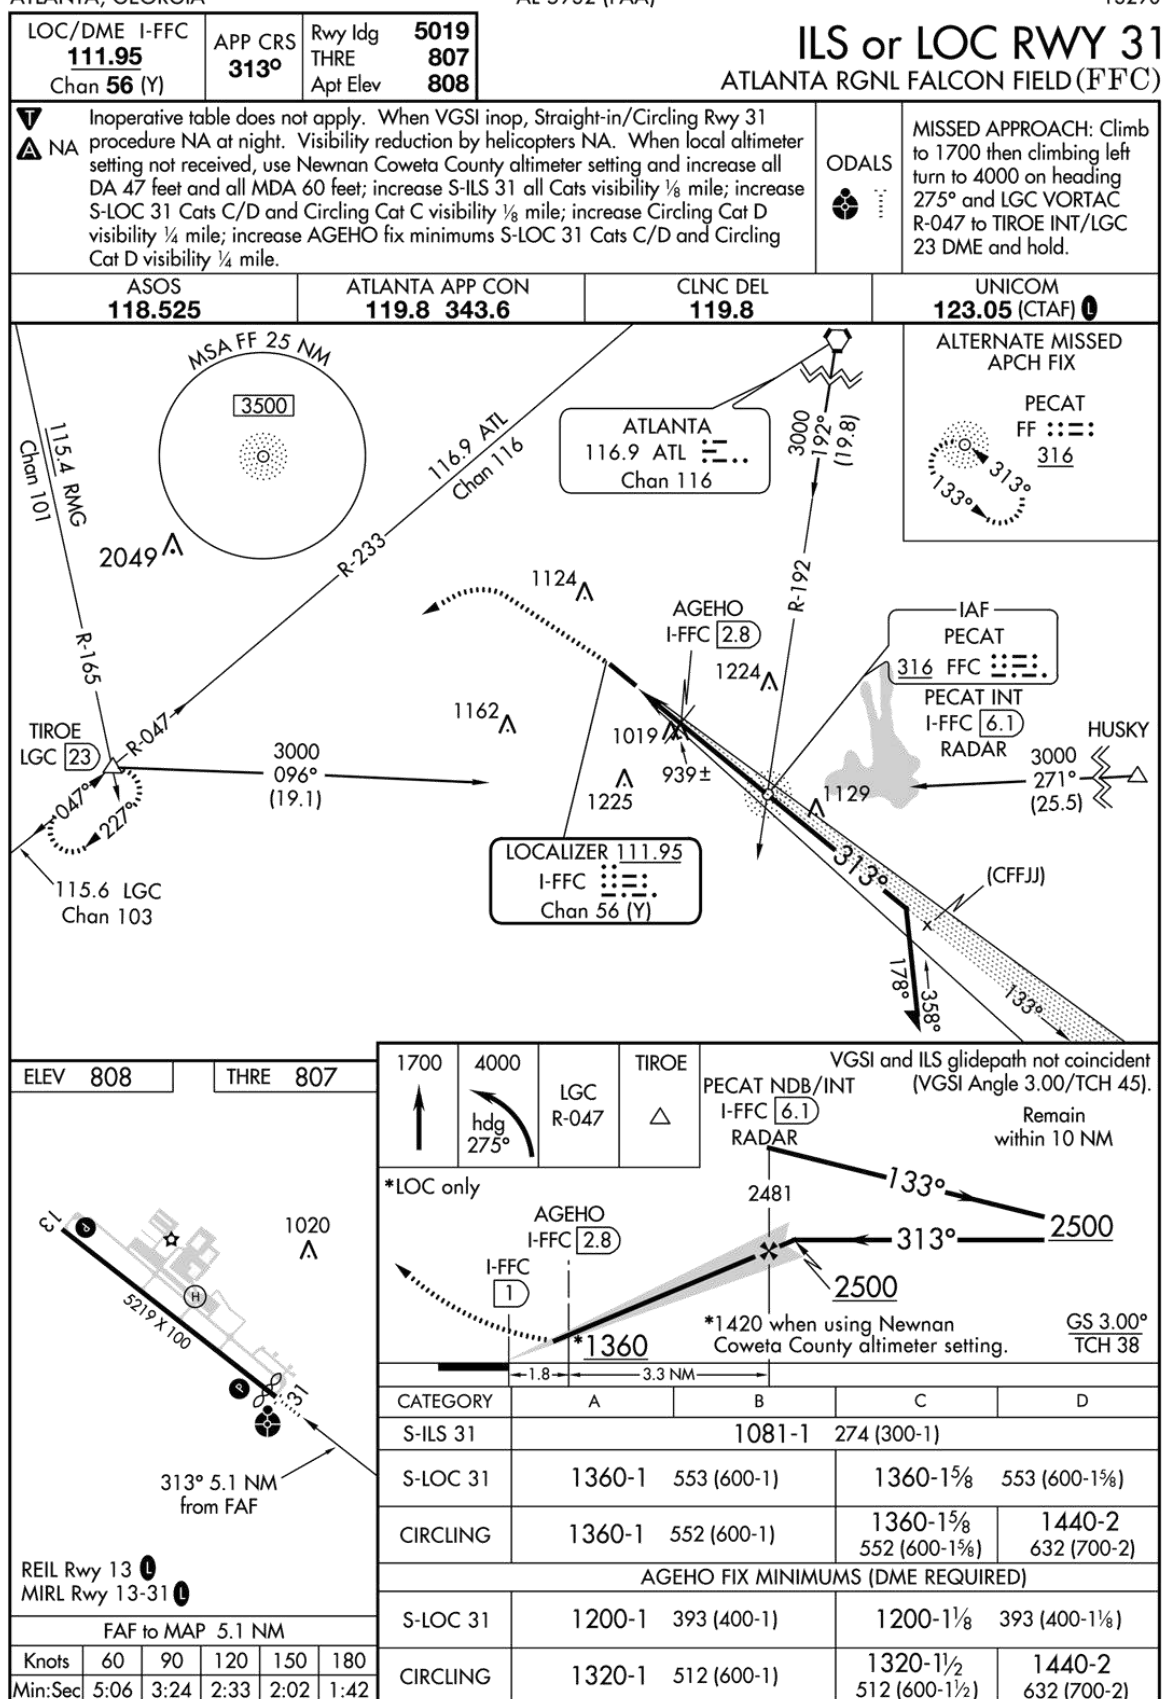

ATLANTA, GEORGIA

Amdt 2 15NOV12

33°21'N-84°34'W

ATLANTA RGNL FALCON FIELD (FFC)

ILS or LOC RWY 31


Figure 228. ILS or LOC RWY 31 (FFC).

©ASA

ATLANTA, GEORGIA

AL-5932 (FAA)

12320

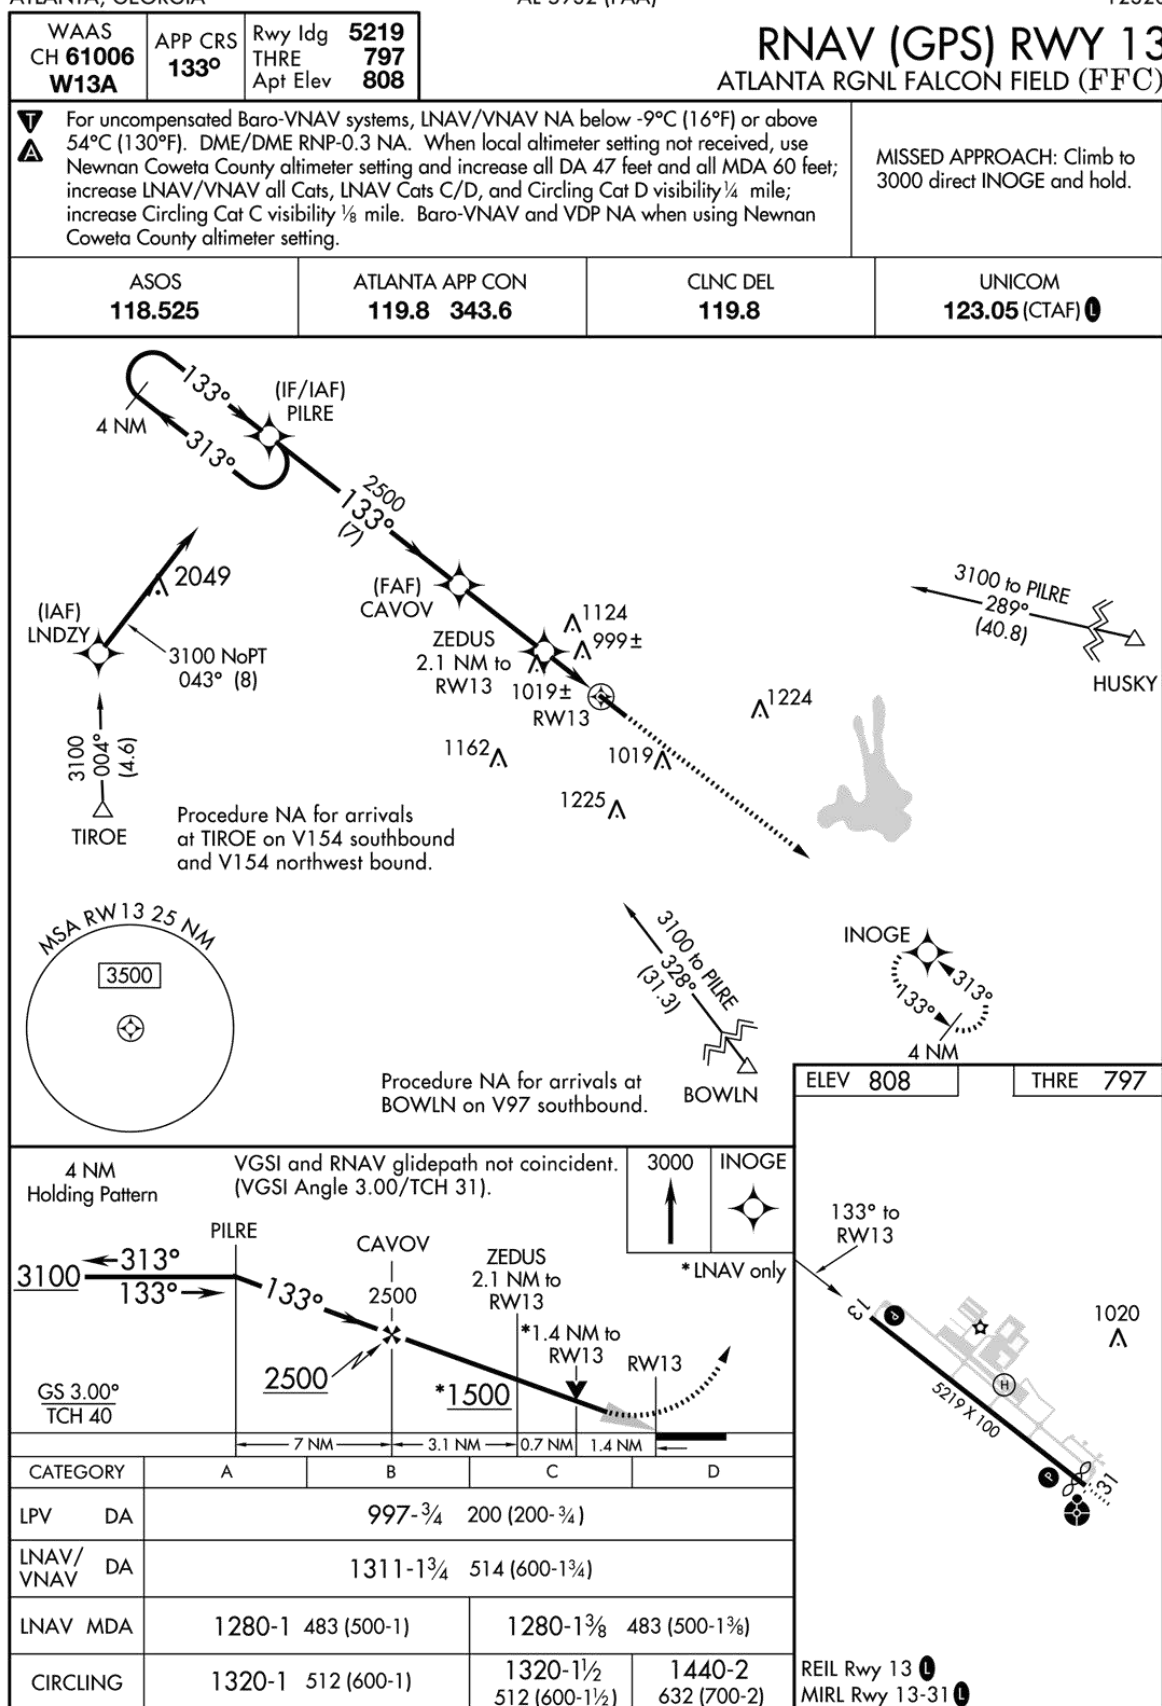

ATLANTA, GEORGIA

ATLANTA RGNL FALCON FIELD (FFC)

Amdt 2 15NOV12

33°21'N-84°34'W

RNAV (GPS) RWY 13

Figure 229. RNAV (GPS) RWY 13 (FFC).

©ASA

AL-6787 (FAA)

VOR/DME or GPS-A
BALDWIN MUNI (7D3)

MISSED APPROACH: Climb to 2600, then left turn via the HIC VOR/DME R-345 to HOPPR/14 DME and hold.

CTAF
122.9



©ASA

130

MICHIGAN

BALDWIN MUNI (7D3) 2 S UTC-5(-4DT) N43°52.53' W85°50.53'

CHICAGO

828 TPA—1828(1000) NOTAM FILE LAN

L-281

RWY 09-27: H3800X75 (ASPH) S-10 0.3% up E

IAP

RWY 09: Trees.

RWY 27: Trees.

RWY 05-23: 2800X100 (TURF)

RWY 05: Thld displcd 800'. Trees.

RWY 23: Thld displcd 800'. Trees.

AIRPORT REMARKS: Unattended. Deer on and invof arpt. Arpt CLOSED Nov thru Apr; no snow removal. Arpt manager cell 231-250-2551. Rwy 09-27 sfc considerable pavement cracking with vegetation growing through cracks. Rwy 05-23 and displcd thlds marked with 3' yellow cones.

COMMUNICATIONS: CTAF 122.9

® MINNEAPOLIS CENTER APP/DEP CON 120.85

RADIO AIDS TO NAVIGATION: NOTAM FILE LAN.

WHITE CLOUD (L) VOR/DME 117.6 HIC Chan 123 N43°34.49'


W85°42.97' 344° 18.9 NM to fld. 920/1W.

VOR/DME unusable:

020°-090° byd 30 NM blo 3,000'

DME portion unusable:

270°-290° byd 35 NM blo 3,000'

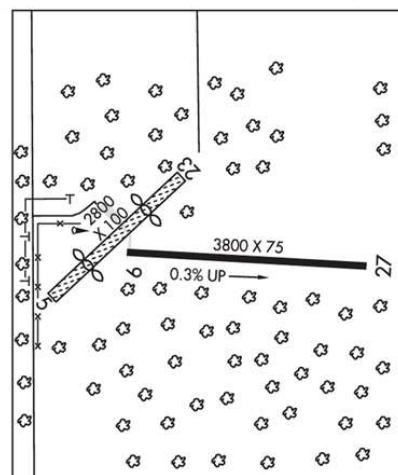

BANGU N45°00.88' W84°48.49' NOTAM FILE GLR.

LAKE HURON

NDB (LOM) 375 GL 097° 4.5 NM to Gaylord Rgnl. Unmonitored.

BANNISTER

SHADY LAWN FLD (4M4) 2 E UTC-5(-4DT) N43°07.72' W84°22.88'

CHICAGO

680 TPA—1680(1000) NOTAM FILE LAN

RWY 09-27: 1850X50 (TURF) LIRL

RWY 09: Bldg.

RWY 27: Trees.

AIRPORT REMARKS: Attended irregularly. Ultralight and AG activity on and invof arpt. Deer and birds on and invof arpt. Crops adjacent to rwy during summer months. NSTD LIRL color and configuration, by prior arrangement. Rwy 09 and Rwy 27 marked by 3' yellow cones.

COMMUNICATIONS: CTAF 122.9

BARAGA (2P4) 4 W UTC-5(-4DT) N46°47.10' W88°34.67'

GREEN BAY

845 TPA—1845(1000) NOTAM FILE GRB

RWY 09-27: 2200X100 (TURF)

RWY 09: Trees.

RWY 27: Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED Nov-Apr except to ski equipped acft. 25' p-line 850' from thld Rwy 27. Deer and birds on and invof arpt.

COMMUNICATIONS: CTAF 122.9

BATH

UNIVERSITY AIRPARK (41G) 2 NW UTC-5(-4DT) N42°50.42' W84°28.75'

DETROIT

856 B S2 NOTAM FILE LAN

RWY 08-26: 1988X100 (TURF) LIRL

RWY 08: Trees.

RWY 26: Tree.

AIRPORT REMARKS: Attended irregularly. Rwy 08-26 occasionally soft/wet areas E end during spring thaw and after heavy rain. ACTIVATE LIRL Rwy 08-26 and NSTD rotating bcn—122.85. NSTD flashing strobe and alternating white/red bcn. Rwy 08-26 marked with 3' yellow cones.

COMMUNICATIONS: CTAF 122.9

BATOL N42°21.72' W85°11.07' NOTAM FILE BTL.

CHICAGO

NDB (MHW/LOM) 272 BT 225° 4.4 NM to W K Kellogg.

L-281

Figure 231. Excerpt from Chart Supplement.

©ASA

DUNCAN, OKLAHOMA

AL-5140 (FAA)

10266

LOC I-DUC 111.5	APP CRS 352°	Rwy Idg TDZE Apt Elev	6326 1094 1114
---------------------------	------------------------	-----------------------------	---



LOC RWY 35 DUNCAN/ HALLIBURTON FIELD (DUC)



Visibility reduction by helicopters NA. When local altimeter setting not received, use Henry Post AAF (Fort Sill) altimeter setting and increase all MDA 80 feet and visibility S-35 Cat C/D ¼ mile and Circling Cat D ¼ mile.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct DUC VOR/DME and hold.

AWOS-3 119.075	FORT SILL APP CON 118.6 290.375	CLNC DEL 118.4	UNICOM 122.8 (CTAF) 0
--------------------------	---	--------------------------	---------------------------------

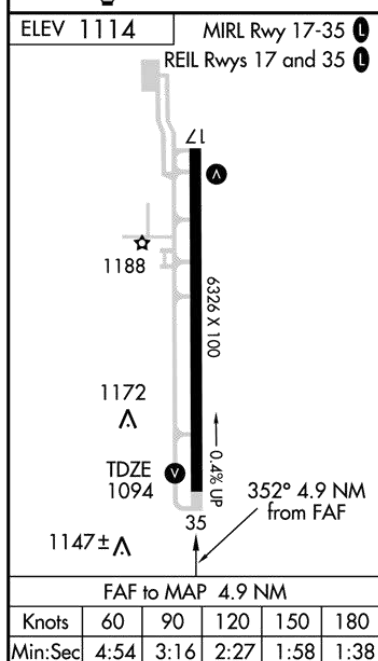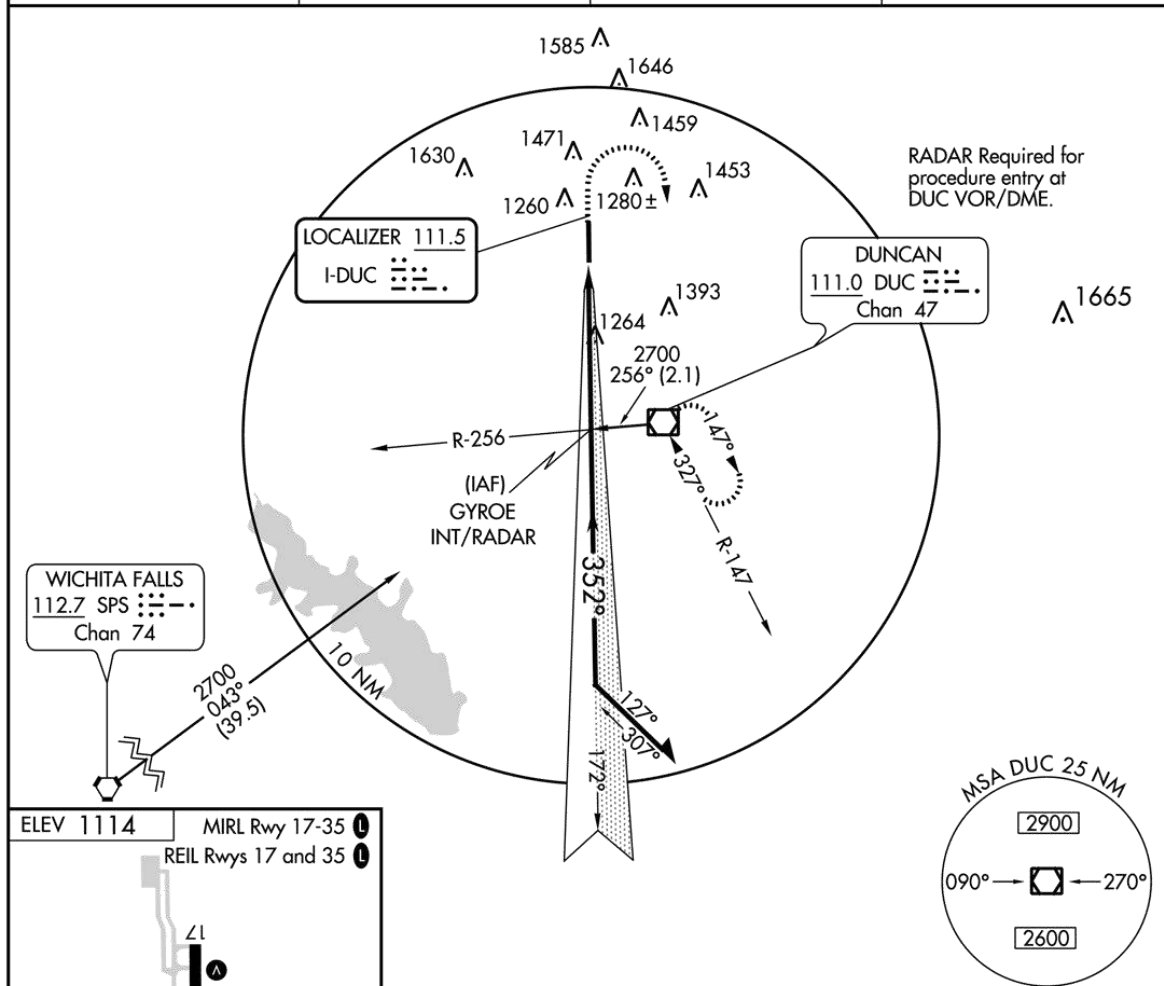

2000	3000	DUC	GYROE INT RADAR	Remain within 10 NM
172°	352°	2700	2700	3.04° TCH 42
4.9 NM				
CATEGORY	A	B	C	D
S-35	1520-1	426 (500-1)	1520-1½	426 (500-1½)
CIRCLING	1560-1	1580-1	1580-1½	1840-2¼
	446 (500-1)	466 (500-1)	466 (500-1½)	726 (800-2¼)

DUNCAN, OKLAHOMA
Amdt 5 23SEP10

34°28'N - 97°58'W

LOC RWY 35 DUNCAN/ HALLIBURTON FIELD (DUC)

Figure 232. LOC RWY (DUC).

©ASA

10266

RNAV (GPS) RWY 17

DUNCAN/ HALLIBURTON FIELD (DUC)

MISSED APPROACH:
Climb to 3000 direct
JEGMO and on track
140° to DUC VOR/DME
and hold.

1820
3000
082°
(5)

(IF) CEPAC

3000
262°
(5)

(IAF) BECAR

(IAF) ACUDI

3000
053°
(20.1)

LAWTON
LAW

Radar Required for
procedure entry at
LAW VOR/DME.

MSA RW 17 25 NM

3000

1585
172°
(6.1)

(FAF) DOCTA

1646

1459

1280 ±

1453

1471

1260

RW17

JEGMO

1393

140°

DUNCAN
DUC

147°

327°

4 NM


3000
302°
(43.9)

ARDMORE
ADM

Procedure NA for arrival on
ADM VORTAC
airway radials 321 CW 337.

ELEV 1114

172° to
RW17

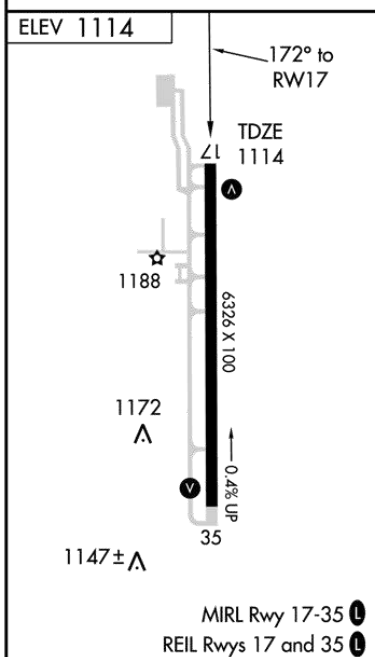

3000 ↑	JEGMO ✱	tr 140°	DUC ◻	Procedure Turn NA	
* LNAV only		TEPCO 2.7 NM to RW17	DOCTA 2800	CEPAC	3000
RW17		* 1.9 NM to RW17	2020*	172°	2800
1.9		0.8	2.4 NM	6.1 NM	GS 3.00° TCH 53
CATEGORY	A	B	C	D	
LPV DA	1390-1 276 (300-1)				
LNAV/ VNAV DA	1903-2 ¾ 789 (800-2¾)				
LNAV MDA	1780-1	666 (700-1)	1780-1¾ 666 (700-1¾)	1780-2 666 (700-2)	
CIRCLING	1780-1	666 (700-1)	1780-1¾ 666 (700-1¾)	1840-2¼ 726 (800-2¼)	

DUNCAN/HALLIBURTON FIELD (DUC)
RNAV (GPS) RWY 17
©ASA

Figure 233. RNAV (GPS) RWY 17 (DUC).

LINCOLN, NEBRASKA

AL-232 (FAA)

13066

LOC I-OCZ 111.1	APP CRS 174°	Rwy Idg THRE Apt Elev	12901 1195 1219
---------------------------	------------------------	-----------------------------	--

ILS or LOC RWY 18





LINCOLN (LNK)

▼ *RVR 1800 authorized with the use of FD or AP or HUD to DA. When local altimeter setting not received use Beatrice altimeter setting and increase all DA 91 feet and all MDA 100 feet, increase S-LOC 18 Cat C/D/E visibility to 1½, Circling Cat C visibility to 2 and Cat D visibility to 2¼; increase ROROC fix minimums S-LOC 18 Cat C/D/E visibility to 1¾ Circling Cat C visibility to 1¾ and Cat D visibility to 2¼. For inoperative MALSR, increase S-ILS 18 Cat E visibility to RVR 4000, S-LOC 18 Cat E visibility to 1¾, and ROROC fix minimums S-LOC 18 Cat E visibility to 1½. For inoperative MALSR when using Beatrice altimeter setting, increase S-ILS 18 all Cats visibility to RVR 4500, S-LOC 18 Cat E visibility to 2, and ROROC fix minimums S-LOC 18 Cat C/D/E visibility to 1¾.



MISSED APPROACH:
Climb to 1700 then climbing right turn to 3000 direct LNK VORTAC and hold.

ATIS 118.05 290.9	LINCOLN APP CON 124.0 270.3	LINCOLN TOWER★ 118.5(CTAF) 253.5	GND CON 121.9 275.8	CLNC DEL 120.7 225.4	UNICOM 122.95
-----------------------------	---------------------------------------	--	-------------------------------	--------------------------------	-------------------------

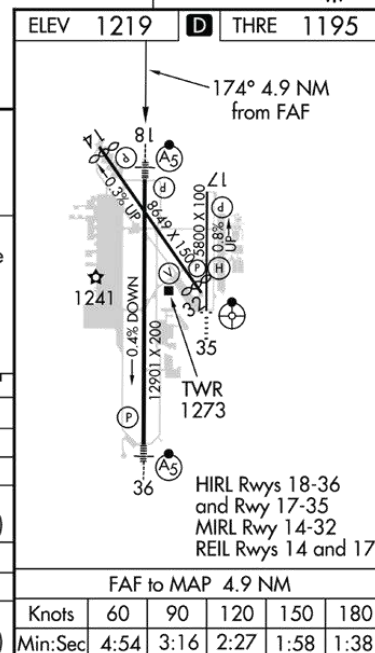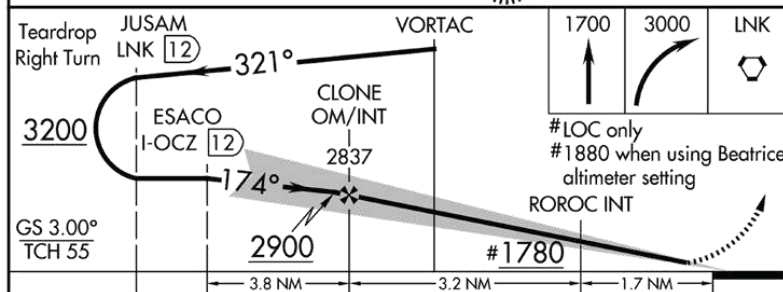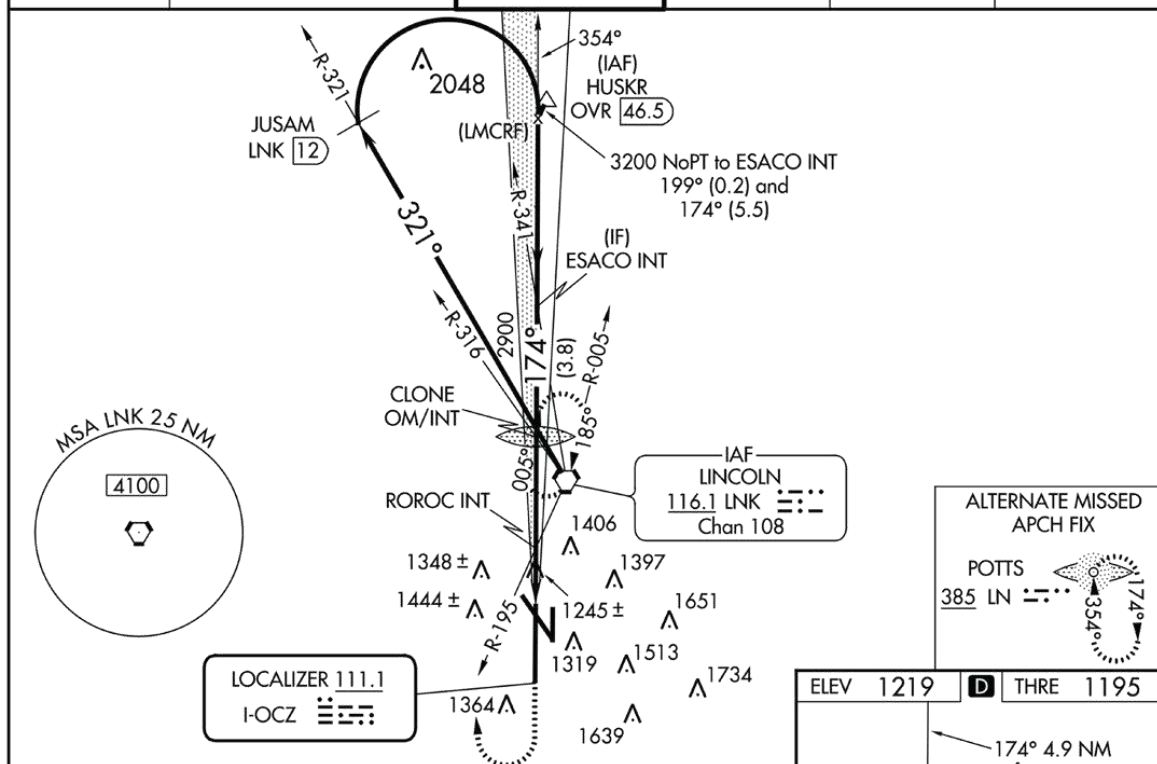

CATEGORY	A	B	C	D	E
S-ILS 18					
S-LOC 18	1780/24	585 (600-½)	1780-1¼	585 (600-1¼)	
CIRCLING	1780-1	561 (600-1)	1780-1¾	1820-2	2040-3
	501 (600-1)	541 (600-1)	561 (600-1½)	601 (700-2)	821 (900-3)
ROROC FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)					
S-LOC 18	1720/24	525 (600-½)	1720/55	525 (600-1¼)	
CIRCLING	1720-1	1760-1	1760-1½	1820-2	2040-3
	501 (600-1)	541 (600-1)	541 (600-1½)	601 (700-2)	821 (900-3)

LINCOLN, NEBRASKA
Amdt 7 05APR12

40°51'N-96°46'W

ILS or LOC RWY 18



LINCOLN (LNK)

©ASA


13066

RNAV (GPS) RWY 32
LINCOLN (LNK)

MISSED APPROACH:
Climb to 3200 direct
ZUBTO and hold.

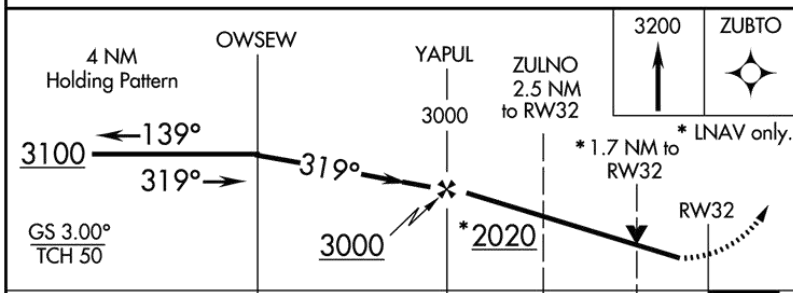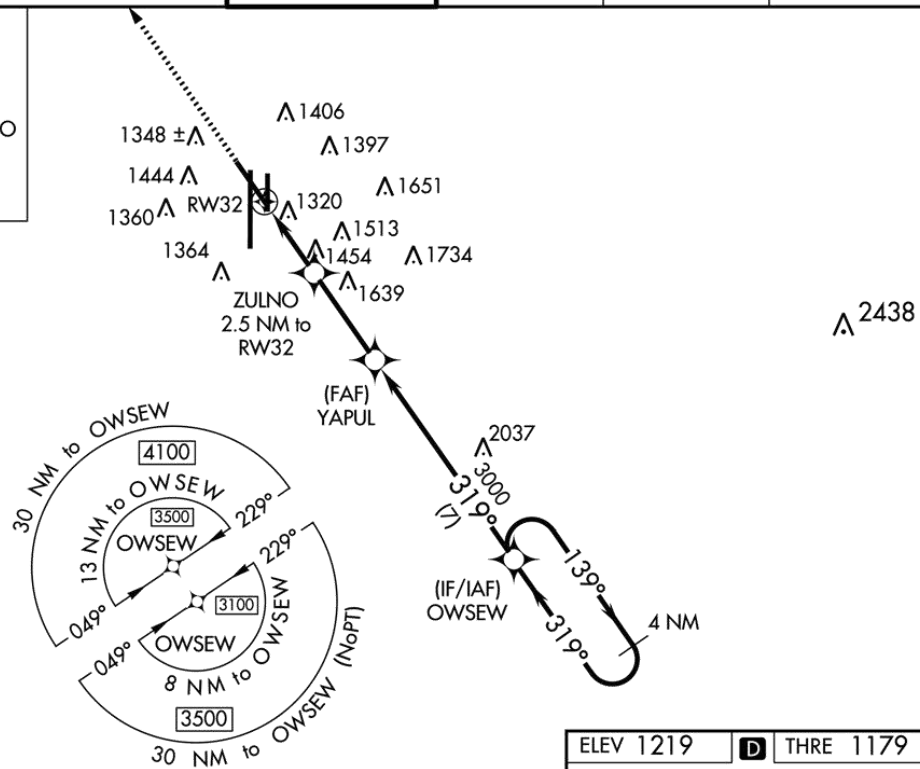

		7 NM		3.1 NM		0.8 NM		1.7			
CATEGORY		A		B		C		D			
LPV	DA	1429-1 250 (300-1)									
LNAV/ VNAV	DA	1563-1¼ 384 (400-1¼)									
LNAV	MDA	1760-1 581 (600-1)					1760-1¾ 581 (600-1¾)				
CIRCLING		1760-1 541 (600-1)					1760-1¾ 541 (600-1¾)		1820-2 601 (700-2)		

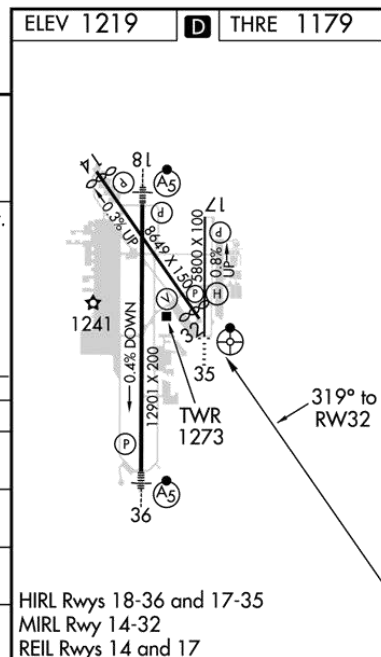

LINCOLN (LNK)

RNAV (GPS) RWY 32

©ASA

Figure 235. RNAV (GPS) RWY 32 (LNK).

DOTHAN, ALABAMA

AL-123 (FAA)

13178

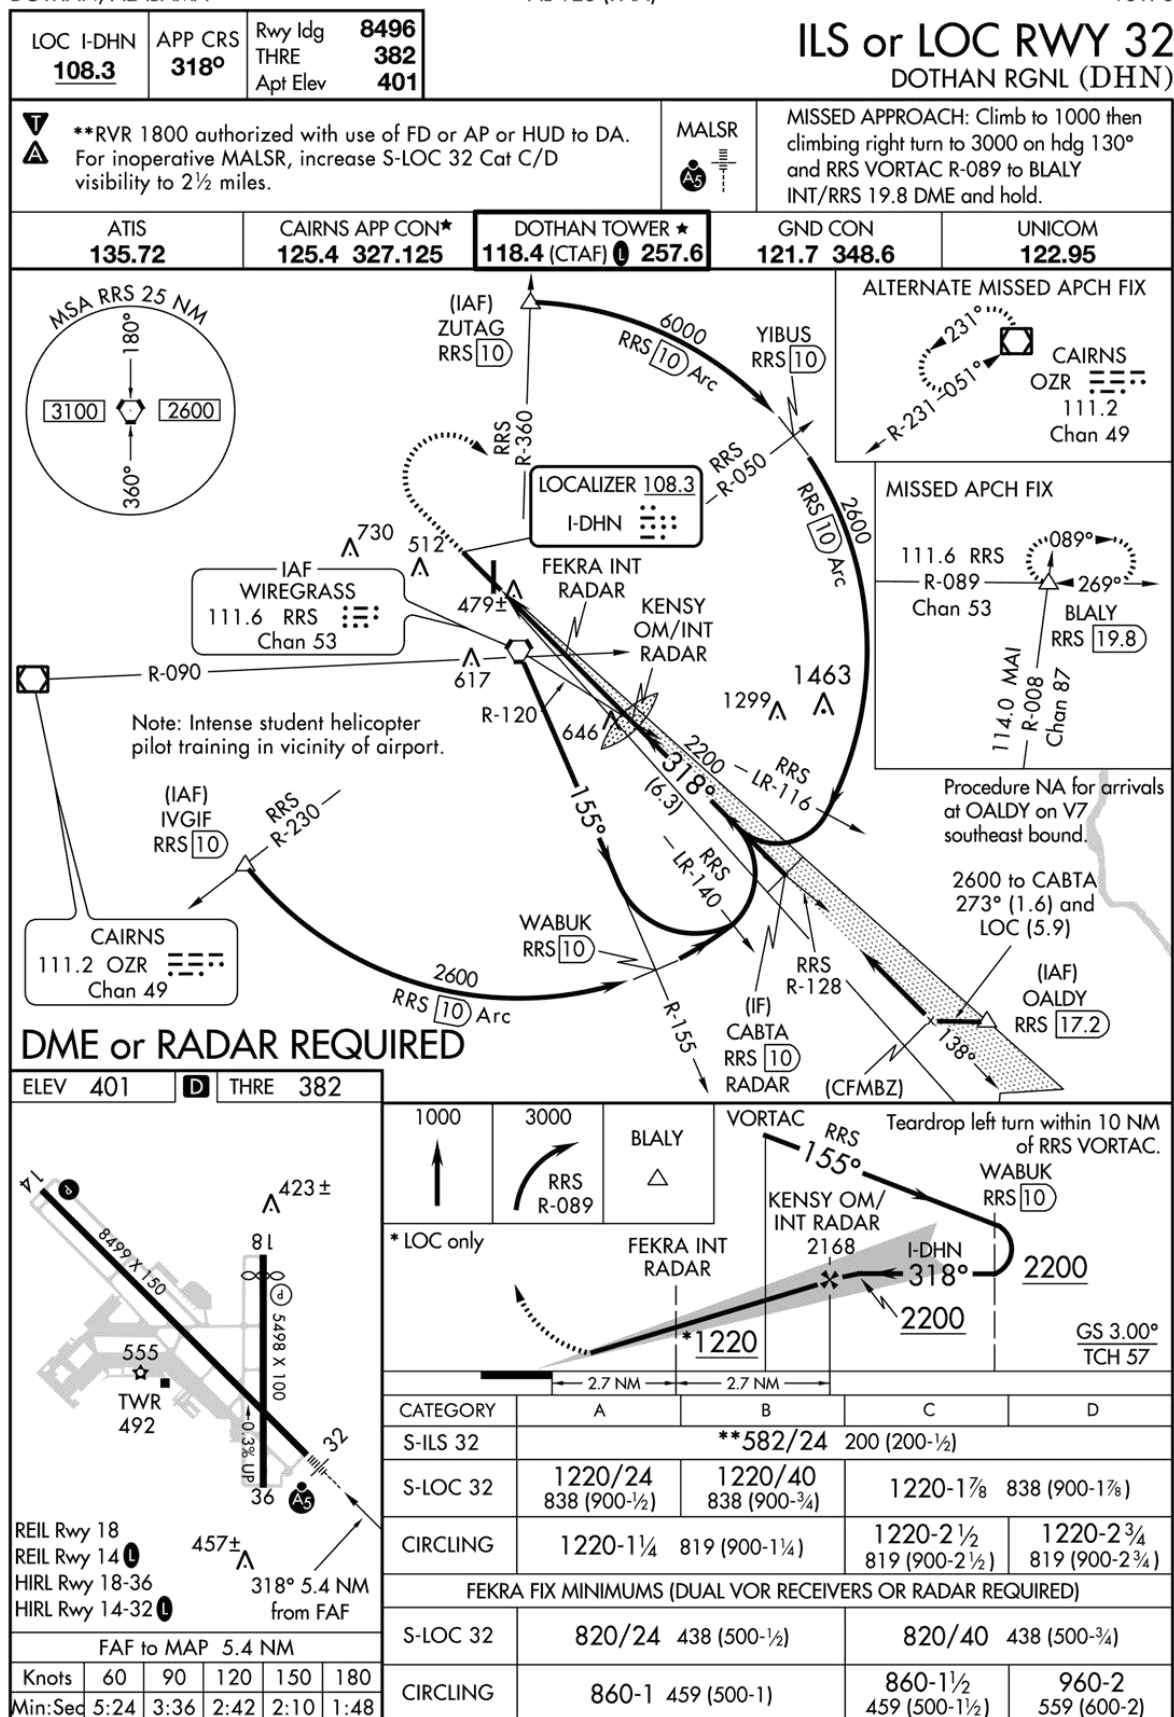


Figure 236. ILS or RWY 32 (DHN).

©ASA

LANCASTER, OHIO

AL-6212 (FAA)

WAAS CH 97701 W10A	APP CRS 100°	Rwy Idg TDZE Apt Elev	5004 857 868
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 10

LANCASTER/FAIRFIELD COUNTY (LHQ)


Baro-VNAV NA when using Rickenbacker Intl altimeter setting. DME/DME RNP-0.3 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Visibility reduction by helicopters NA. When local altimeter setting not received, use Rickenbacker Intl altimeter setting and increase all DAs 48 feet, and all MDAs 60 feet, and increase LPV, LNAV/VNAV all Cats and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 2800 direct DIPAC and hold.

ASOS 118.375	COLUMBUS APP CON 119.15 279.6	CLNC DEL 121.65	UNICOM 122.725 (CTAF) 0
------------------------	---	---------------------------	-----------------------------------

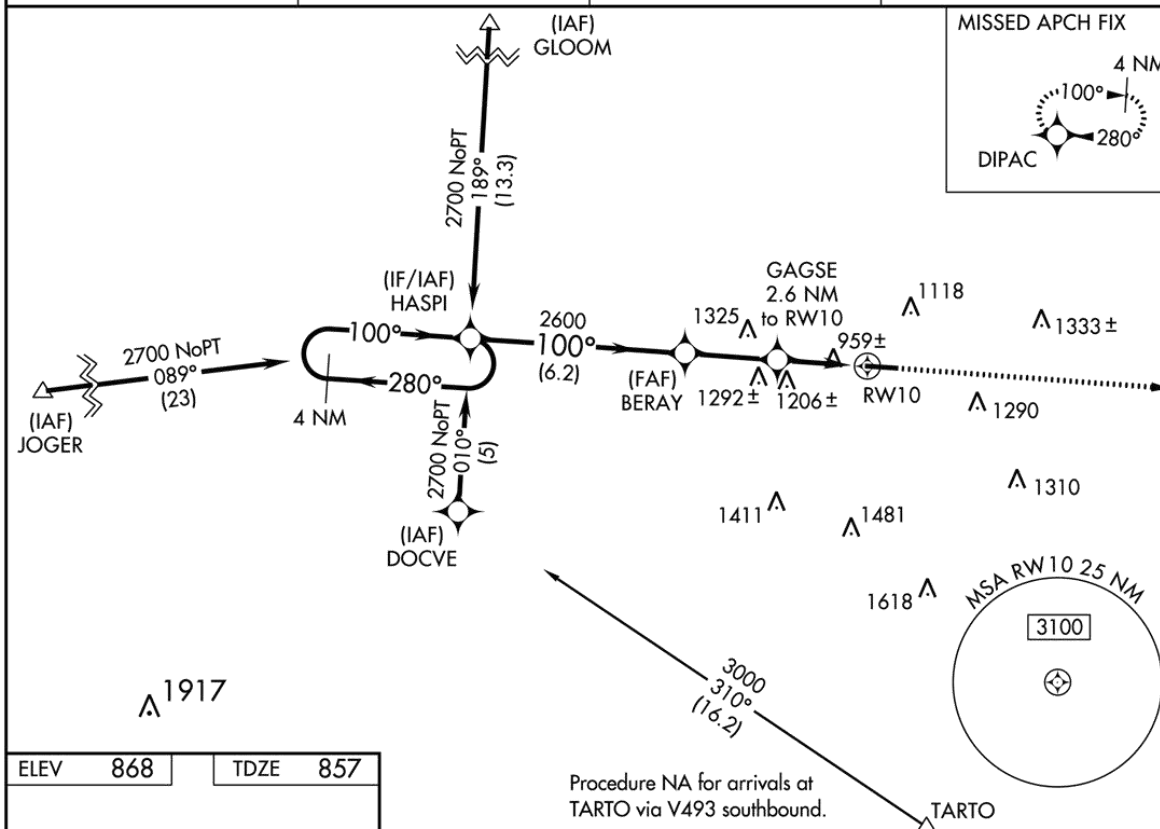

ELEV	868	TDZE	857
------	------------	------	------------

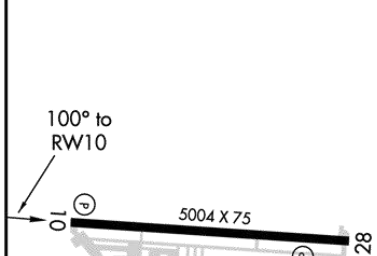

REIL Rwy 10 and 28 **L**
HIRL Rwy 10-28 **L**

CATEGORY		A	B	C	D
LPV	DA	1170-1	313 (400-1)		NA
LNAV/VNAV	DA	1291-1 ½	434 (500-1 ½)		NA
LNAV	MDA	1460-1	603 (600-1)	1460-1 ¾ 603 (600-1 ¾)	NA
CIRCLING		1520-1 652 (700-1)	1540-1 672 (700-1)	1560-2 692 (700-2)	NA

LANCASTER, OHIO

Orig 13010

39°45'N-82°39'W

RNAV (GPS) RWY 10

LANCASTER/FAIRFIELD COUNTY (LHQ)
©ASA

Figure 237. RNAV (GPS) RWY 10 (LHQ).

LANCASTER, OHIO

AL-6212 (FAA)

13010

WAAS CH 69628 W28A	APP CRS 280°	Rwy Idg THRE Apt Elev	5004 868 868
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28




LANCASTER/FAIRFIELD COUNTY (LHQ)

▼ Baro-VNAV NA when using Rickenbacker Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
▲ Visibility reduction by helicopters NA. VDP NA with Rickenbacker Intl altimeter setting. When local altimeter setting not received, use Rickenbacker Intl altimeter setting and increase all DA 48 feet; increase all MDA 60 feet.


MISSED APPROACH:
Climb to 2700 direct HASPI and hold.

ASOS 118.375	COLUMBUS APP CON 119.15 279.6	CLNC DEL 121.65	UNICOM 122.725 (CTAF) 0
------------------------	---	---------------------------	-----------------------------------

MISSED APCH FIX

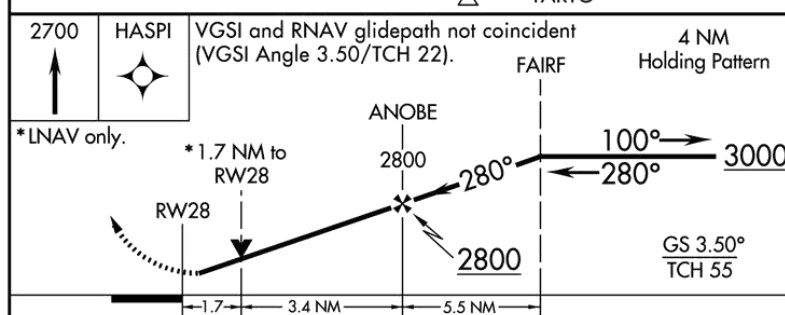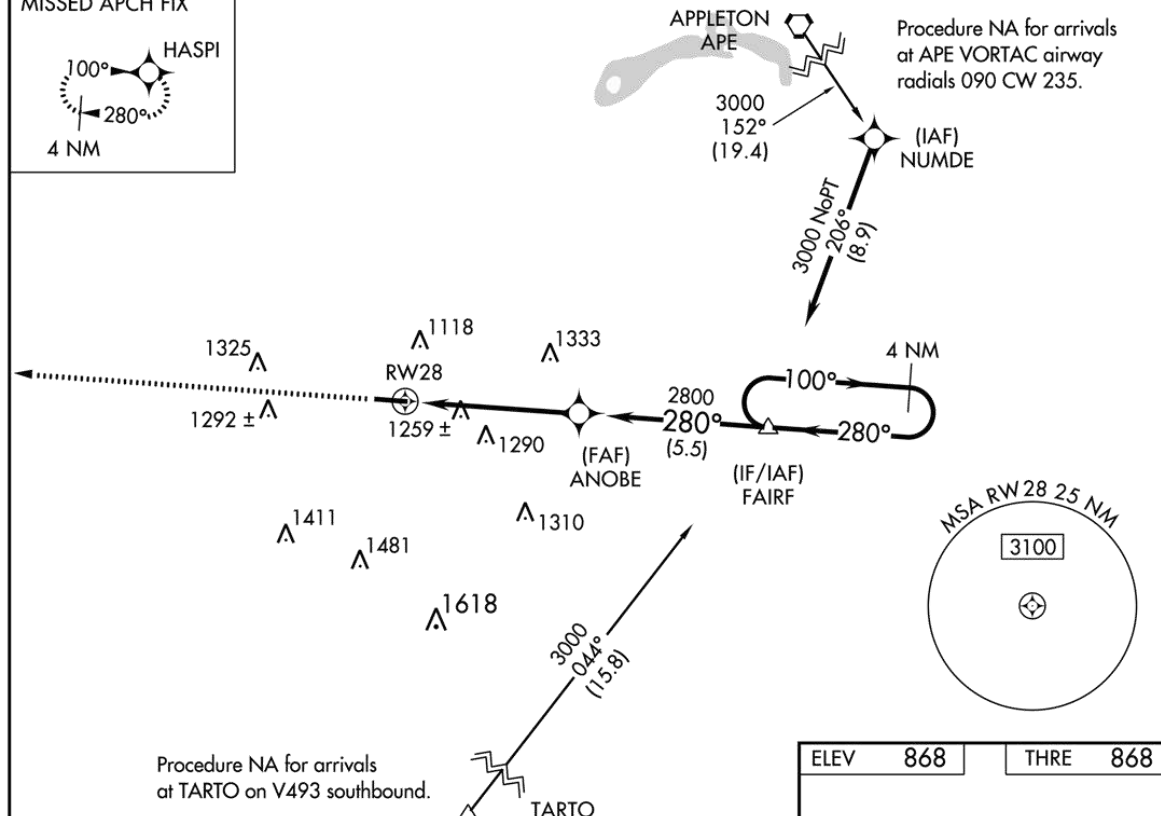

CATEGORY	A	B	C	D
LPV DA	1068-3/4	200 (200-3/4)		NA
LNAV/VNAV DA	1641-2 1/2	773 (800-2 1/2)		NA
LNAV MDA	1520-1	652 (700-1)		NA
CIRCLING	1520-1 652 (700-1)	1540-1 672 (700-1)		NA

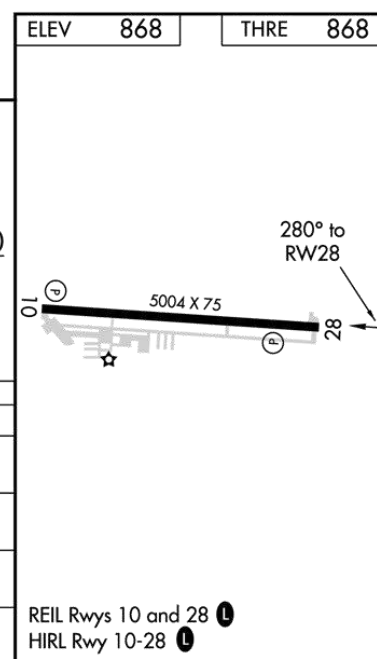

LANCASTER, OHIO

Amdt 1 15NOV12

39°45'N-82°39'W

RNAV (GPS) RWY 28

LANCASTER/FAIRFIELD COUNTY (LHQ)


Figure 238. RNAV (GPS) RWY 28 (LHQ).

©ASA

LANCASTER, OHIO

AL-6212 (FAA)

13122

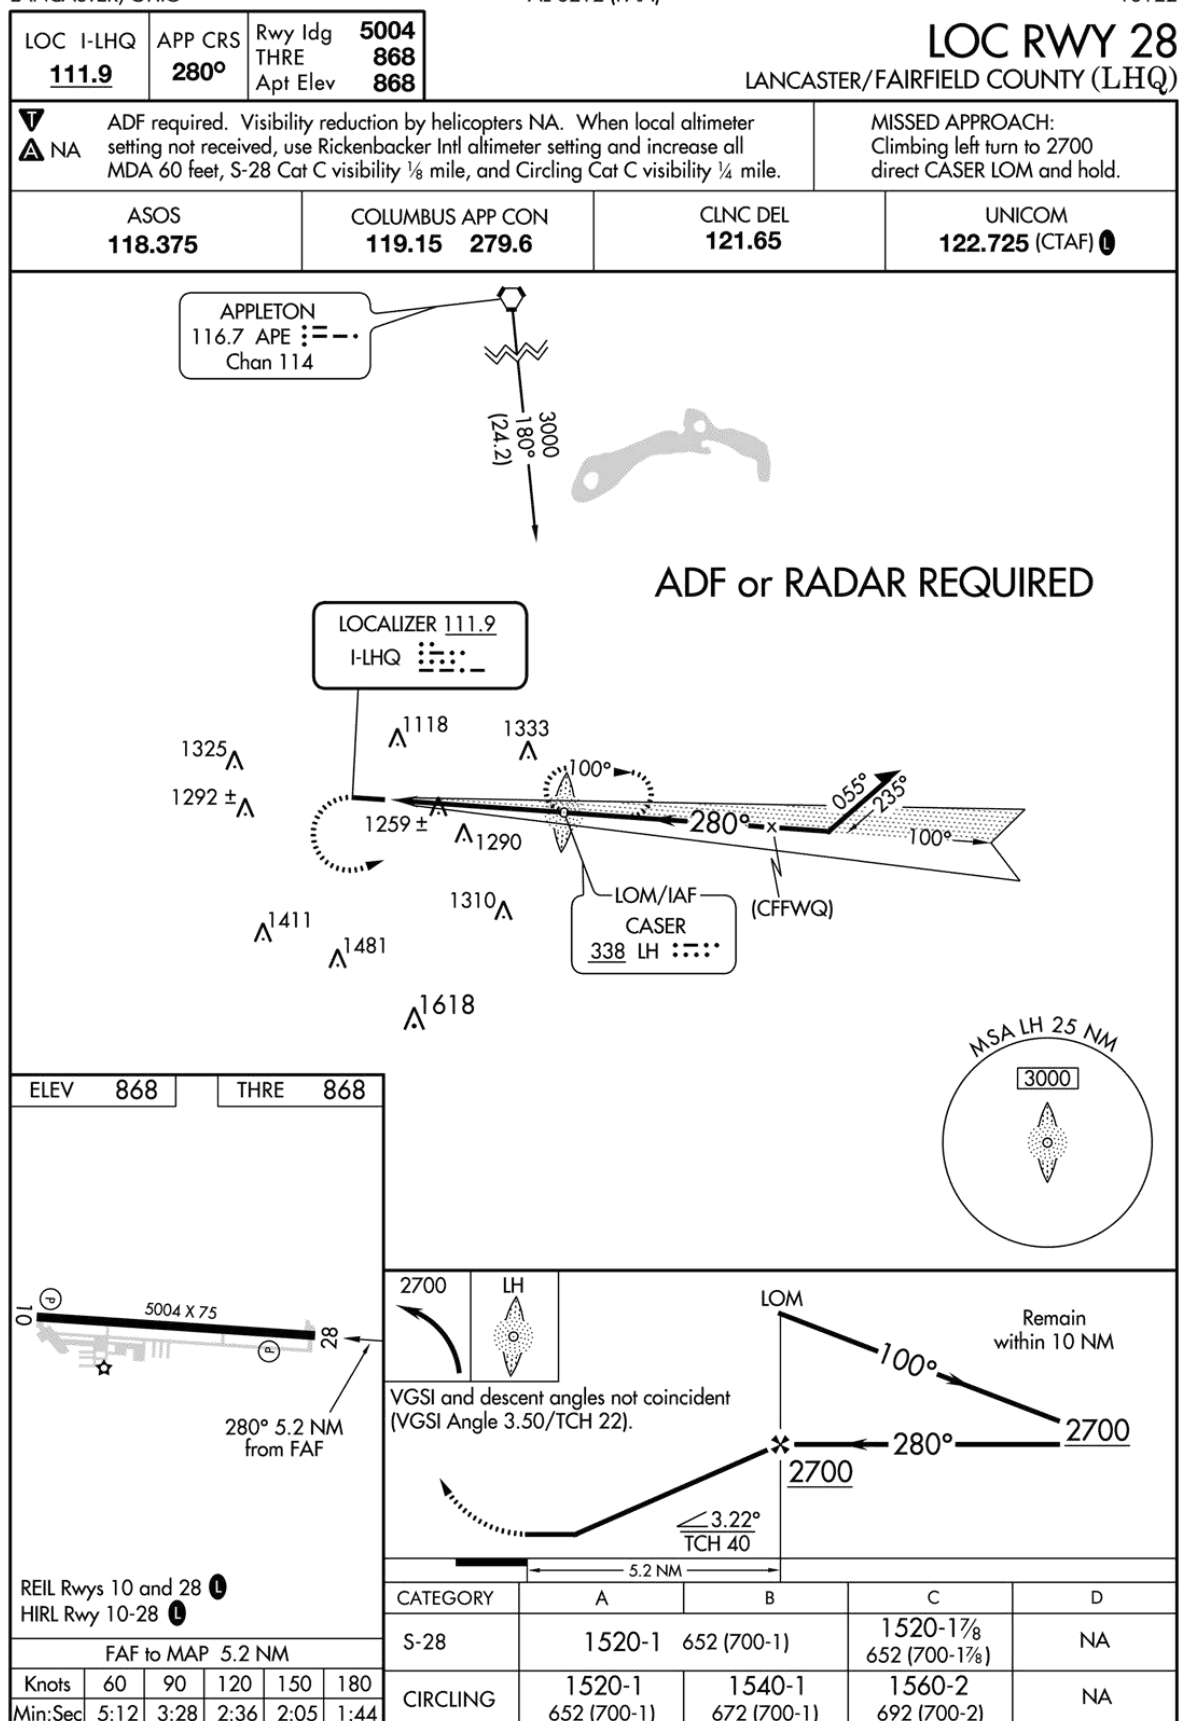

LANCASTER, OHIO

Amdt 2 15NOV12

39°45'N-82°39'W

LANCASTER/FAIRFIELD COUNTY (LHQ)

LOC RWY 28

©ASA

PRICE, UTAH

AL-681 (FAA)


VOR/DME PUC 115.5 Chan 102	APP CRS 009°	Rwy Idg TDZE Apt Elev 8313 5835 5953
--	------------------------	--

VOR/DME RWY 36


PRICE/CARBON COUNTY RGNL/BUCK DAVIS FIELD (PUC)

⚠ ⚠ Circling NA at night to Rwy 18, 25, and 32.	MALSF A2	MISSED APPROACH: Climbing right turn to 10000 via heading 200° and PUC VOR/DME R-164 to FOSOV/12 DME and hold.
--	---------------------------	---

ASOS 135.425	SALT LAKE CENTER 133.9 370.85	UNICOM 122.8 (CTAF) 1
-------------------------------	--	--

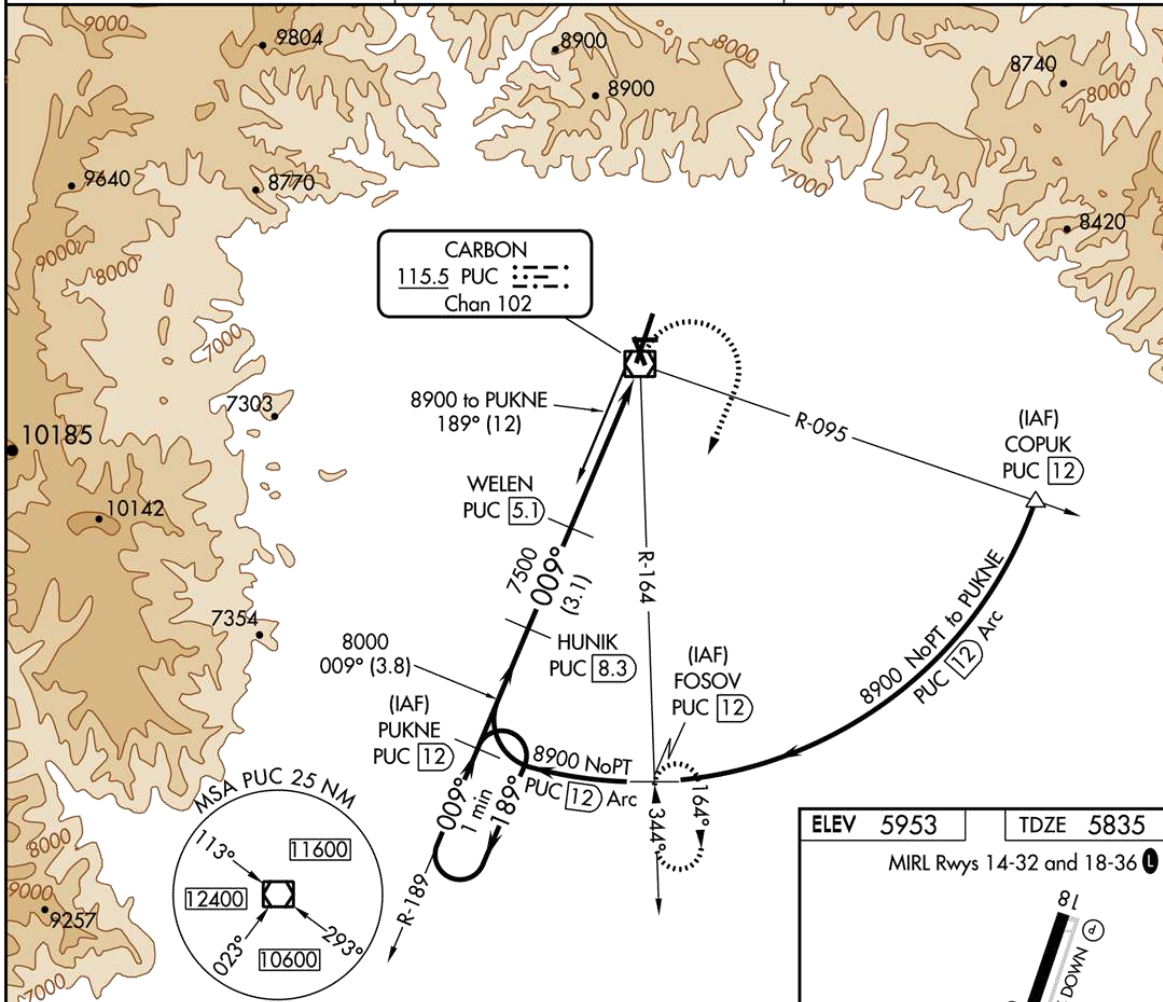

One Minute Holding Pattern	PUKNE PUC 12	HUNIK PUC 8.3	WELEN PUC 5.1	10000 PUC R-164	FOSOV PUC 12
8900 ← 189°	009° →	009° →	3.00° TCH 47	VOR/DME	
VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 52).					
	8000	7500			
	3.8 NM	3.1 NM	3.7 NM	1.5	
CATEGORY	A	B	C	D	
S-36	6240-1	405 (300-1)	6240-1¼	405 (300-1¼)	
CIRCLING	6660-1 707 (800-1)	6740-1¼ 787 (800-1¼)	6820-2½ 867 (900-2½)	6980-3 1027 (1100-3)	

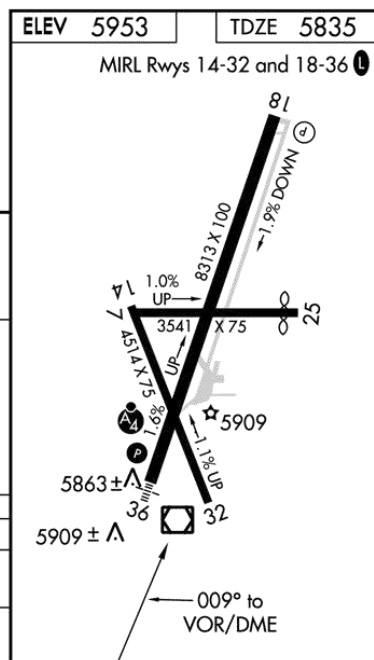

PRICE, UTAH
Orig 12320

PRICE/CARBON COUNTY RGNL/BUCK DAVIS FIELD (PUC)
39°37'N-110°45'W

VOR/DME RWY 36

©ASA

Figure 240. VOR/DME RWY 36 (PUC).

PRICE, UTAH

AL-681 (FAA)



12320

WAAS CH 53425 W36A	APP CRS 004°	Rwy Idg THRE 5812 Apt Elev 5957
--	------------------------	---

RNAV (GPS) RWY 36

PRICE/CARBON COUNTY RGNL/BUCK DAVIS FIELD (PUC)

⚠ Circling to Rwy 25 NA at night. DME/DME RNP-0.3 NA.	MALSF A4	MISSED APPROACH: Climbing right turn to 8900 direct WOKUP and hold.
ASOS 135.425	SALT LAKE CENTER 133.9 370.85	UNICOM 122.8 (CTAF) 0

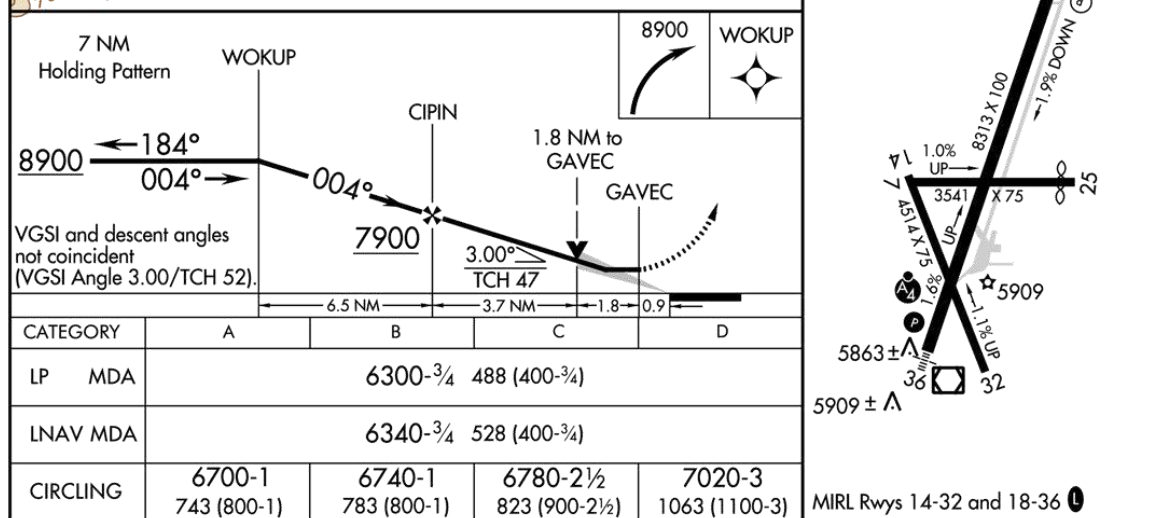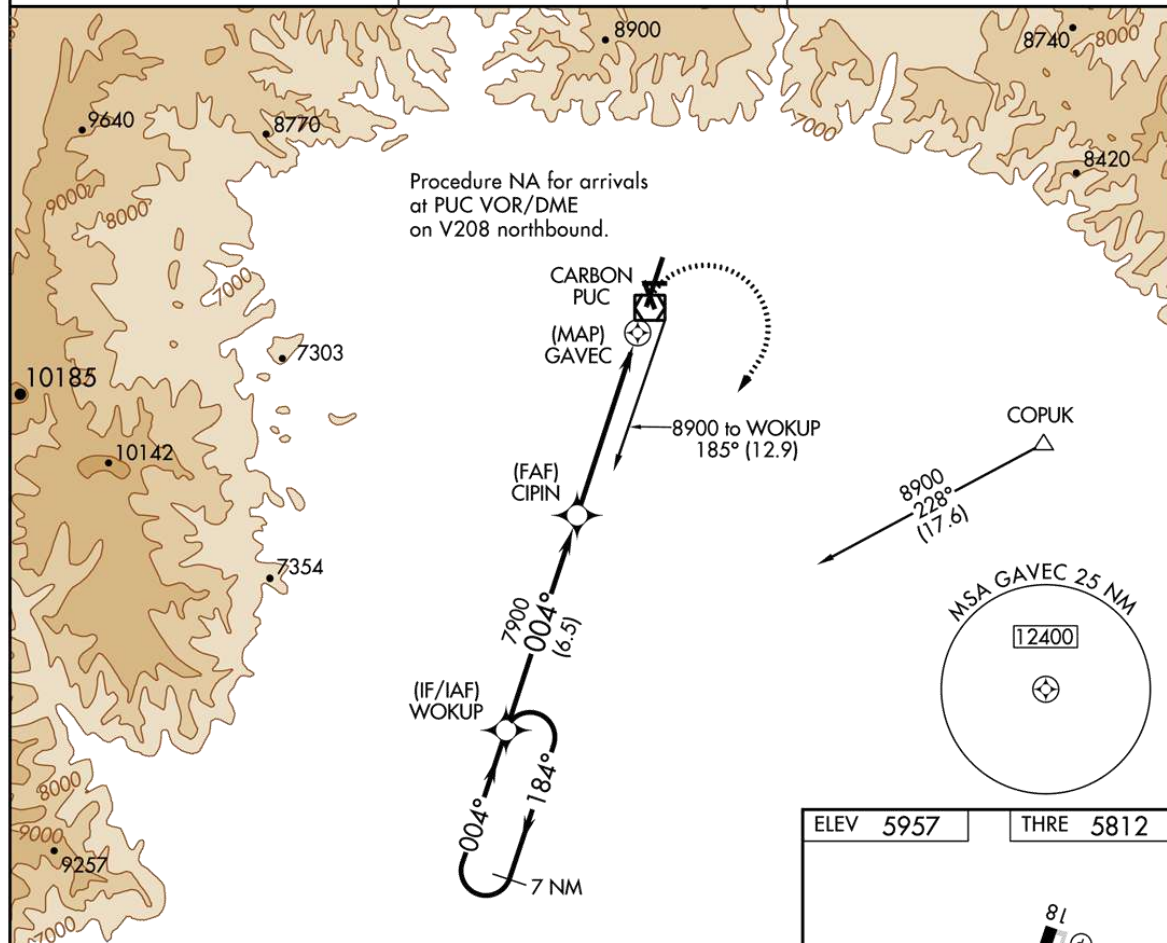

PRICE, UTAH

PRICE/CARBON COUNTY RGNL/BUCK DAVIS FIELD (PUC)

Amdt 1 25AUG11

39°37'N-110°45'W

Figure 241. RNAV (GPS) RWY 36 (PUC).

RNAV (GPS) RWY 36
©ASA

LITTLE ROCK, ARKANSAS

AL-233 (FAA)

12320

APP CRS	Rwy Idg	6124
360°	THRE	253
	Apt Elev	266


LITTLE ROCK/
BILL AND HILLARY CLINTON NATIONAL/ADAMS FIELD (LIT)

RNAV (GPS) RWY 36

▼ DME/DME RNP 0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Stuttgart altimeters setting and increase all MDA 100 feet. Increase LNAV Cat C/D and Circling Cat C visibility ¼ mile.
ASR

MISSED APPROACH: Climbing right turn to 2700 direct HIGHS and hold.

ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 291.775 353.6	118.7 257.8	121.9 339.8	118.95

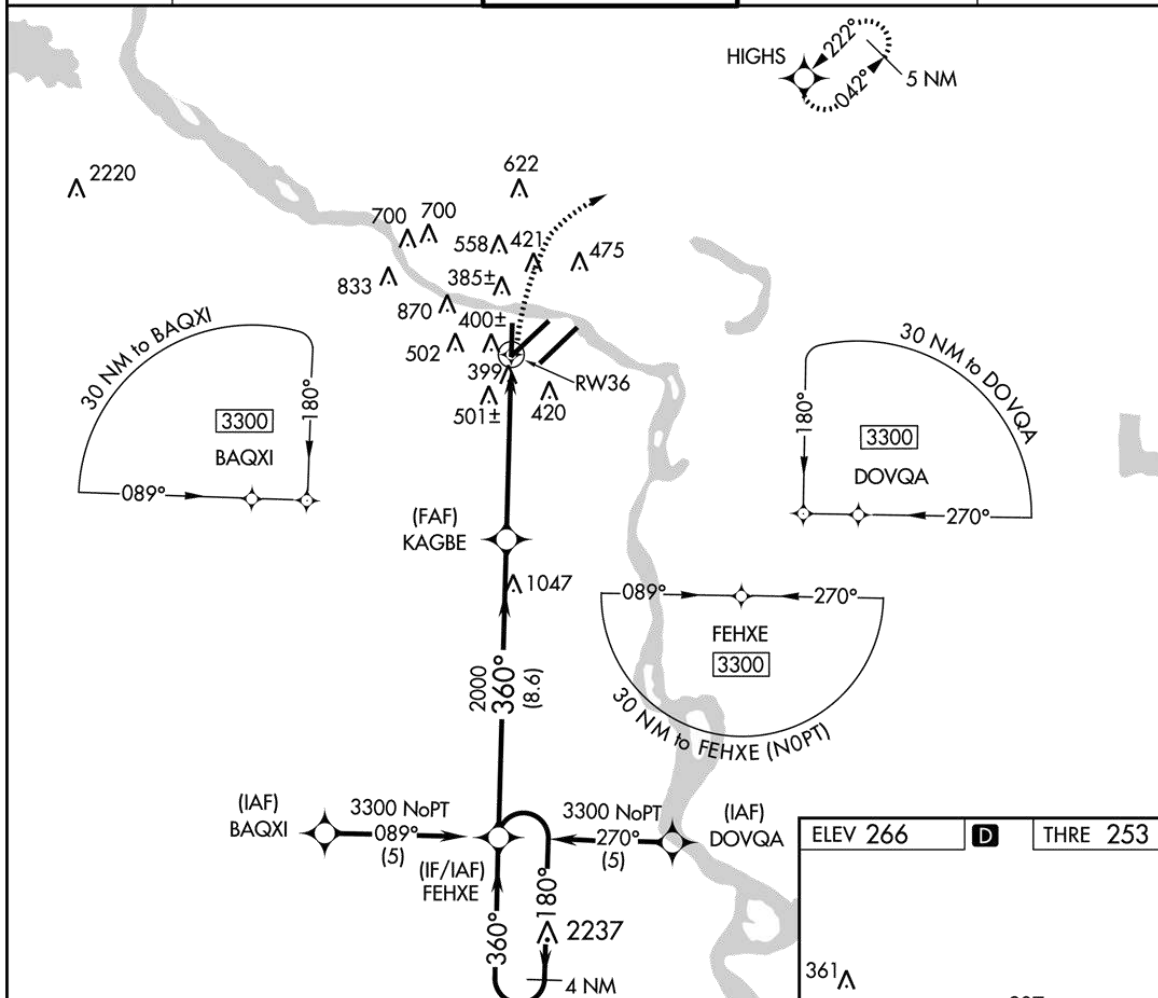

4 NM Holding Pattern

VGSI and descent angle not coincident (VGSI Angle 4.00/TCH 64).

2700

HIGHS

FEHXE

3300

180°

360°

360°

KAGBE

2000

3.00°

TCH 50

RW36

8.6 NM

5.3 NM

CATEGORY	A	B	C	D
LNAV MDA	760-1	507 (500-1)	760-1½	507 (500-1½)
CIRCLING	800-1	534 (600-1)	940-2 674 (700-1)	1180-3 914 (1000-3)

307

22R

81

415

296

36

8224 X 150

8273 X 150

8251 X 150

TWR 416

4R

322

360° to RW36


TDZ/CL Rwy 22R

HIRL Rws 4R-22L, 4L-22R and 18-36

LITTLE ROCK, ARKANSAS
Orig-A 10MAR11

LITTLE ROCK/ BILL AND HILLARY CLINTON NATIONAL/ADAMS FIELD (LIT)
34°44'N - 92°13'W

RNAV (GPS) RWY 36
©ASA



ROANOKE, VIRGINIA

AL-349 (FAA)

12096


LOC/DME I-SZK 111.1 Chan 48	APP CRS 072°	Rwy Idg THRE 1152 Apt Elev 1175
--	------------------------	---

LDA RWY 6


ROANOKE RGNL/WOODRUM FIELD (ROA)

▼ Inoperative table does not apply to S-LDA 6. Circling NA NW of Rwy 6-24. Circling NA to Rwy 16. SKIRT minimums: For inoperative MALSR, increase S-LDA 6 Cats A and B visibility to 1½ and Cats C and D visibility to 1¾.	MALSR 	MISSED APPROACH: Climb to 1820 then climbing right turn to 5000 on heading 189° and ROA VORTAC R-149 to JEXOV INT/ROA 22 DME and hold.
--	---	--

ATIS 132.375	ROANOKE APP CON 126.9 339.8	ROANOKE TOWER 118.3 257.8	GND CON 121.9 257.8	CLNC DEL 119.7
------------------------	---------------------------------------	-------------------------------------	-------------------------------	--------------------------

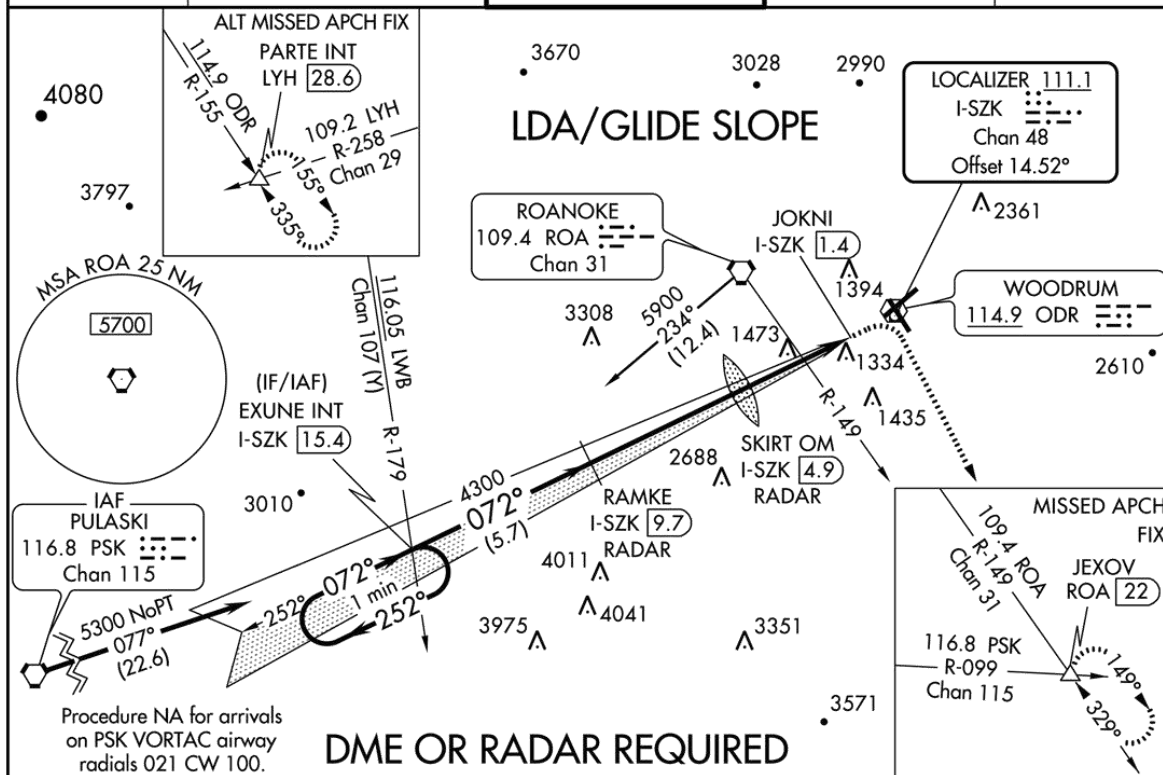

One Minute Holding Pattern		1820 ↑		5000 hdg 189°		ROA R-149	JEXOV △	ELEV 1175	D	THRE 1152
GS 3.00° TCH 55		EXUNE INT I-SZK 15.4		RAMKE I-SZK 9.7 RADAR		SKIRT OM I-SZK 4.9 RADAR		JOKNI I-SZK 1.4		
5300 ← 252° 072° →		072°		4300		2671		* LOC only.		
VGSI and LDA glidepath not coincident (VGSI Angle 3.00/TCH 58).		4300		* 2720		JOKNI				
		5.7 NM		4.8 NM		3.5		1.2		
CATEGORY	A	B	C	D						
S-LDA/GS 6	1605-1		453 (500-1)							
S-LDA 6	2720-1½	1568 (1600-1½)	2720-3		1568 (1600-3)					
CIRCLING	2720-1½	1545 (1600-1½)	2720-3		1545 (1600-3)					
SKIRT OM/DME/RADAR MINIMUMS										
S-LDA 6	1780-1	628 (700-1)	1780-1¾		628 (700-1¾)					
CIRCLING	1780-1½	605 (700-1½)	1780-2		605 (700-2)					

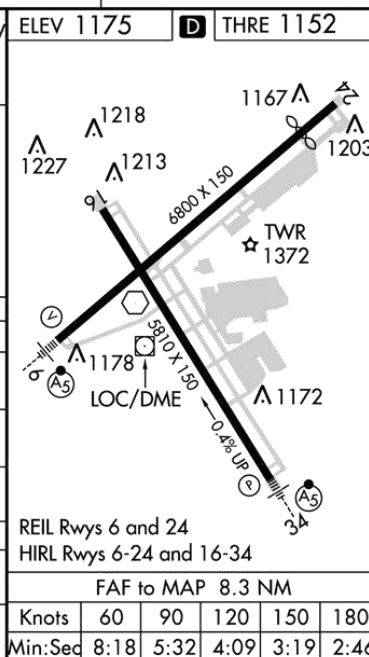

ROANOKE, VIRGINIA

ROANOKE RGNL/WOODRUM FIELD (ROA)

Amdt 11 12JAN12

37°20'N-79°59'W

LDA RWY 6

©ASA

Figure 244. LDA RWY 6 (ROA).

CHATHAM, MASSACHUSETTS

AL-5247 (FAA)



11293

APP CRS	Rwy Idg	N/A
240°	TDZE	N/A
	Apt Elev	63

RNAV (GPS)-B
CHATHAM MUNI (CQX)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hyannis altimeter setting and increase all MDA 40 feet.	MISSED APPROACH: Climbing left turn to 3000 direct CEPUL and hold.
---	--

ASOS 135.875	CAPE APP CON ★ 118.2	CLNC DEL 127.3	UNICOM 122.8 (CTAF)	122.95 0
------------------------	--------------------------------	--------------------------	-------------------------------	------------------------

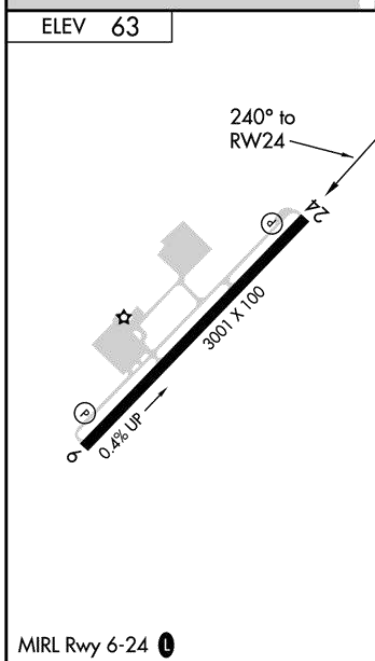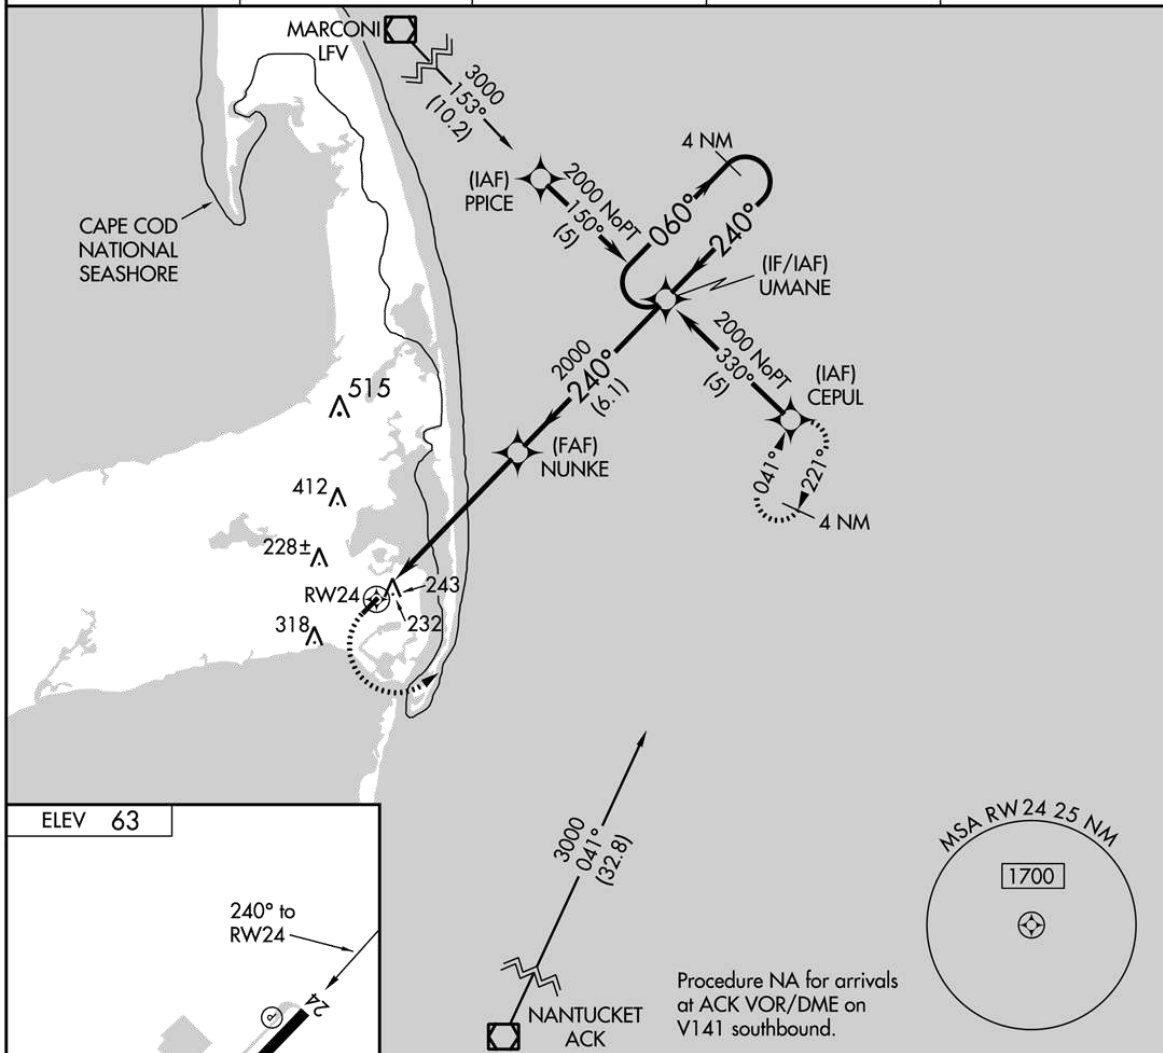

3000	CEPUL	VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 45).		4 NM Holding Pattern
NUNKE		UMANE	060° → 2000 ← 240°	
RW24		≤ 3.05° TCH 39	5.9 NM	
CATEGORY		A	B	C
CIRCLING		600-1	537 (600-1)	680-1¾ 617 (700-1¾)
				D
				680-2 617 (700-2)

CHATHAM, MASSACHUSETTS

Orig-A 26AUG10

41°41'N - 69°59'W


CHATHAM MUNI (CQX)
RNAV (GPS)-B
©ASA

Figure 245. RNAV (GPS)-B (CQX).

RIVERSIDE, CALIFORNIA

AL-769 (FAA)

13234

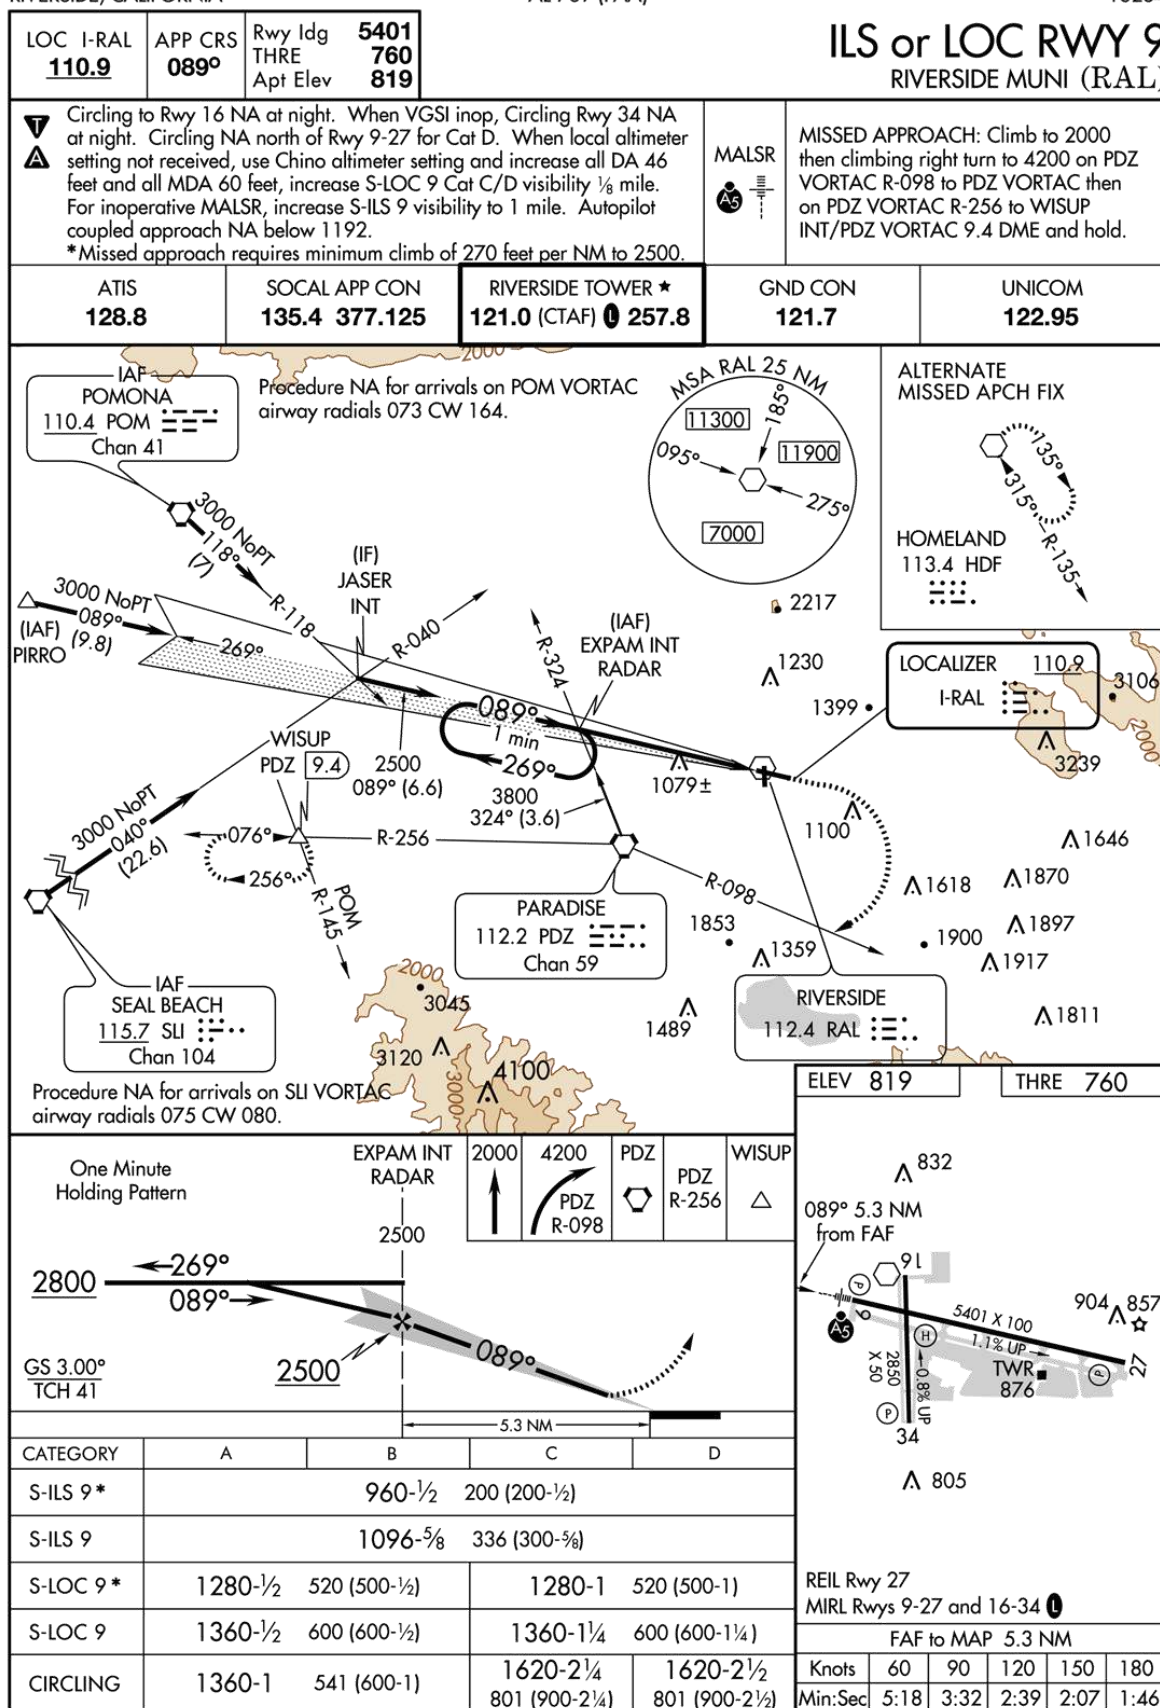

RIVERSIDE, CALIFORNIA

Amdt 8A 22AUG13

33°57'N-117°27'W


RIVERSIDE MUNI (RAL)

ILS or LOC RWY 9

©ASA

RIVERSIDE, CALIFORNIA

AL-769 (FAA)

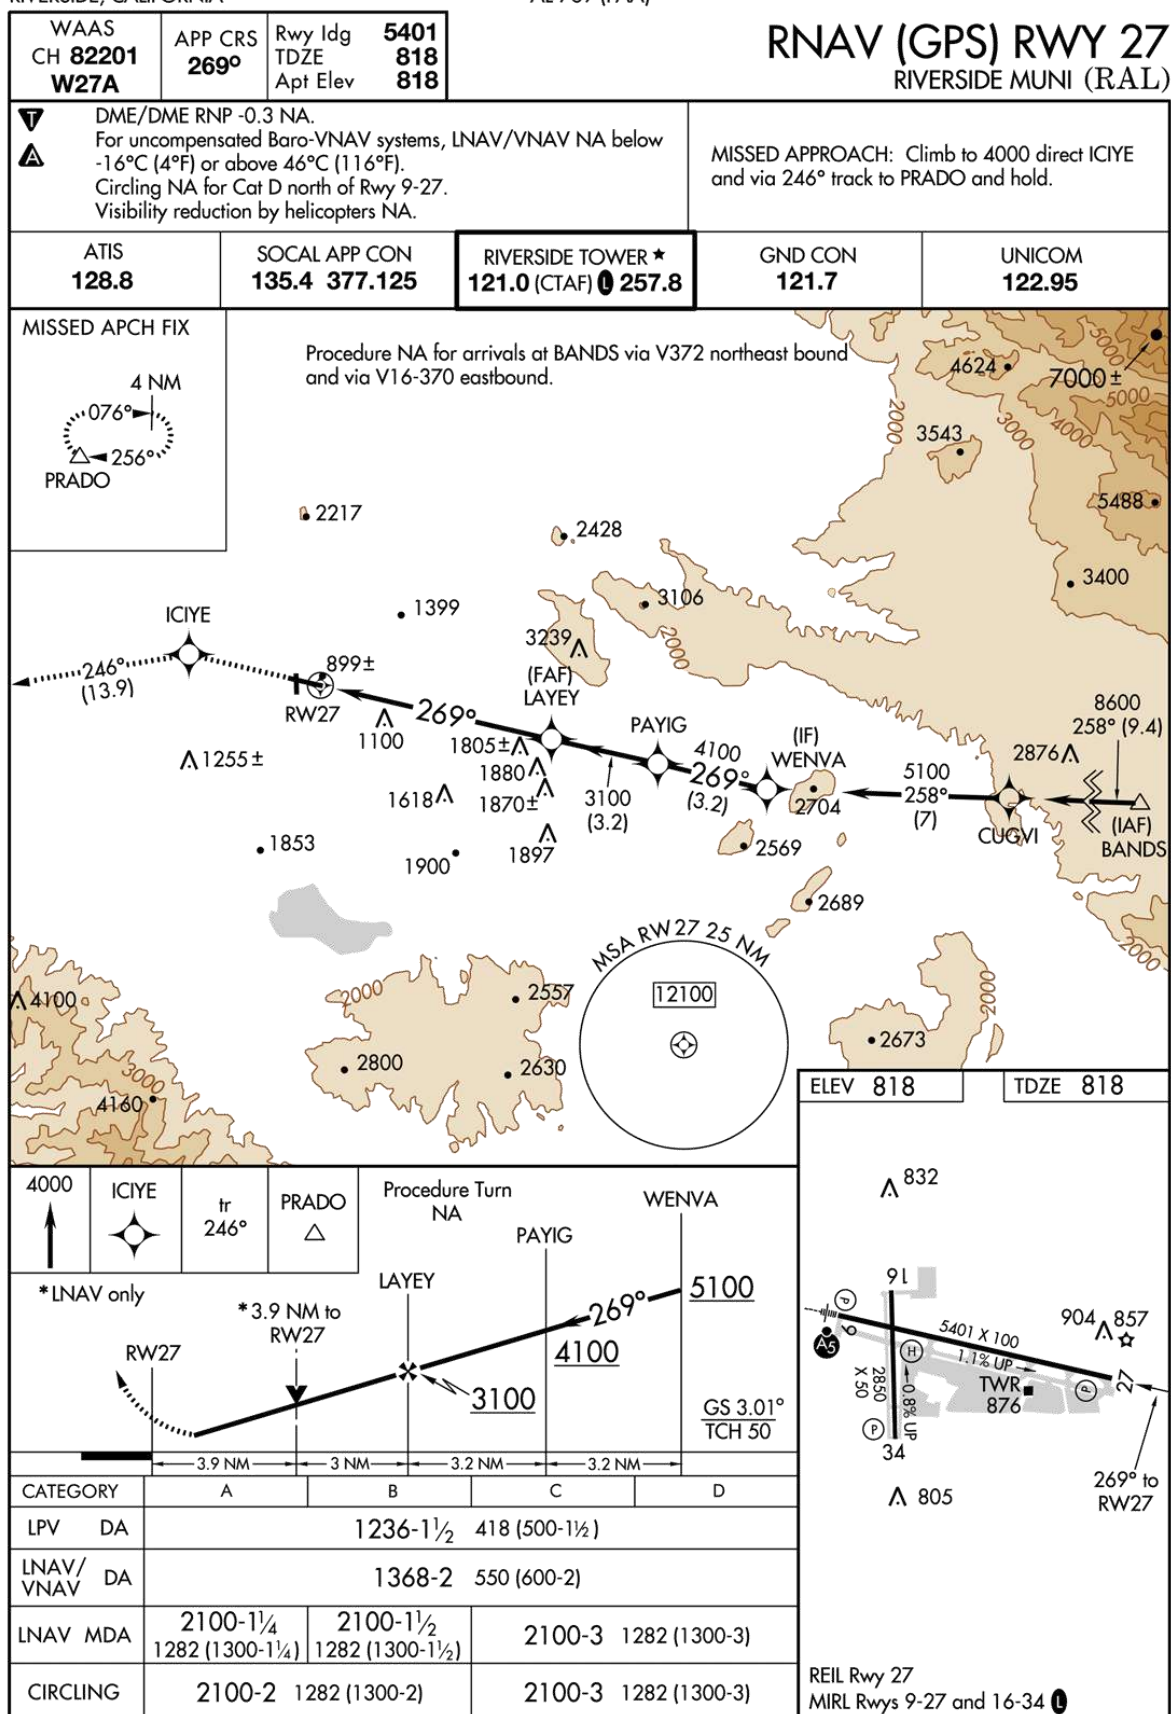

NORTH PLATTE, NEBRASKA

AL-292 (FAA)

13262

WAAS CH 60915 W30A	APP CRS 300°	Rwy Idg THRE 2769 Apt Elev 2777
--	------------------------	---

RNAV (GPS) RWY 30


NORTH PLATTE RGNL AIRPORT LEE BIRD FIELD (LBF)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 52°C (126°F). DME/DME RNP-0.3 NA.
▲ Circling to Rwy 17 NA at night.





MISSED APPROACH: Climb to 4900 direct AGHAN and hold.

ASOS 118.425	DENVER CENTER 132.7 226.675	CLNC DEL 132.7	UNICOM 123.0 (CTAF) 0
------------------------	---------------------------------------	--------------------------	---------------------------------

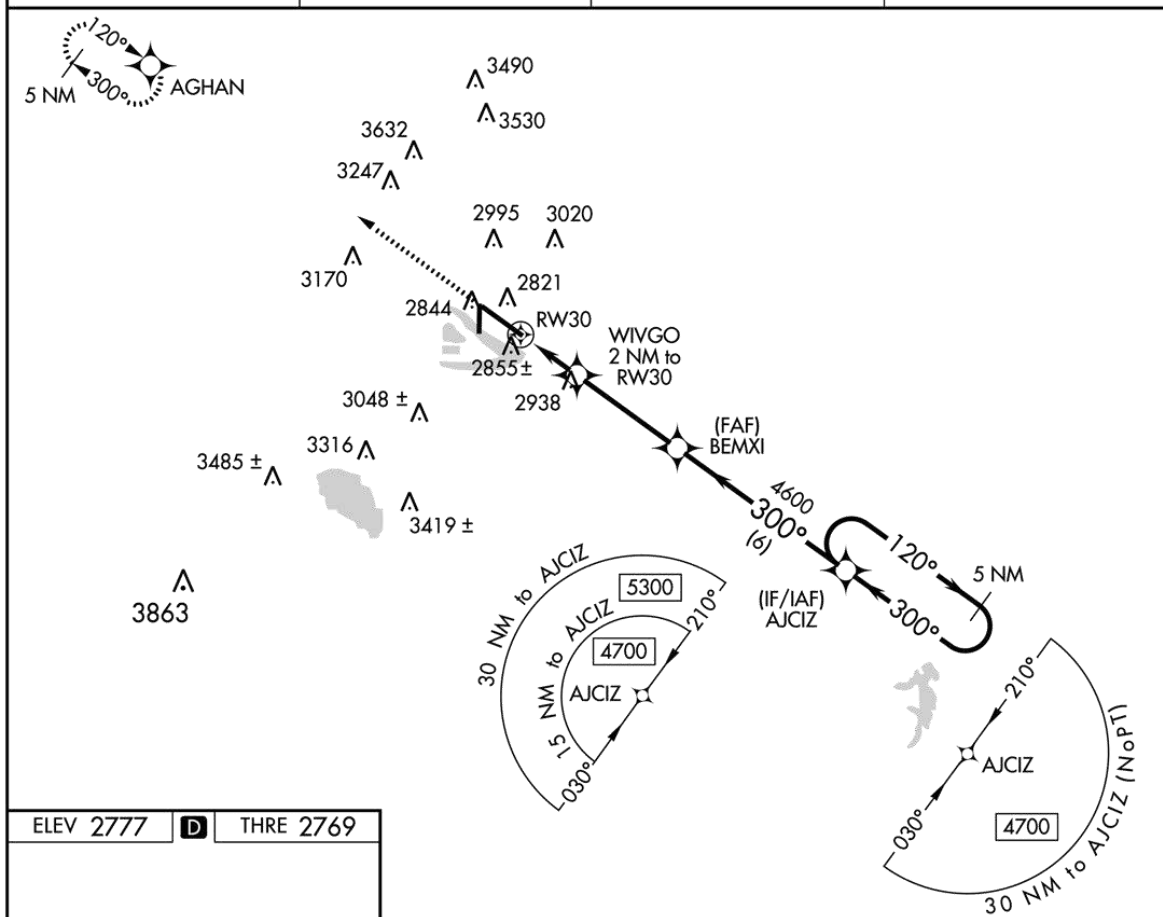

ELEV 2777 **D** THRE 2769

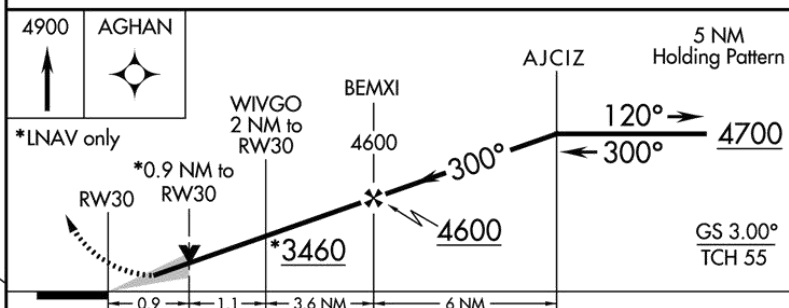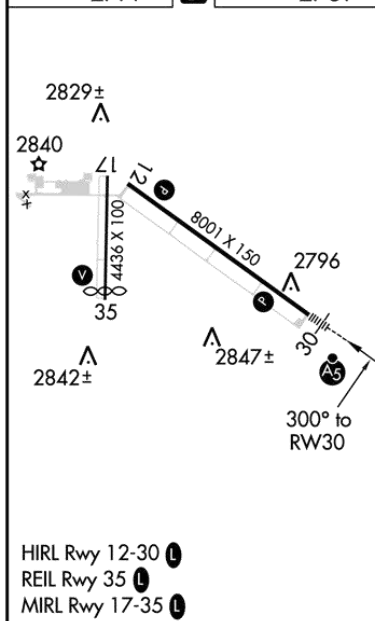

CATEGORY	A	B	C	D
LPV DA		2969-1/2	200 (200-1/2)	
LNAV/VNAV DA		3019-1/2	250 (300-1/2)	
LNAV MDA	3120-1/2	351 (400-1/2)	3120-5/8	351 (400-5/8)
CIRCLING	3280-1 503 (600-1)	3320-1 543 (600-1)	3420-1 3/4 643 (700-1 3/4)	3560-2 1/2 783 (800-2 1/2)

NORTH PLATTE, NEBRASKA

Amdt 2 19SEP13

NORTH PLATTE RGNL AIRPORT LEE BIRD FIELD (LBF)

41°08'N-100°41'W

RNAV (GPS) RWY 30

©ASA

Figure 249. RNAV (GPS) RWY 30 (LBF).

13290

NORRIDGEWOCK, MAINE
Orig-A 03MAY12

CENTRAL MAINE AIRPORT OF NORRIDGEWOCK (OWK)
44°43'N-69°52'W

GPS RWY 3
©ASA

Figure 250. GPS RWY 3 (OWK).

Figure 250. GPS RWY 3 (OWK).

AIRPORT DIAGRAM

AL-730 (FAA)




12264

©ASA

OSHKOSH, WISCONSIN

AL-730 (FAA)

13234

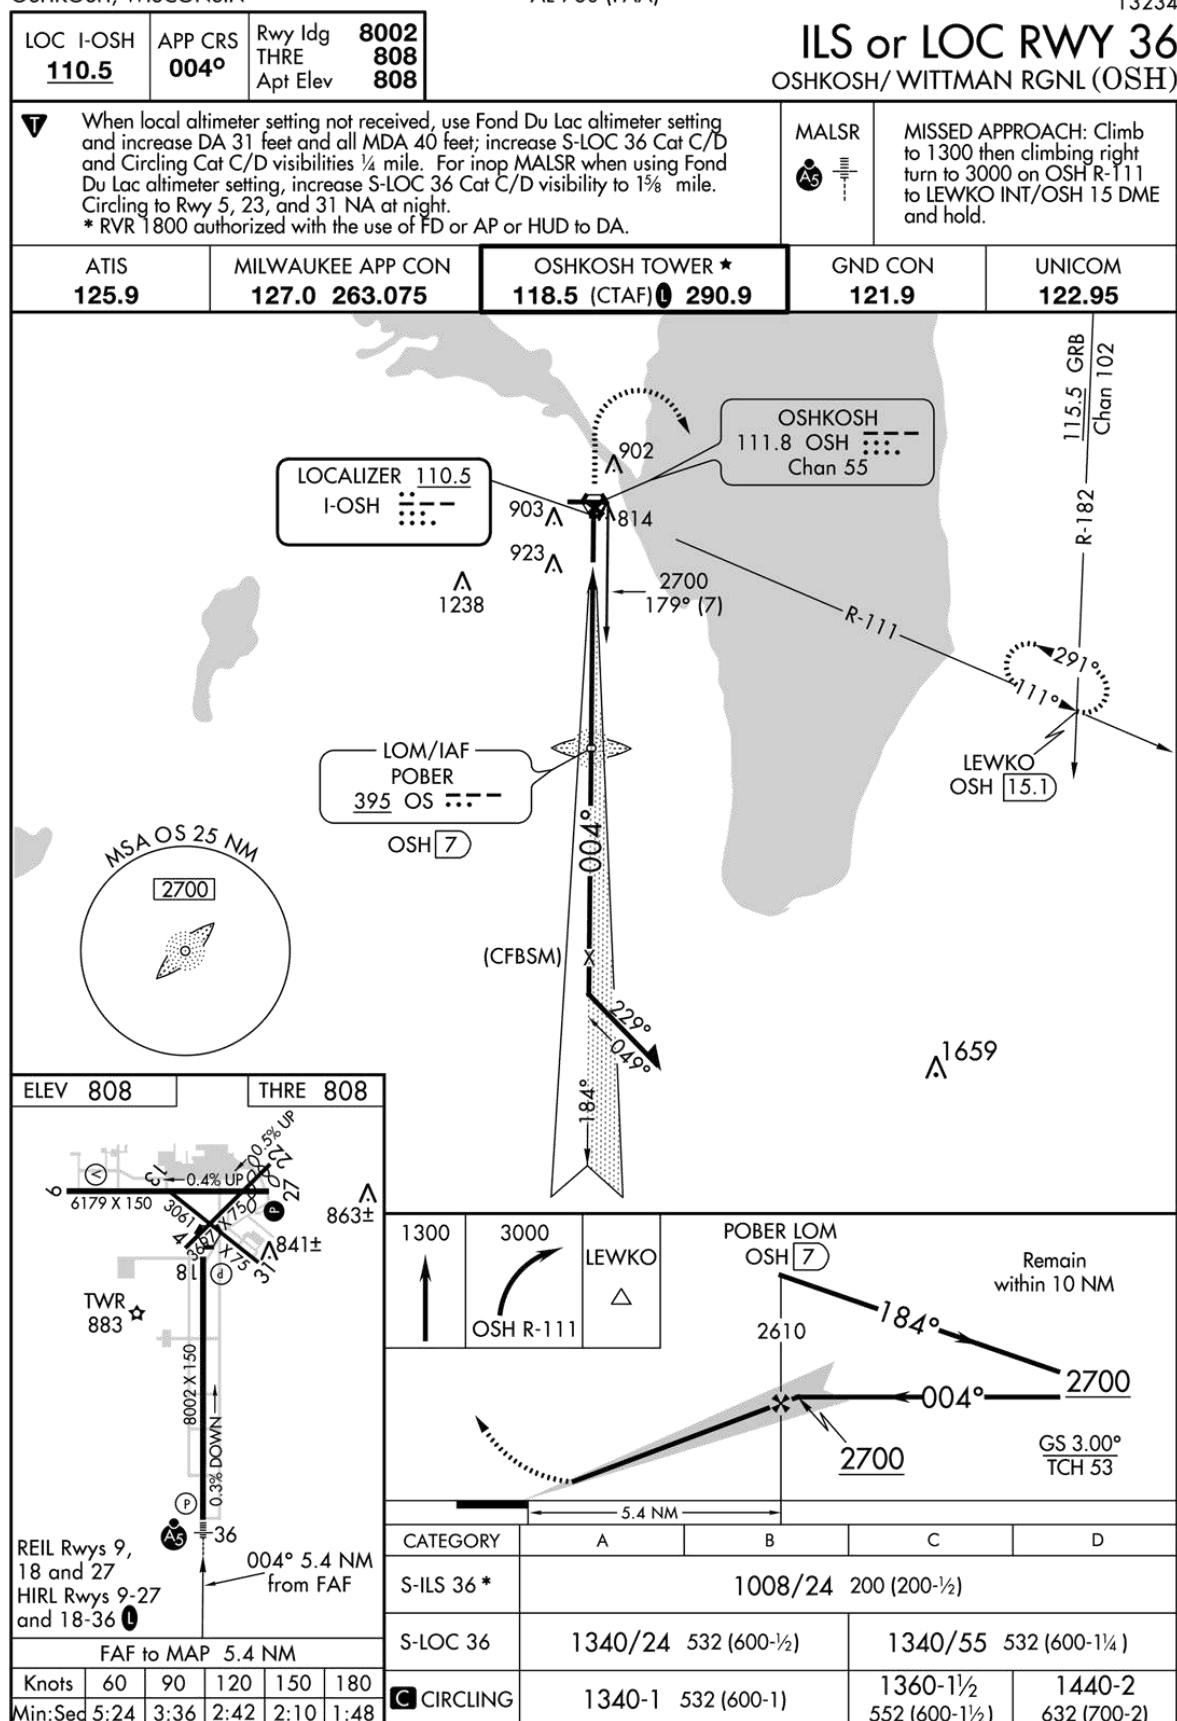

OSHKOSH, WISCONSIN
Amdt 7 22AUG13

43°59'N-88°33'W

OSHKOSH/ WITTMAN RGNL (OSH)
ILS or LOC RWY 36
©ASA

Figure 252. ILS or LOC RWY 36 (OSH).

OSHKOSH, WISCONSIN

AL-730 (FAA)

13234

WAAS CH 58333 W18A	APP CRS 184°	Rwy Idg THRE 8002 Apt Elev 790 808
--	------------------------	--


RNAV (GPS) RWY 18

OSHKOSH/ WITTMAN RGNL (OSH)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). VDP and Baro-VNAV NA when using Fond Du Lac altimeter setting. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all DA 31 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats visibility 1/8 mile, increase LNAV Cat C/D and Circling Cat D visibility 1/4 mile. Helicopter visibility reduction below 3/4 SM NA. Circling to Rwy 5, 23 and 31 NA at night. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 2800 direct
DOCEN and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 290.9	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

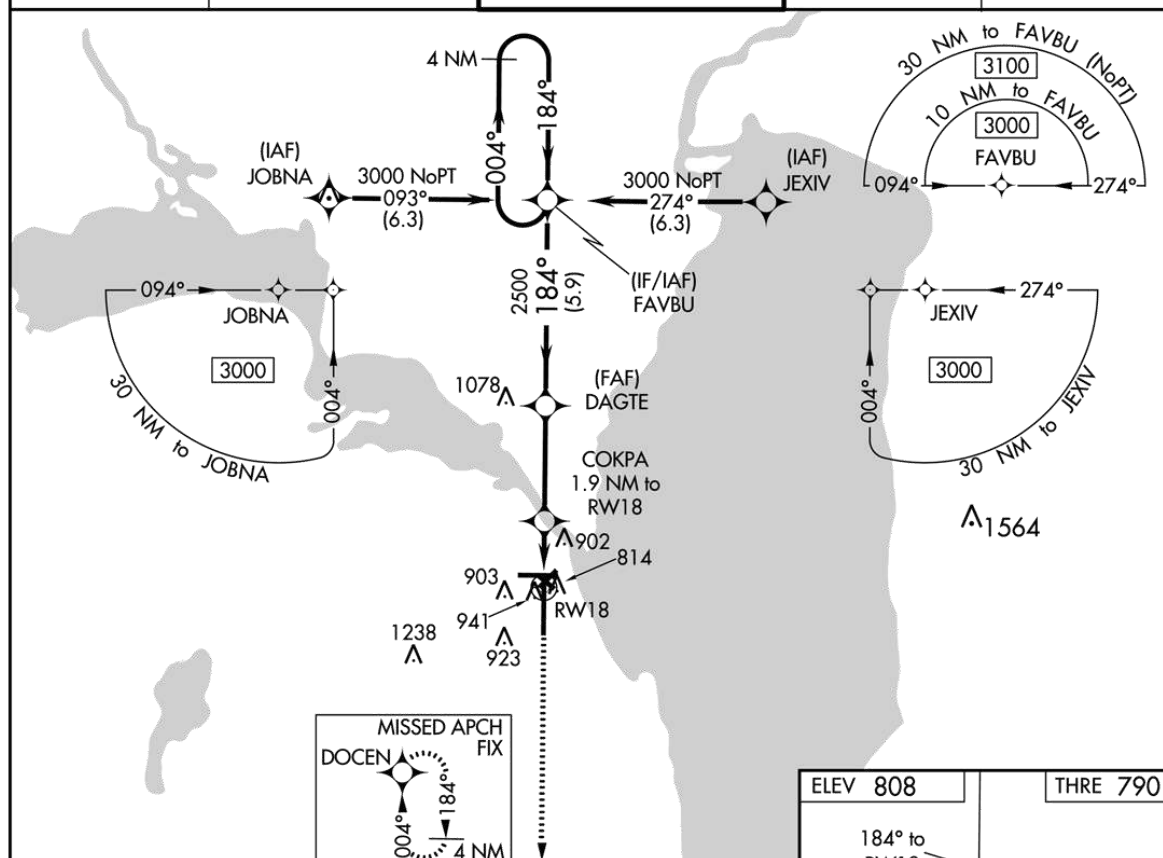

4 NM Holding Pattern		FAVBU	DAGTE	COKPA	2800	DOCEN
3000		← 004°	184° →	184°	2500	
GS 3.00°						
TCH 47						
		5.9 NM	3.3 NM	0.8 NM	1.1 NM	
CATEGORY	A	B	C	D		
LPV DA	1040-3/4		250 (300-3/4)			
LNAV/VNAV DA	1118-1 1/8		328 (400-1 1/8)			
LNAV MDA	1200-1	410 (500-1)	1200-1 1/8	410 (500-1 1/8)		
CIRCLING	1280-1 472 (500-1)	1300-1 492 (500-1)	1360-1 1/2 552 (600-1 1/2)	1440-2 632 (700-2)		

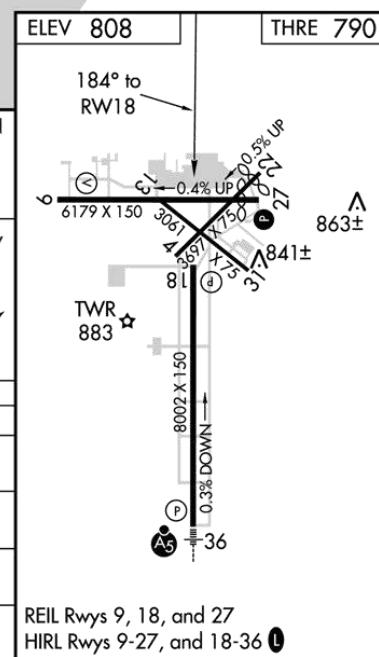

OSHKOSH, WISCONSIN

Amdt 1 22AUG13

43°59'N-88°33'W

RNAV (GPS) RWY 18

OSHKOSH/ WITTMAN RGNL (OSH)

©ASA

Figure 253. RNAV (GPS) RWY 18 (OSH).

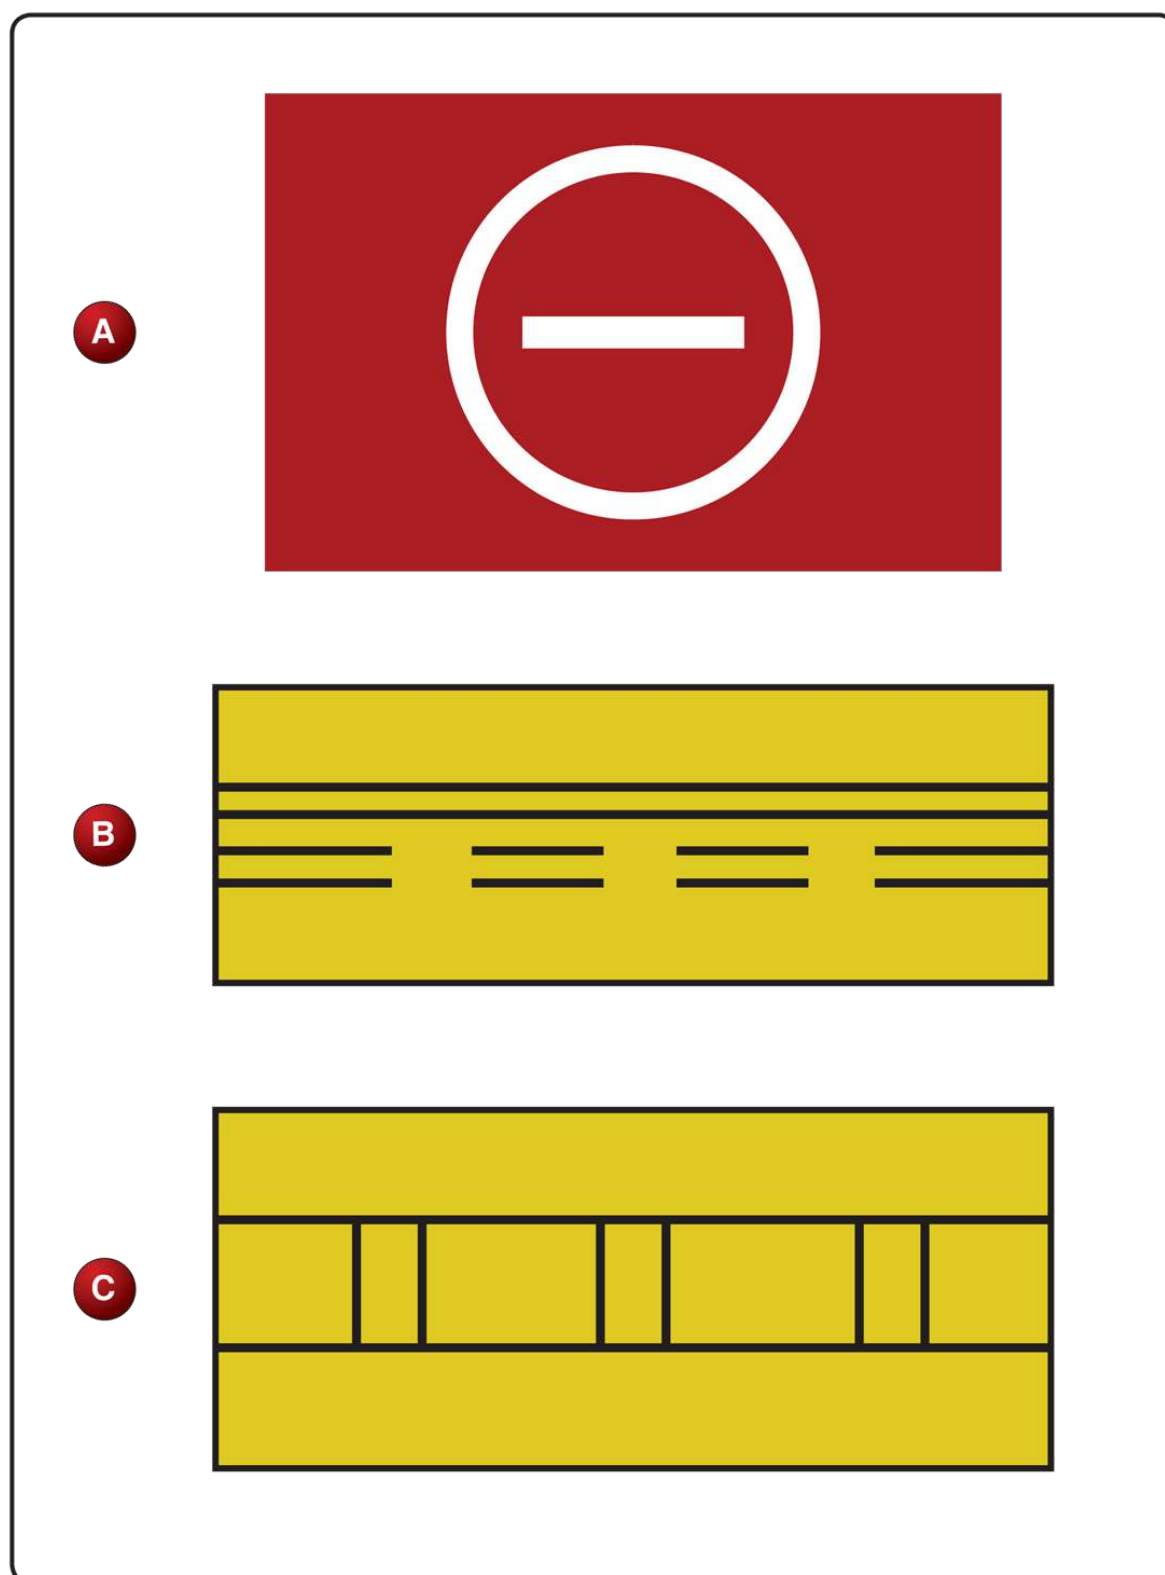


Figure 254. Airport Sign.

©ASA

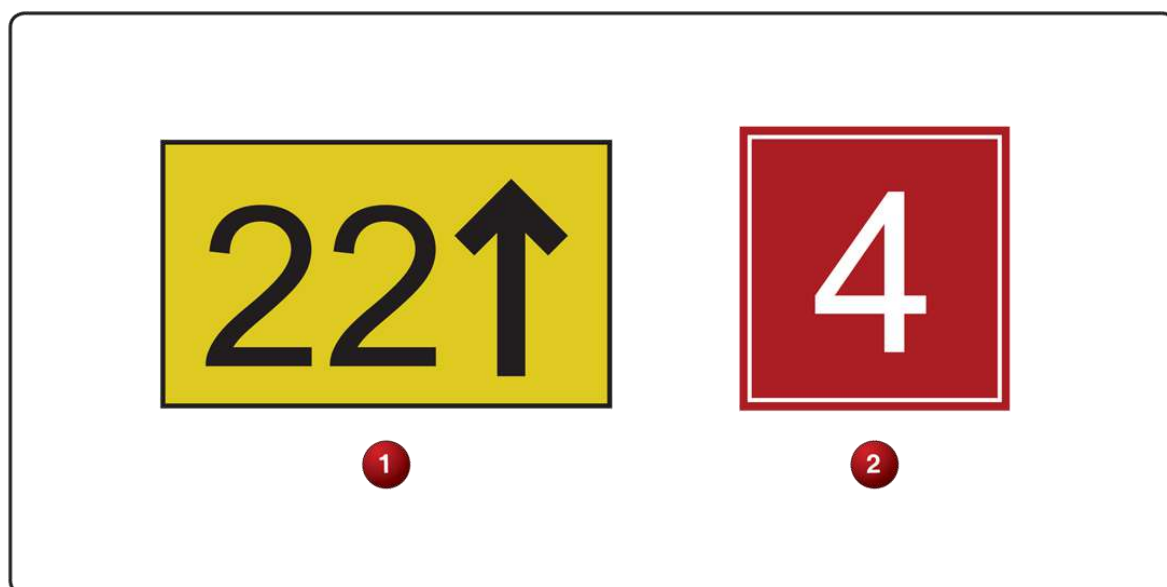


Figure 255. Two Signs.

©ASA

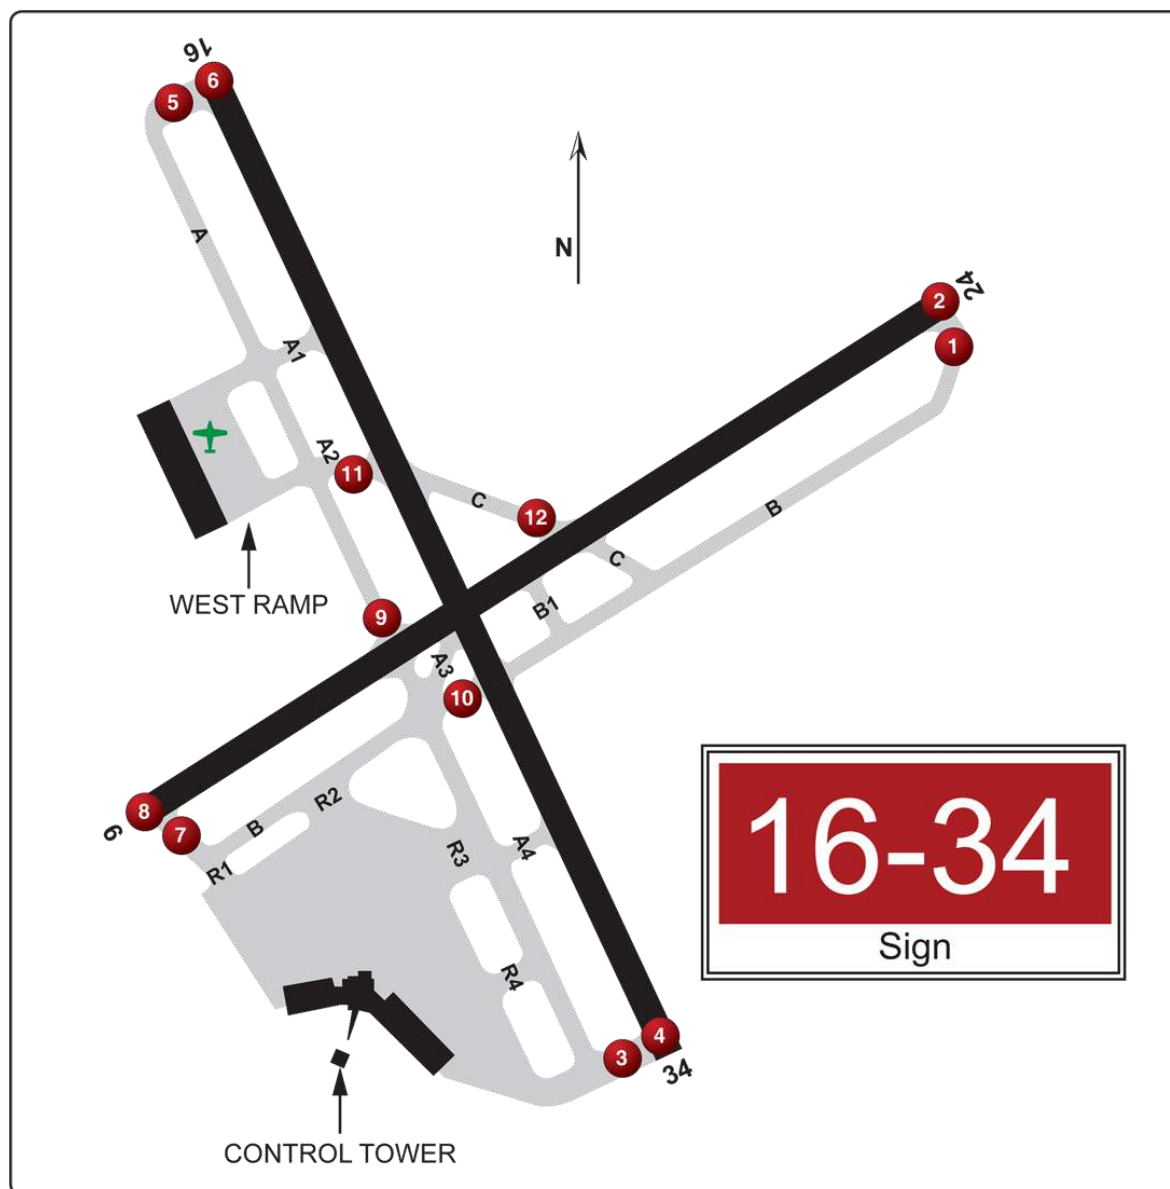


Figure 256. Airport Diagram and Sign.

©ASA

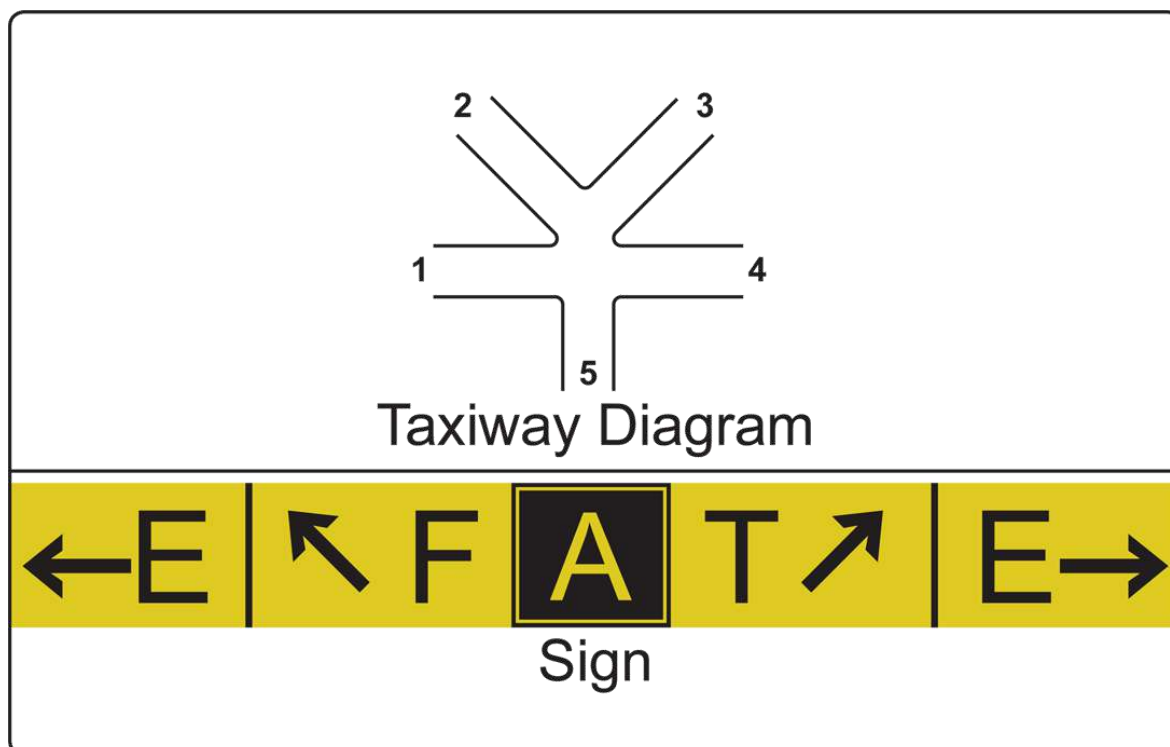


Figure 257. Taxiway Diagram and Sign.

©ASA



Figure 258. Instrument Landing System (ILS) Critical Area Markings.

©ASA

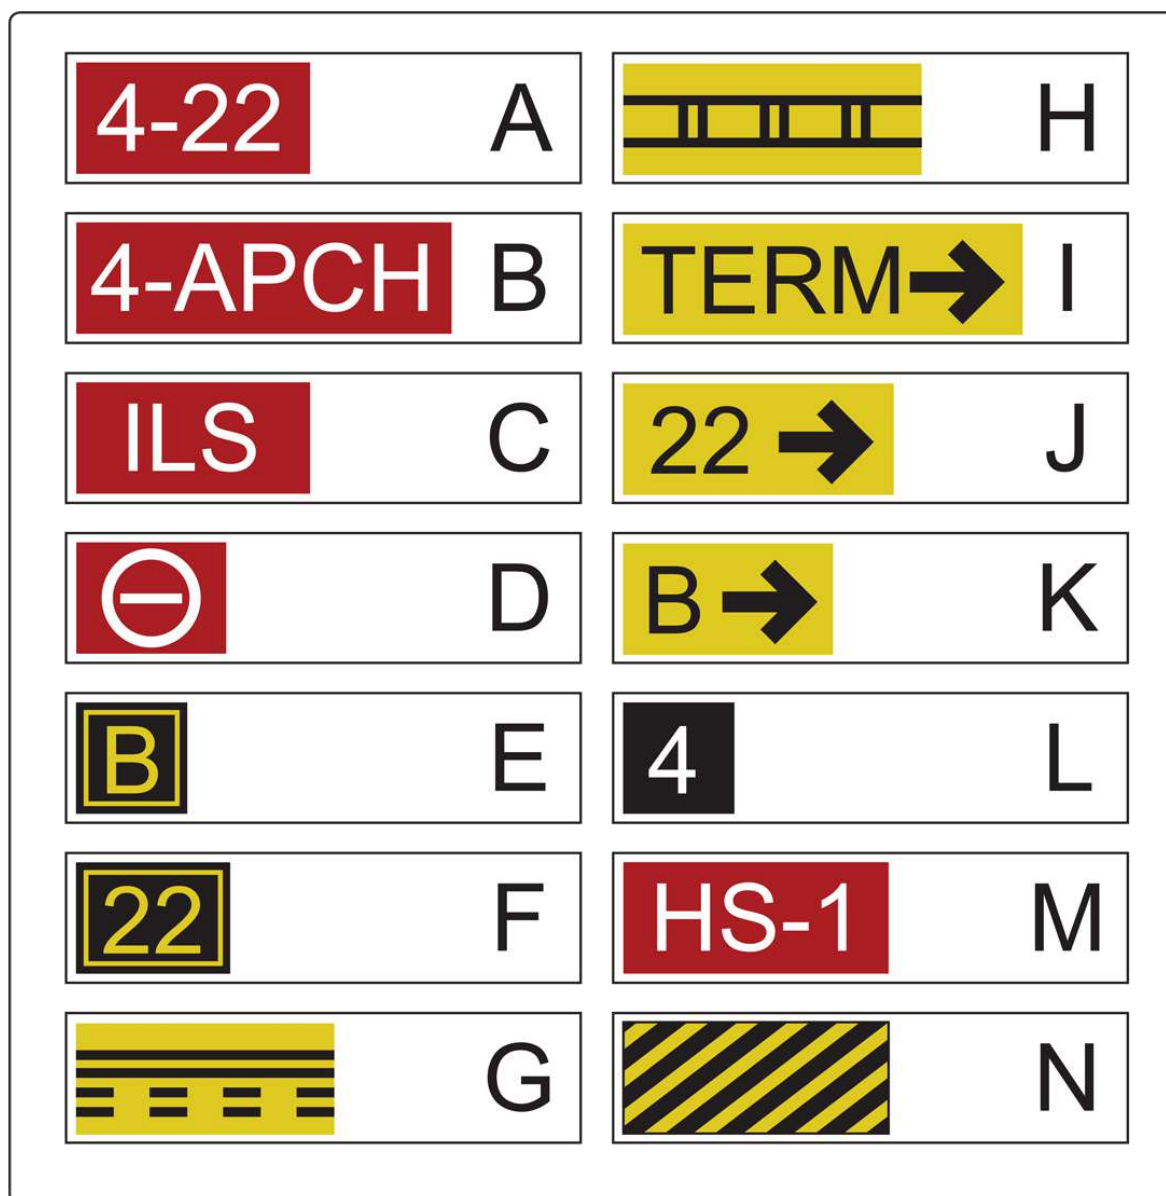


Figure 259. Airport Signs.

©ASA

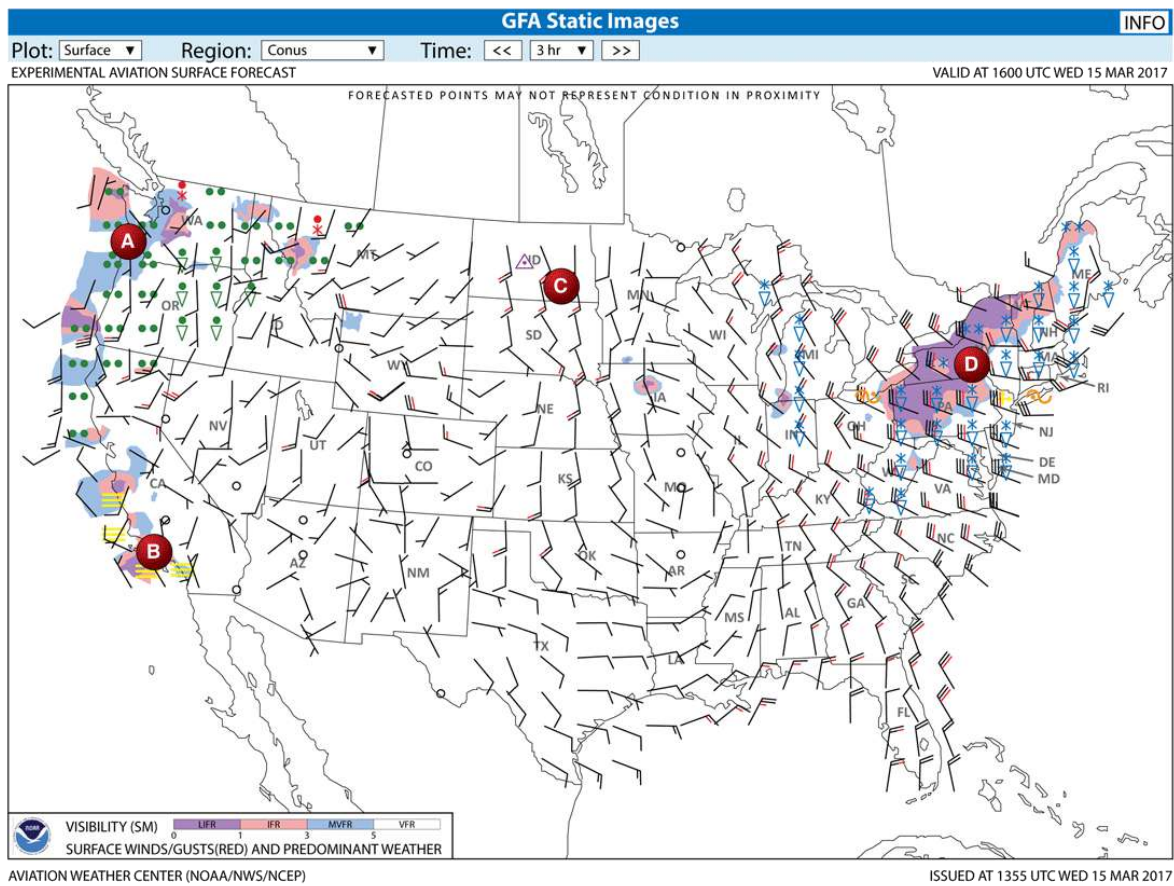


Figure 260. Graphical Forecast for Aviation

©ASA

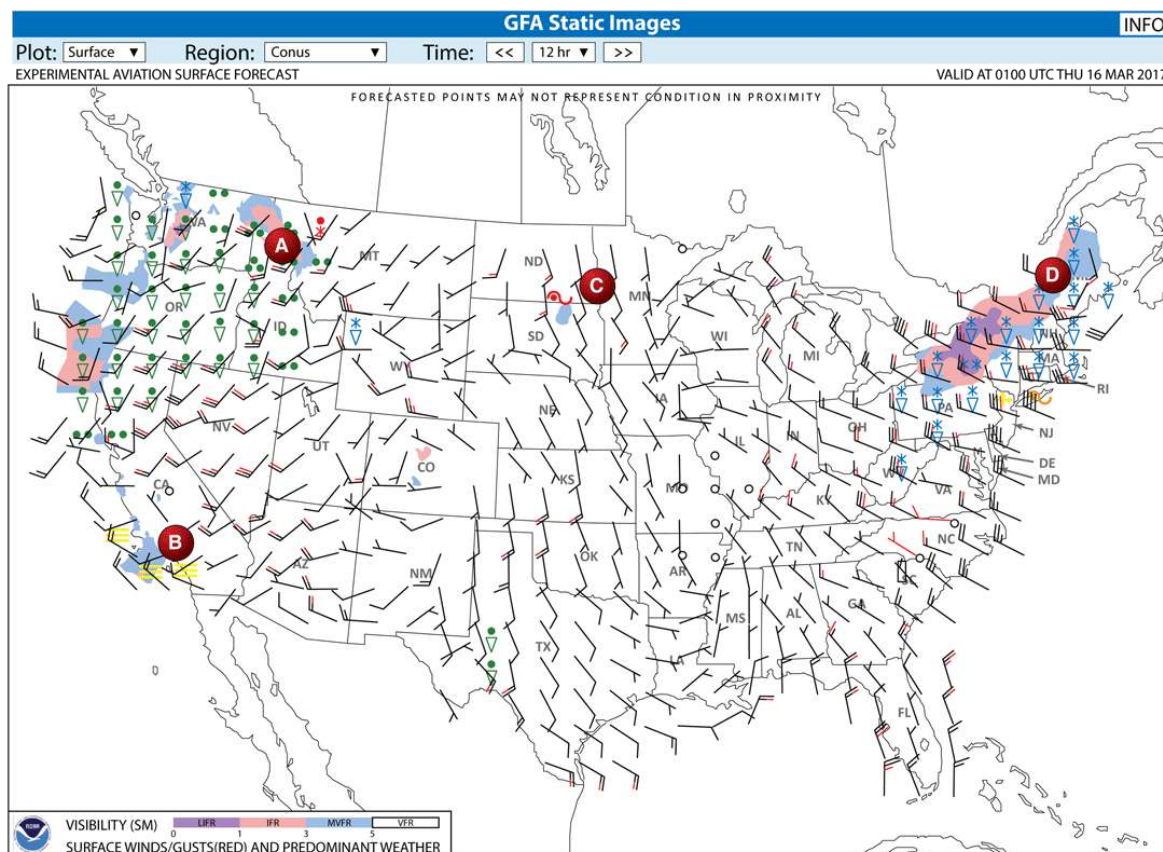


Figure 261. Graphical Forecast for Aviation.

©ASA


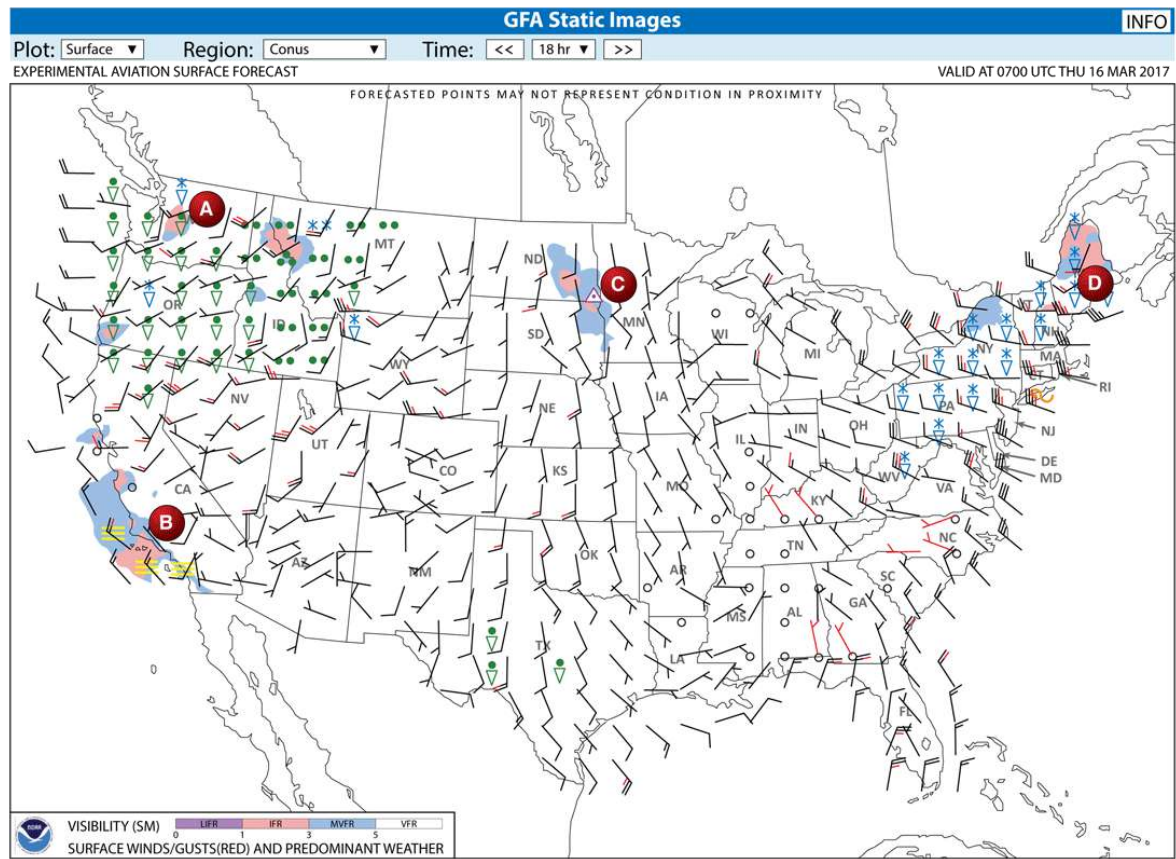


Figure 262. Graphical Forecast for Aviation.

©ASA



ISSUED AT 1402 UTC WED 15 MAR 2017

©ASA


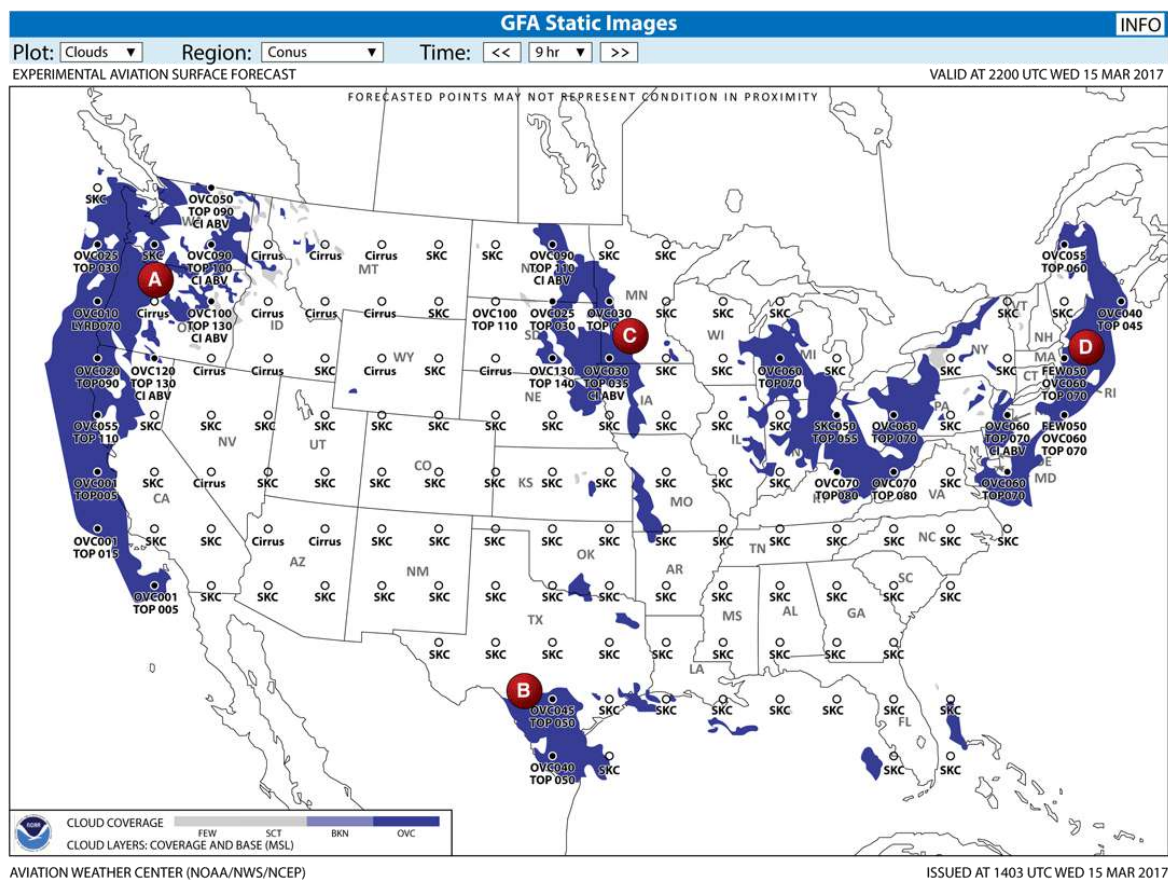


Figure 264. Graphical Forecast for Aviation.

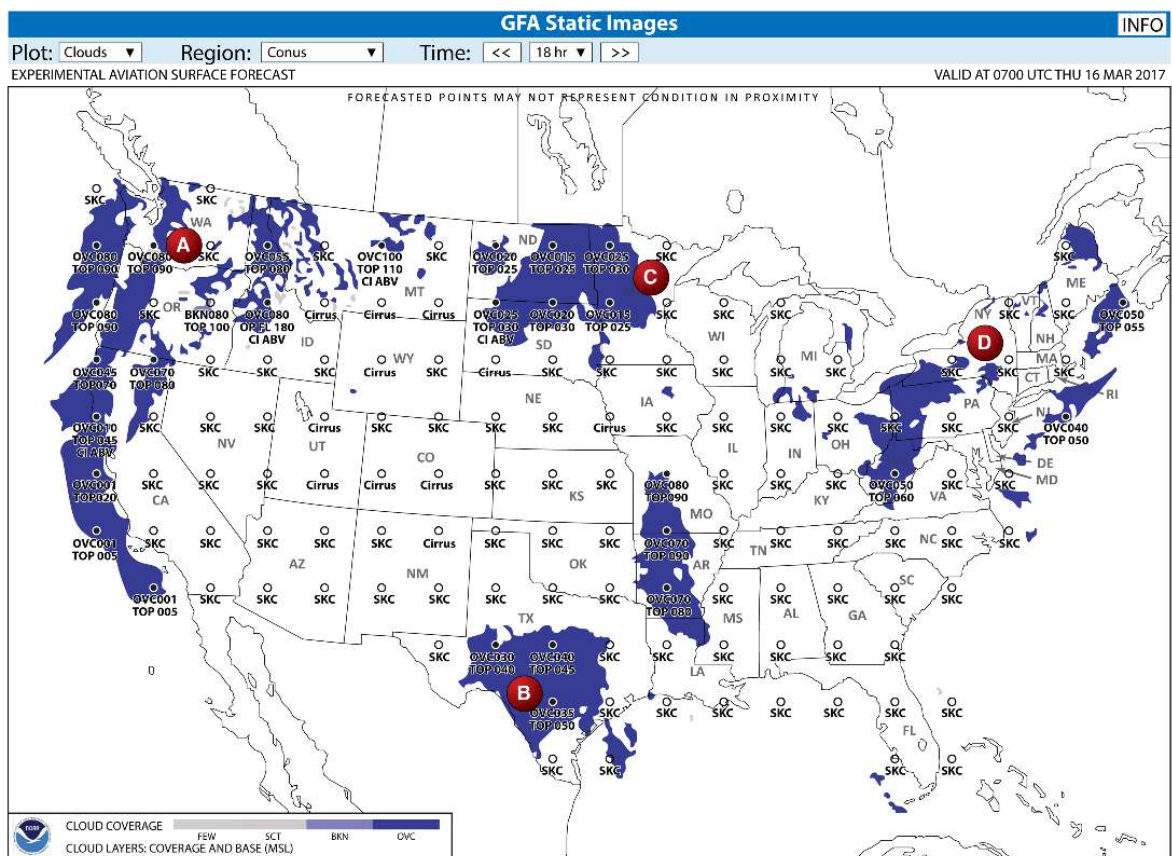


AVIATION WEATHER CENTER (NOAA/NWS/NCEP)

ISSUED AT 1404 UTC WED 15 MAR 2017

Figure 265. Graphical Forecast for Aviation.

©ASA

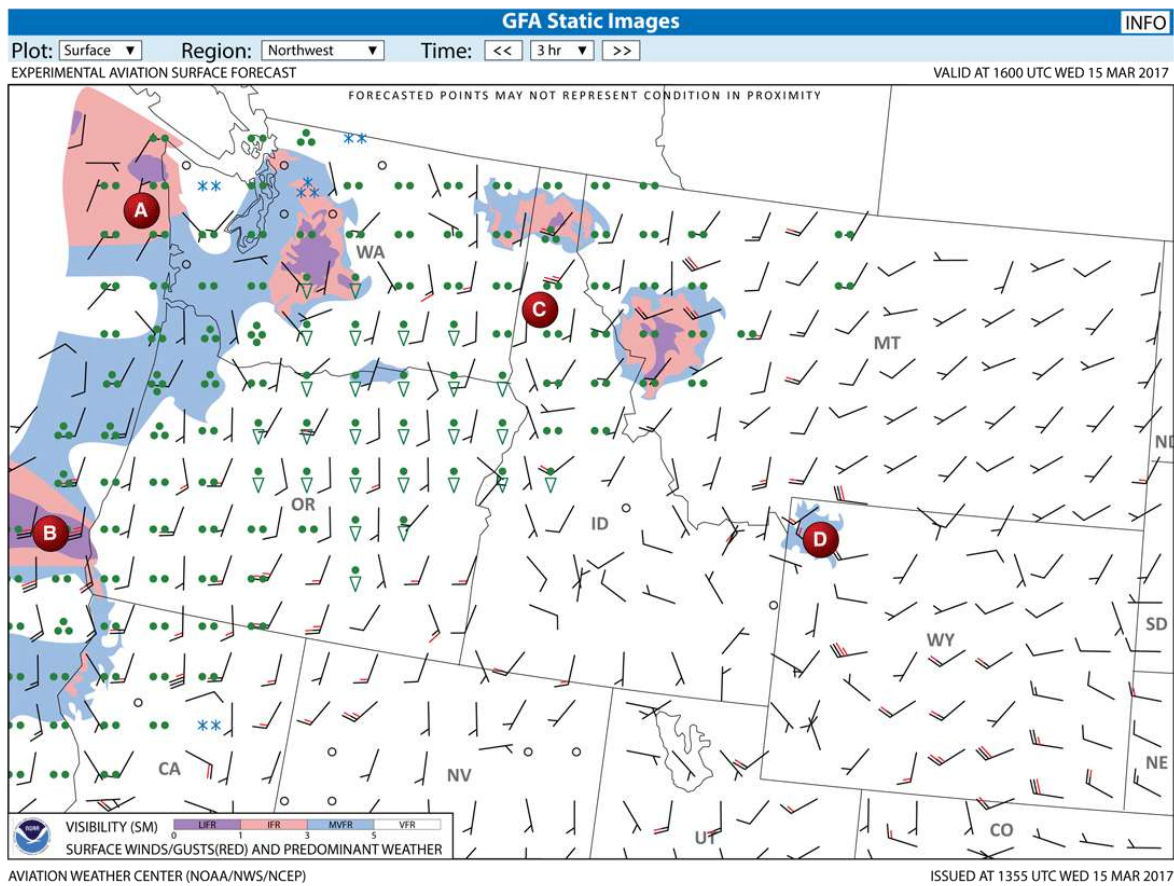

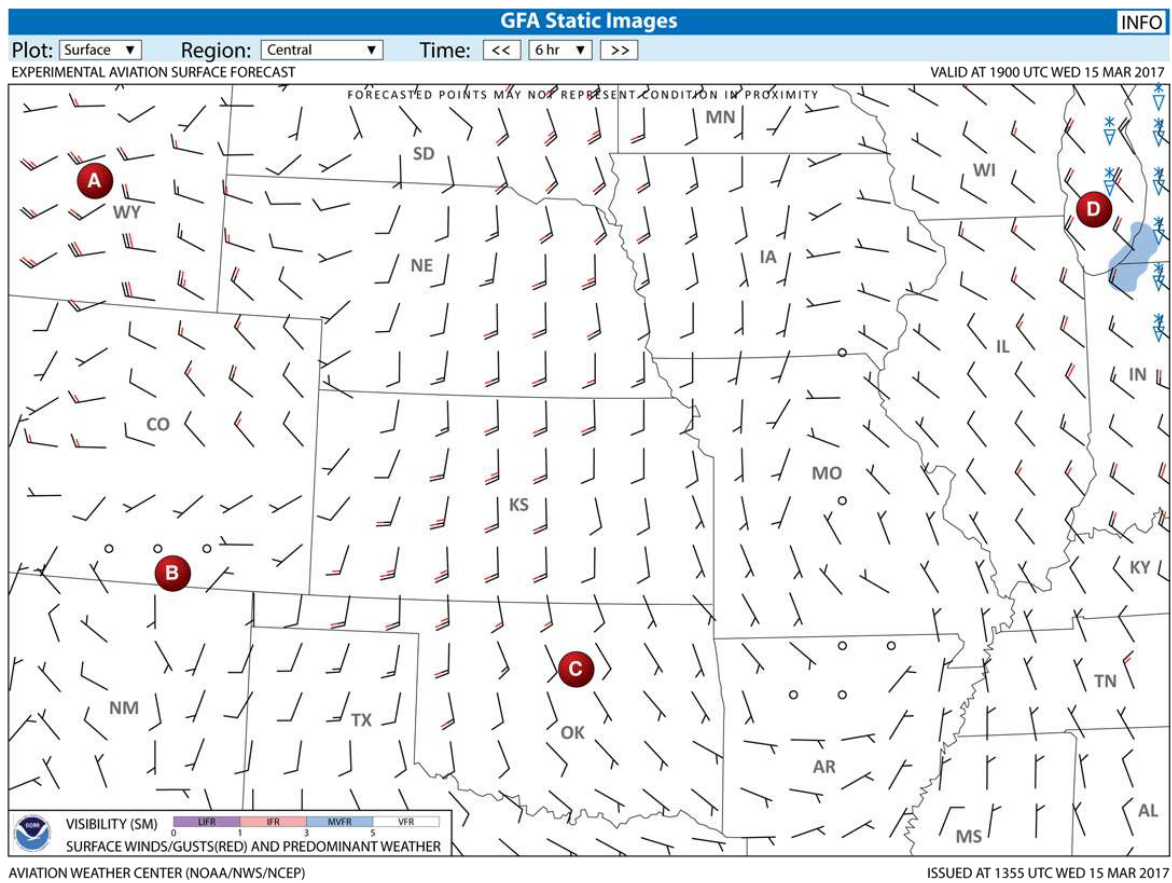
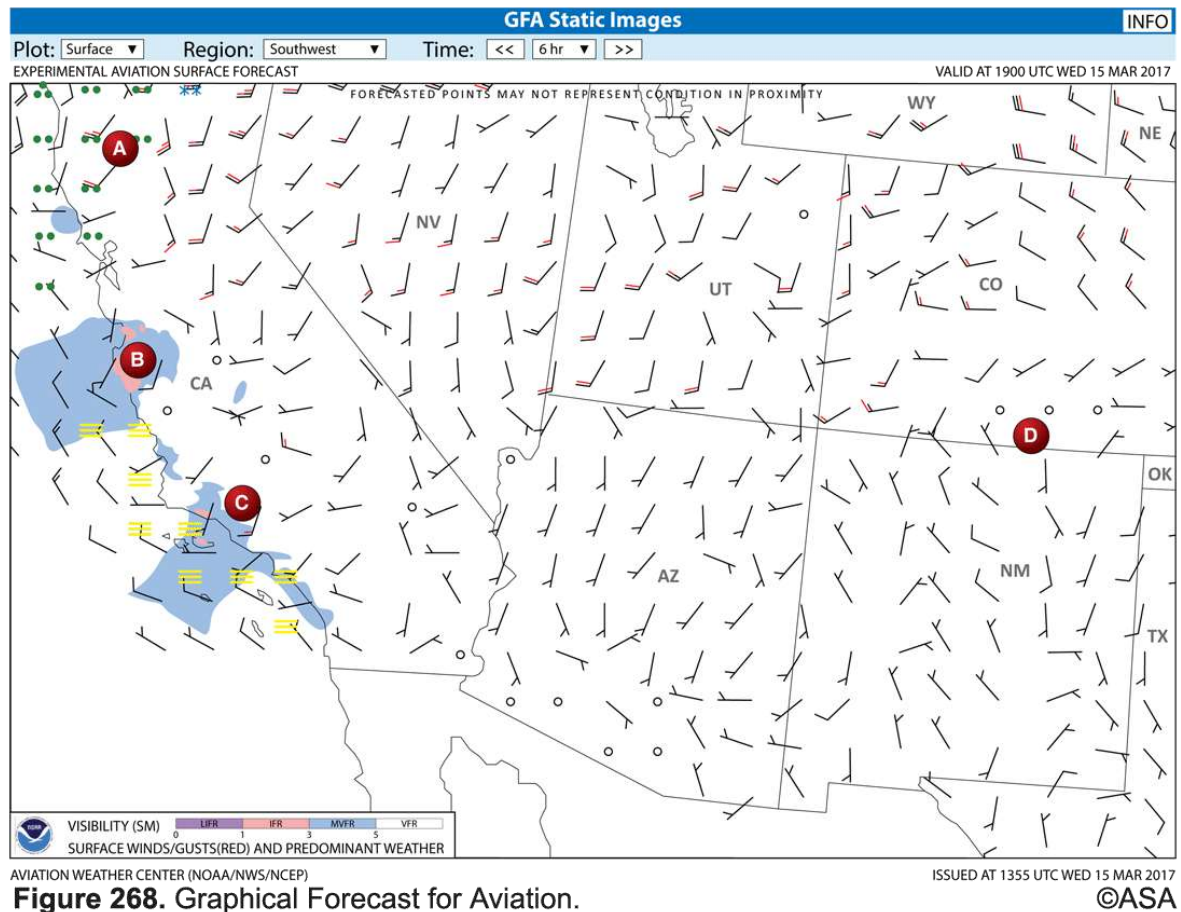


Figure 267. Graphical Forecast for Aviation.



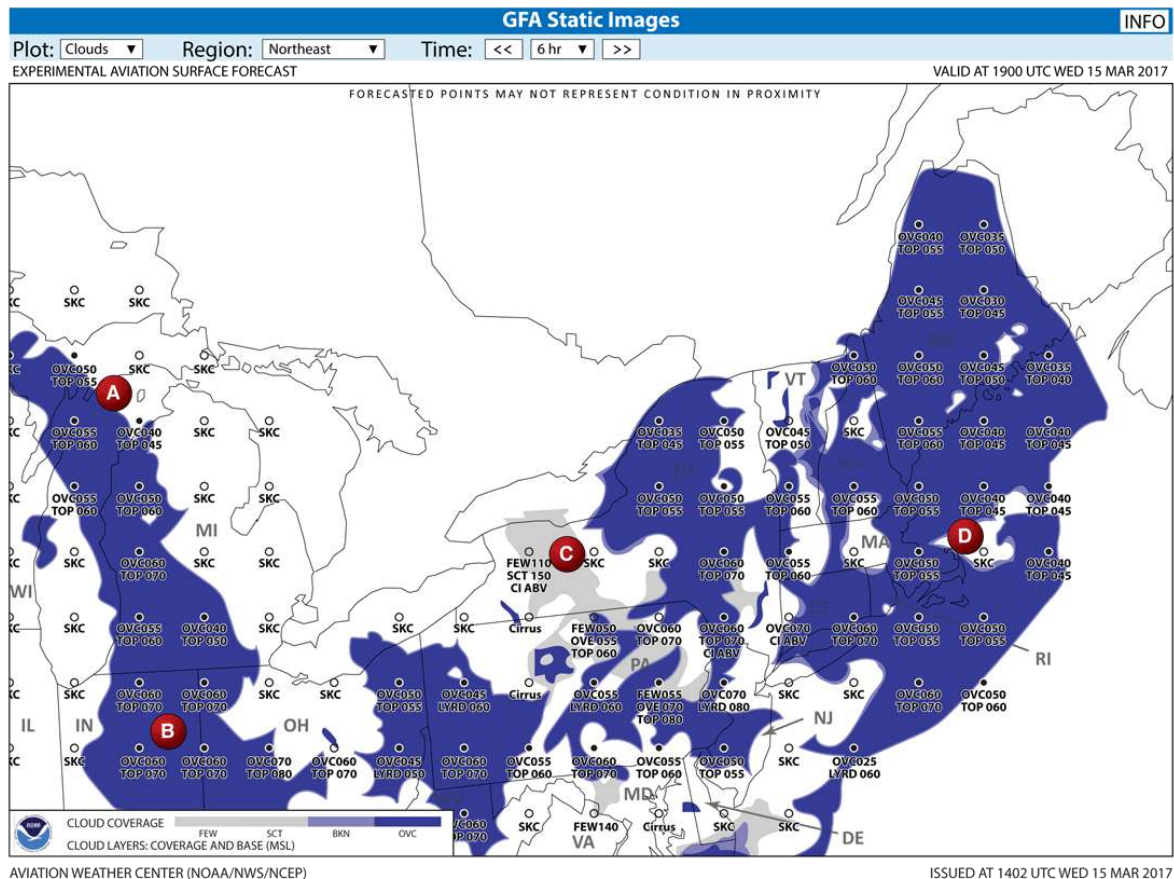


Figure 269. Graphical Forecast for Aviation.

©ASA

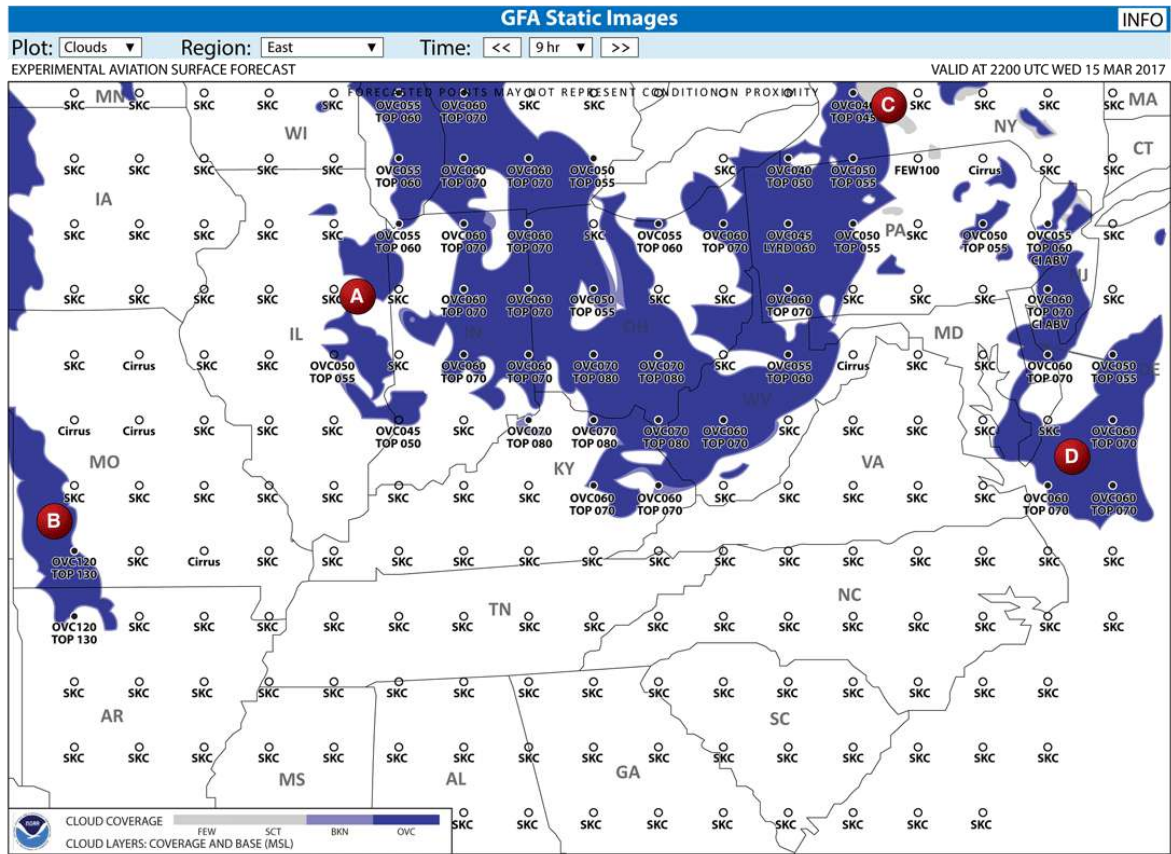


Figure 270. Graphical Forecast for Aviation.

©ASA

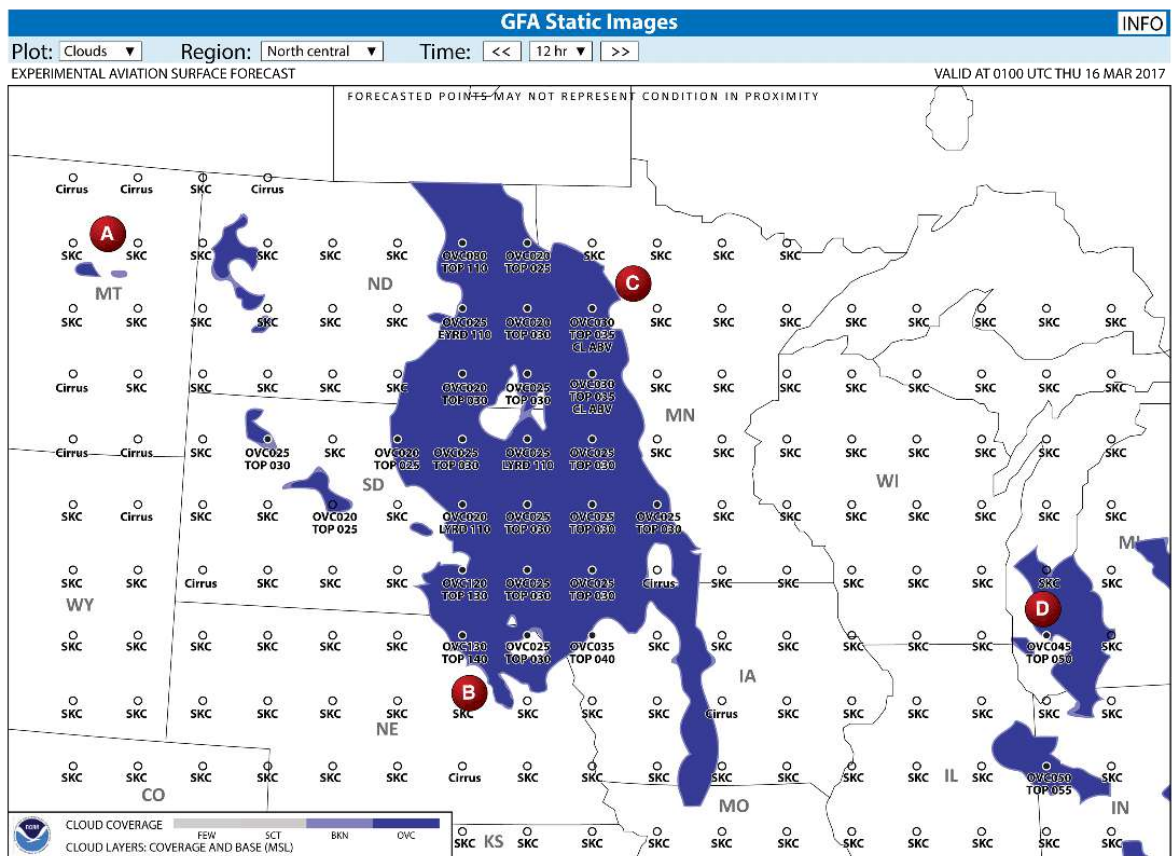


Figure 271. Graphical Forecast for Aviation.

©ASA